

Client Name

Project Name

Organization Name

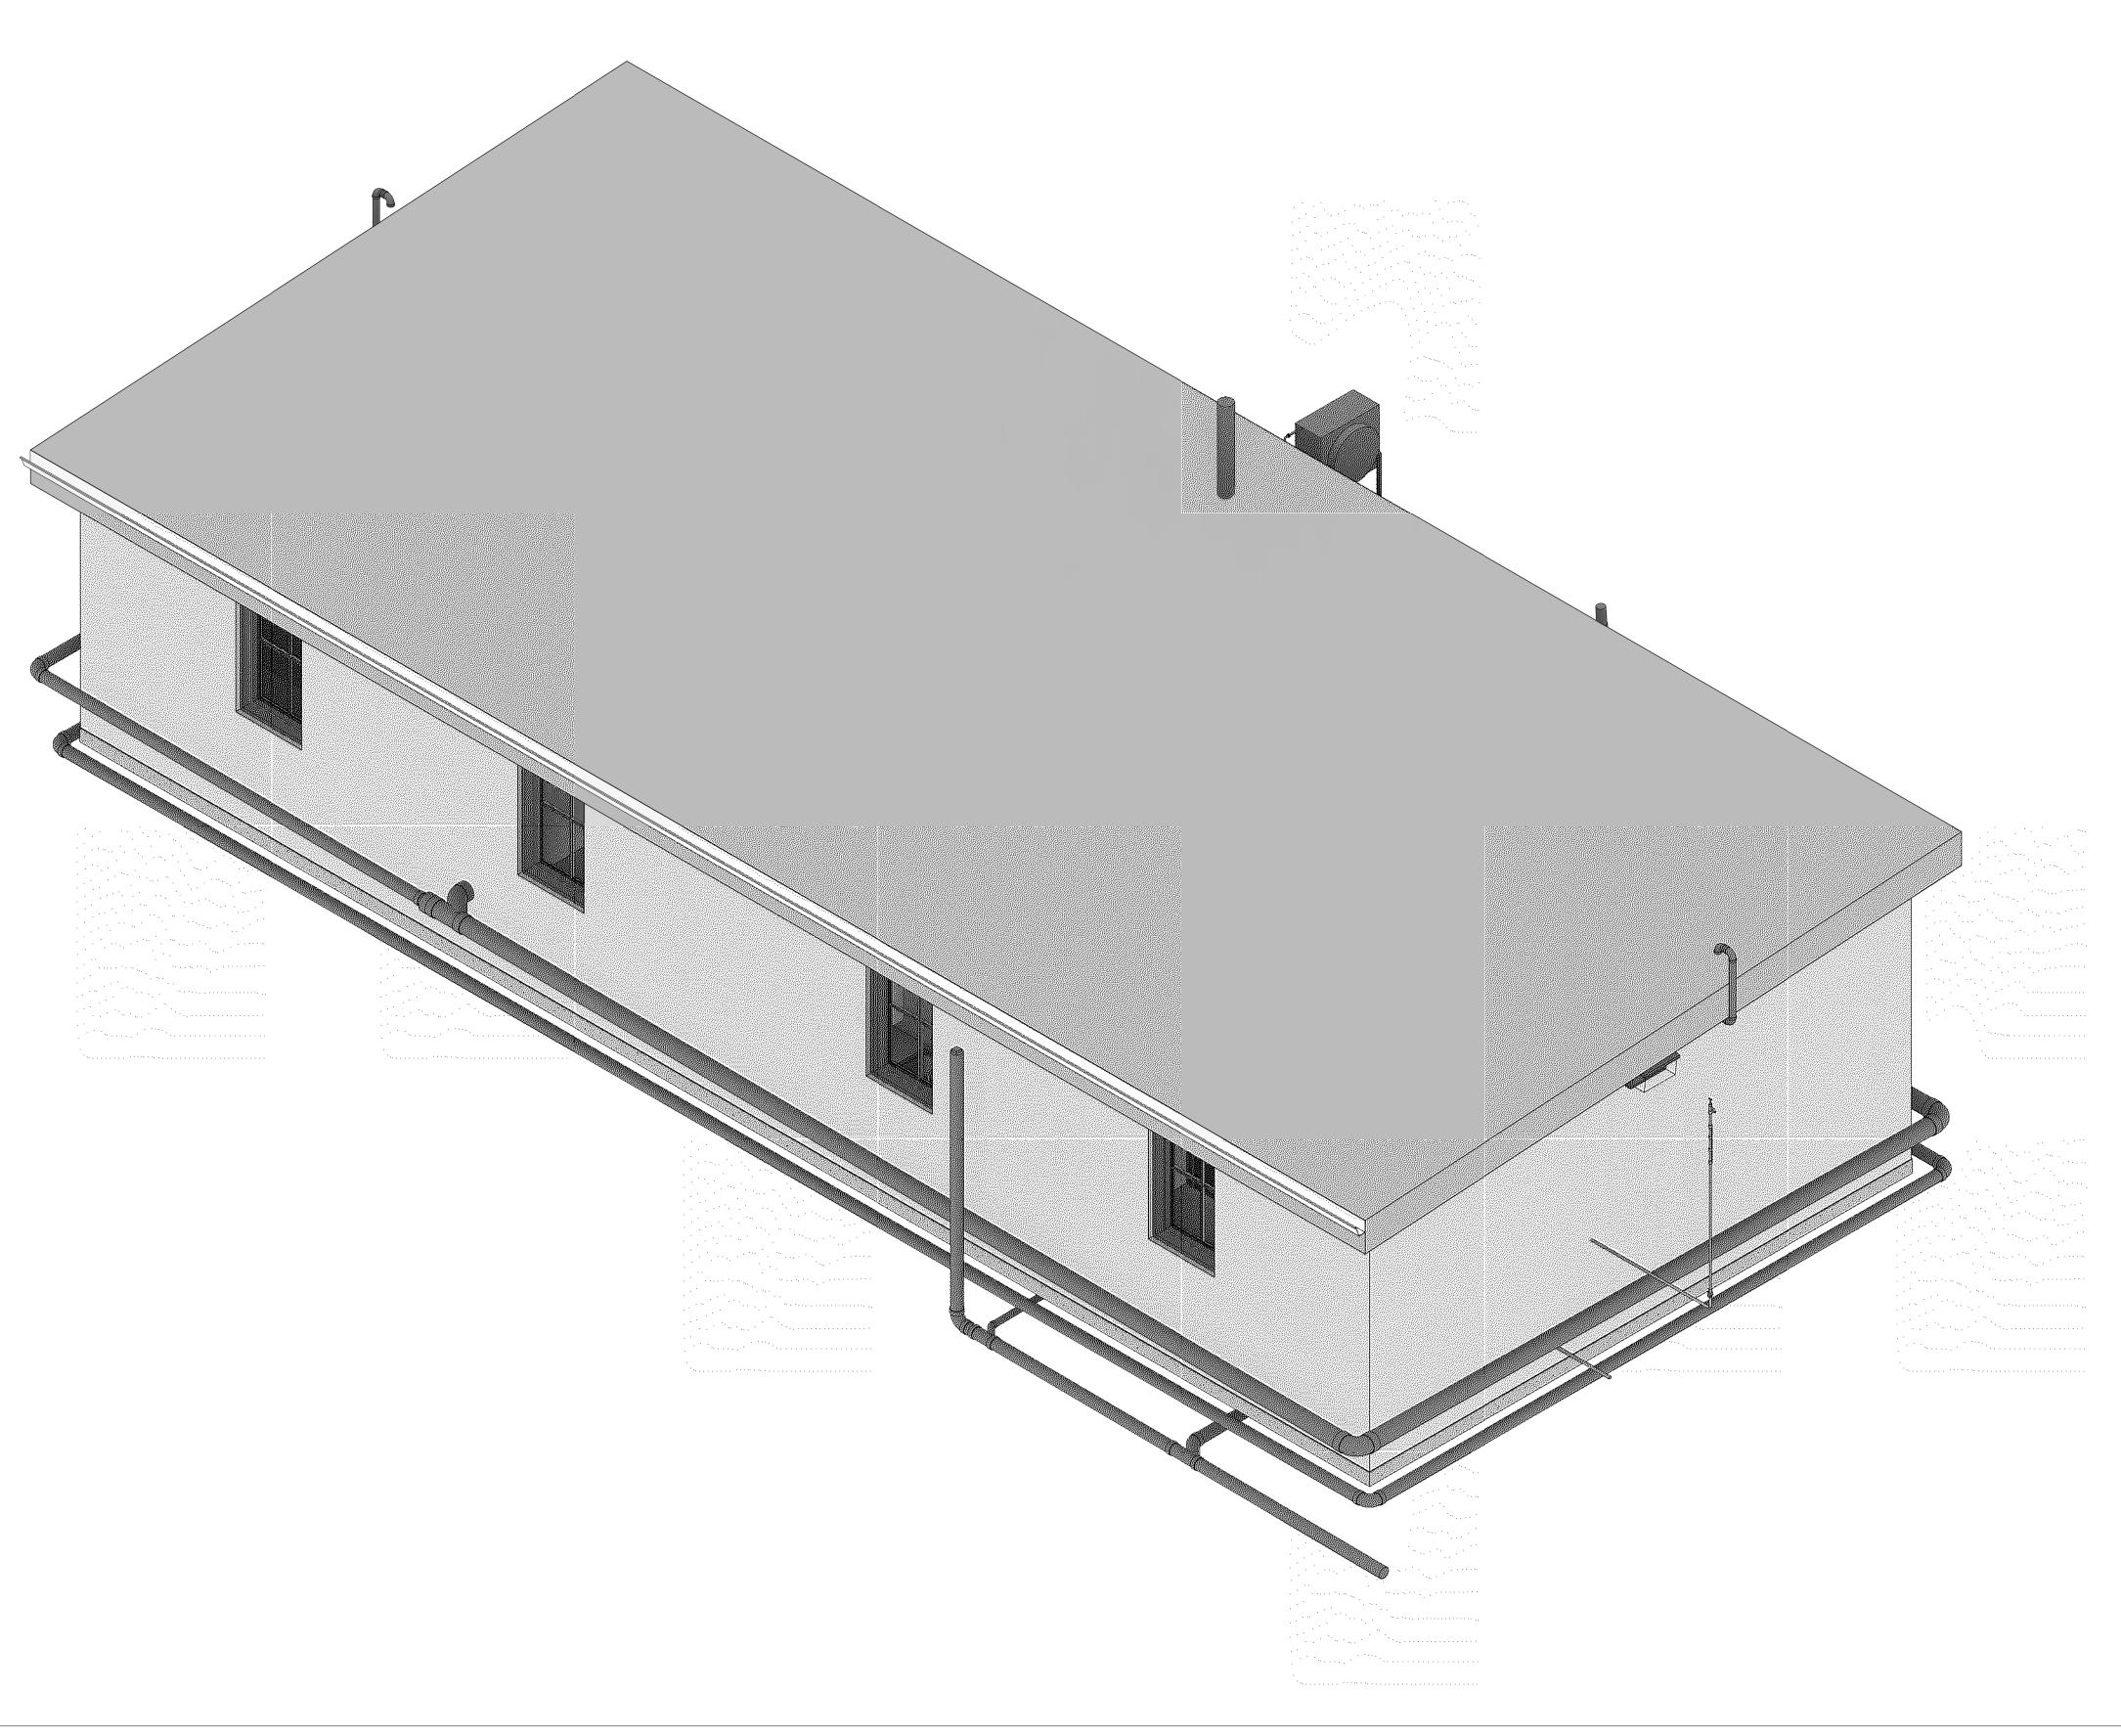

	Sheet Index		
Sheet Number	Sheet Name		
General			
G100	Cover		
Civil			
C101	Site Plan		
C901	Site Isometric		
Structural			
S101	Structural Plans		
S301	Structural Building Sections		
S501	Strucutral Details		
Architectura	al		
A101	Architectural Floor Plans		
A102	Architectural Floor Plans		
A201	Architectural Building Elevations		
A202	Architectural Building Elevations		
A301	Architectural Building Sections		
A401	Architectural Enlarged Views		
A501	Architectural Details		
A601	Architectural Schedules		
Plumbing			
P101	Plumbing Plans		
P601	Plumbing Schedules		
Mechanical			
M101	Mechanical Plans		
M301	Mechanical Sections		
M601	Mechanical Schedules		
Electrical			
E101	Electrical Plans		
E601	Panel Schedule		

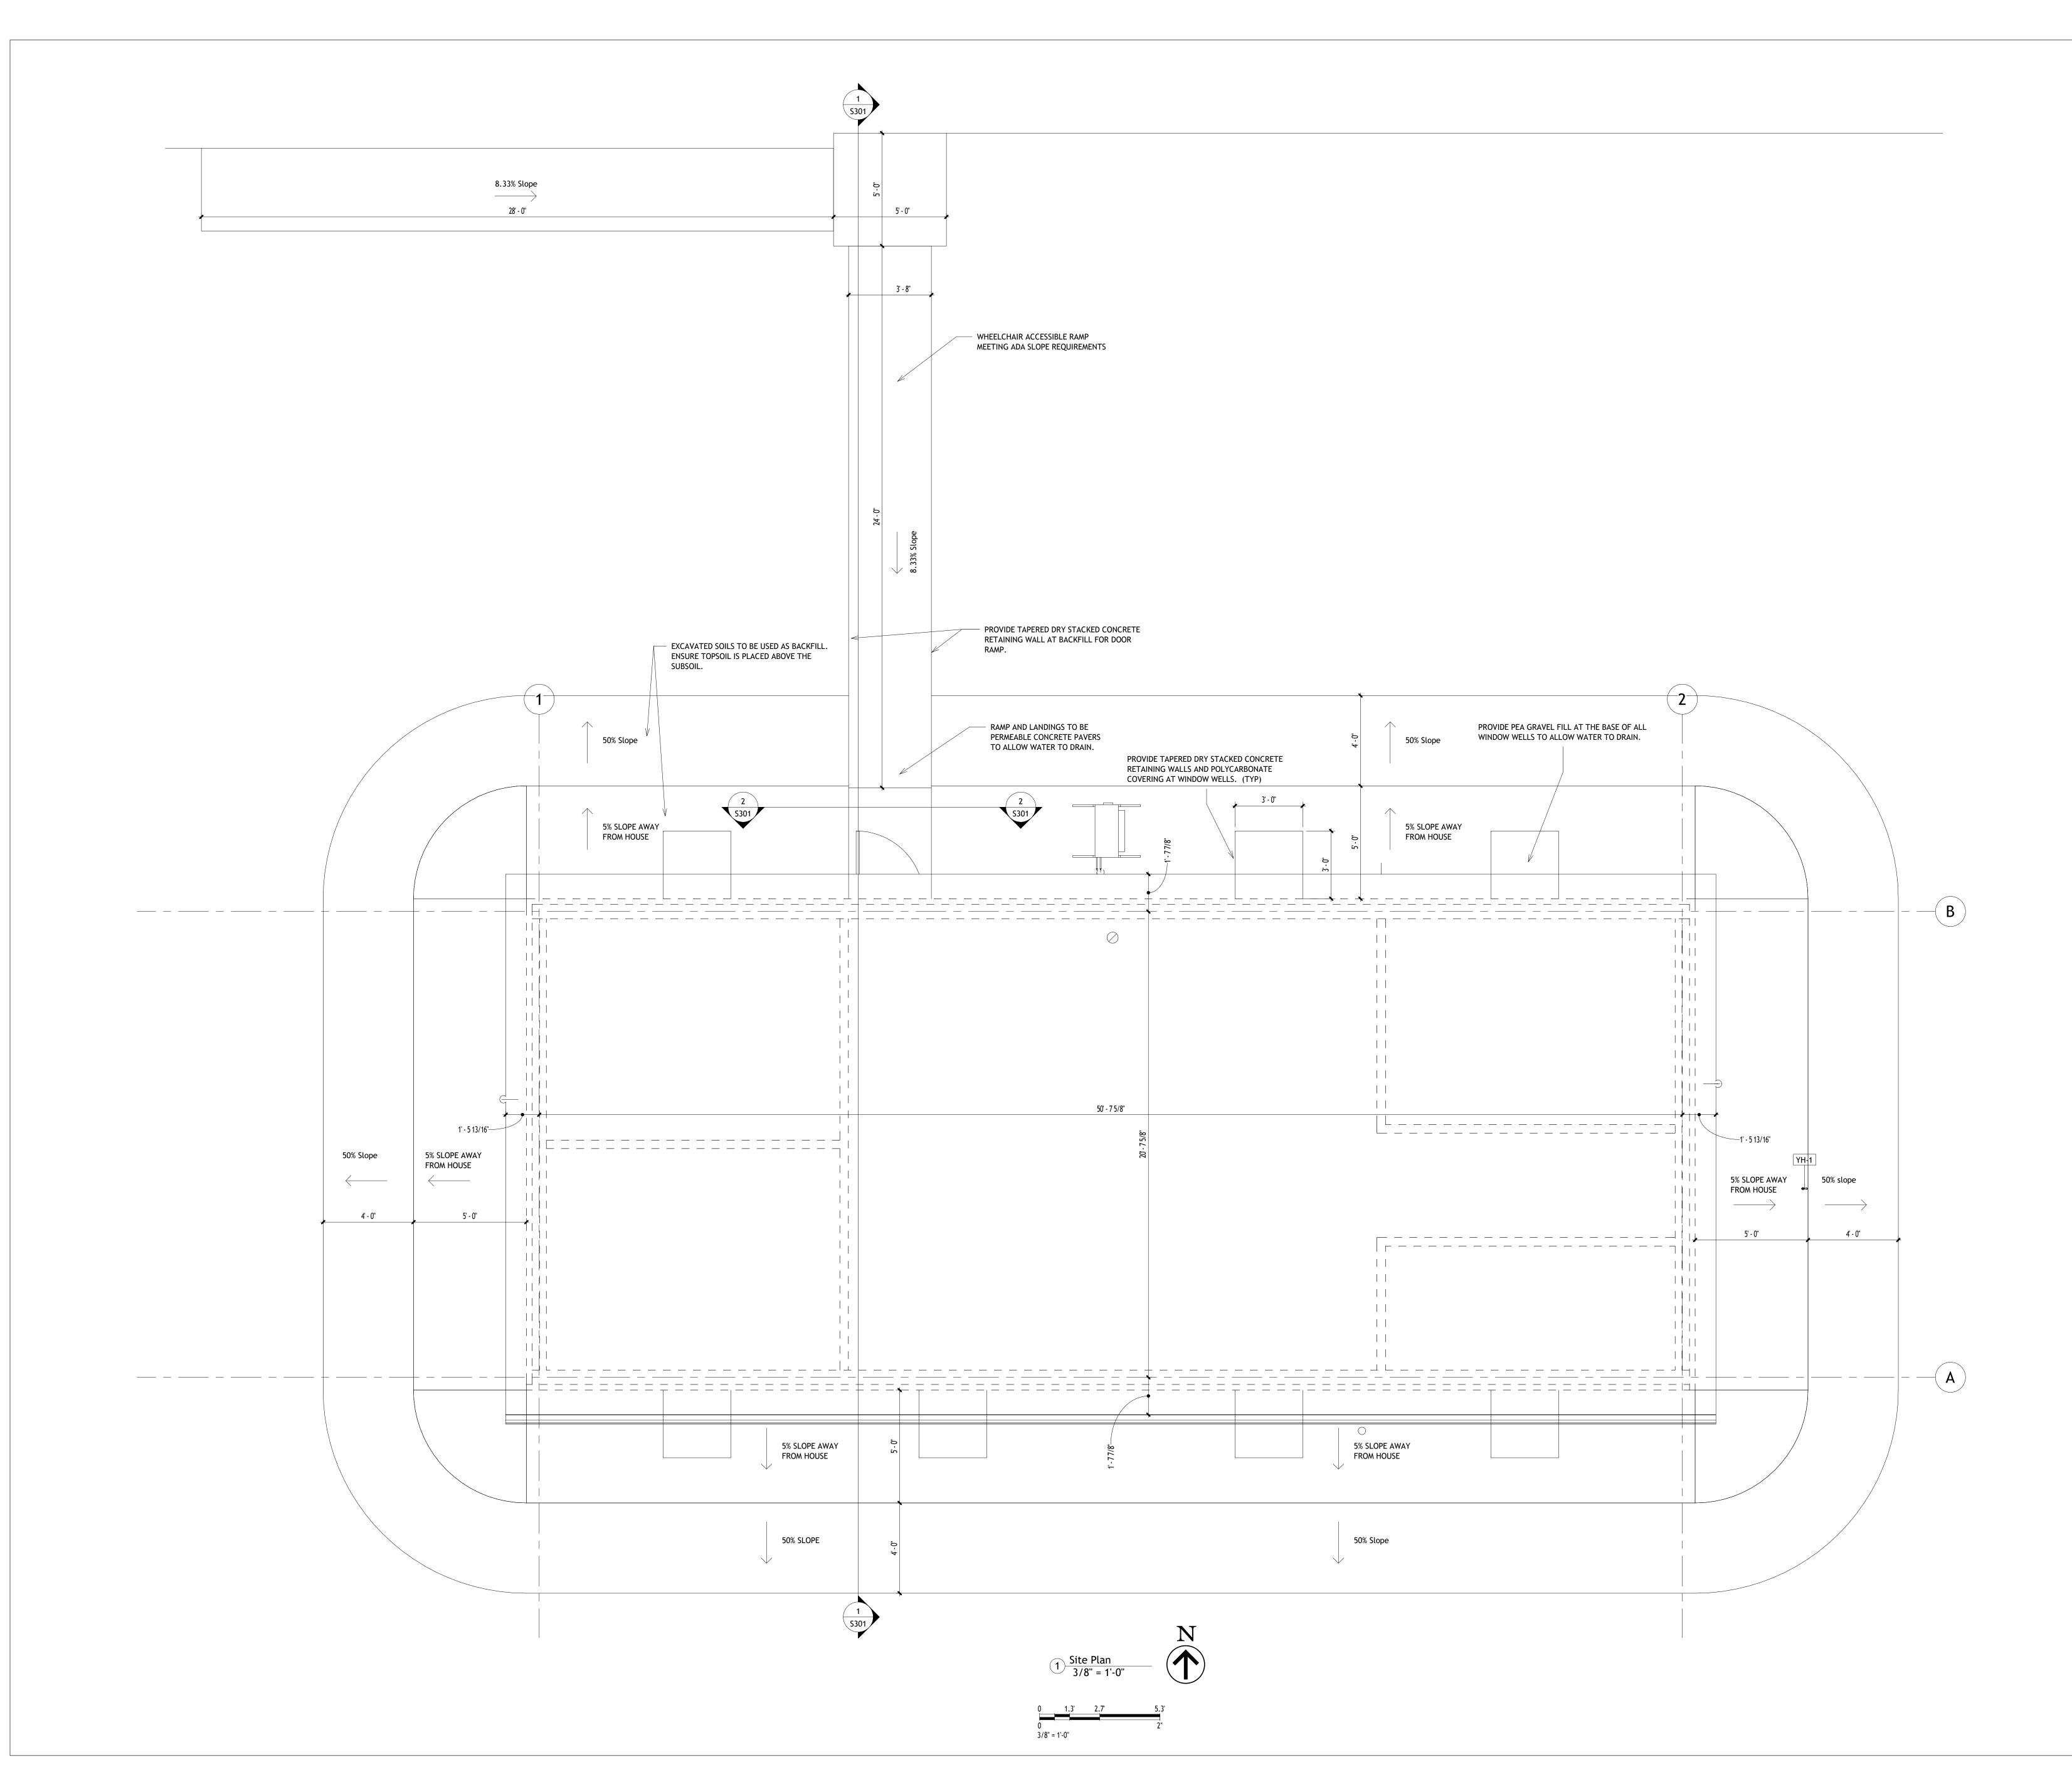



Consultant Address Address Address Phone		
Consultant Address Address Address Phone		

No.	Description	Date


Client Name

Project Name

Site Plan

_
Checker
Author
Issue Date
Project Number

3/8" = 1'-0"

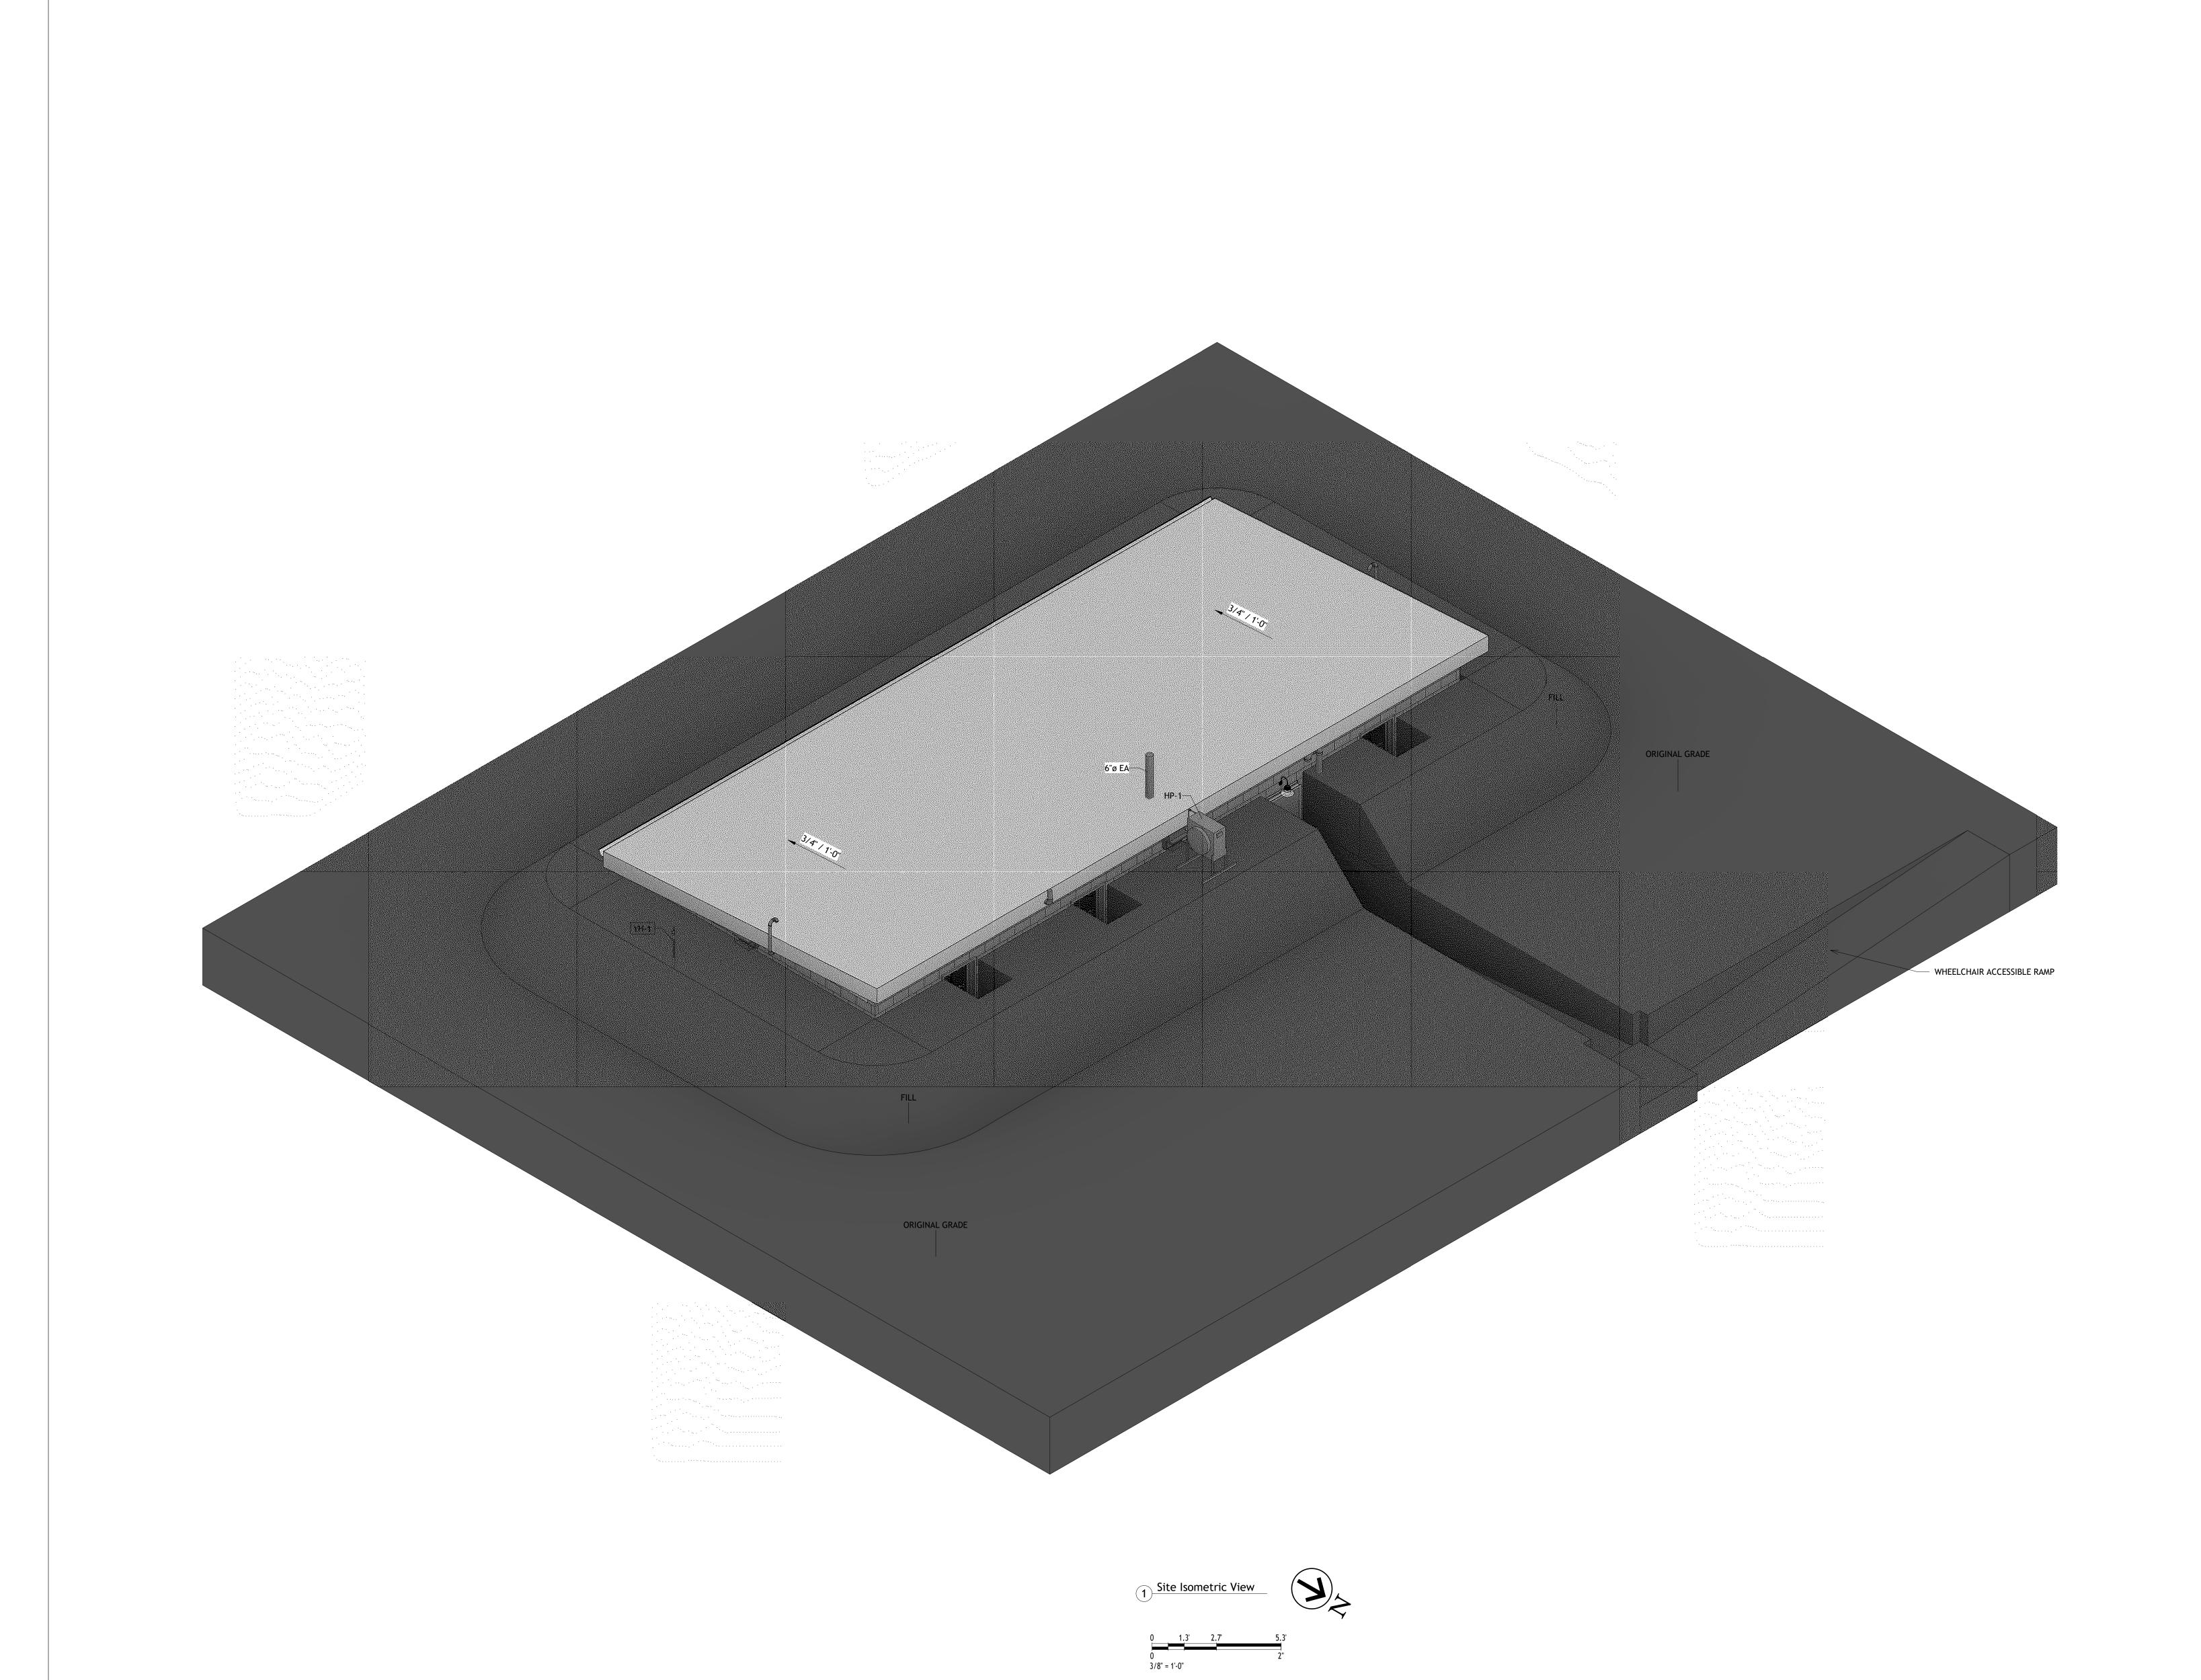



-			
	Consultant		
	Address		
	Address		
	Address		
	Phone		
	Consultant		
	Consultant Address		
	Address		
	Address		
	Phone		
	ee		
	Consultant		
	Address		
	Address		
	Address		
	Phone		
	Consultant		
	Address		
	Address		
	Address		
	Phone		
	Consultant		
	Address		
	Address		
	Address		
	Phone		

No.	Description	Date


Client Name

Project Name


Site Isometric

Project Number	Project Number	
Date	Issue Date	
Drawn By	Author	
Checked By	Checker	

C901

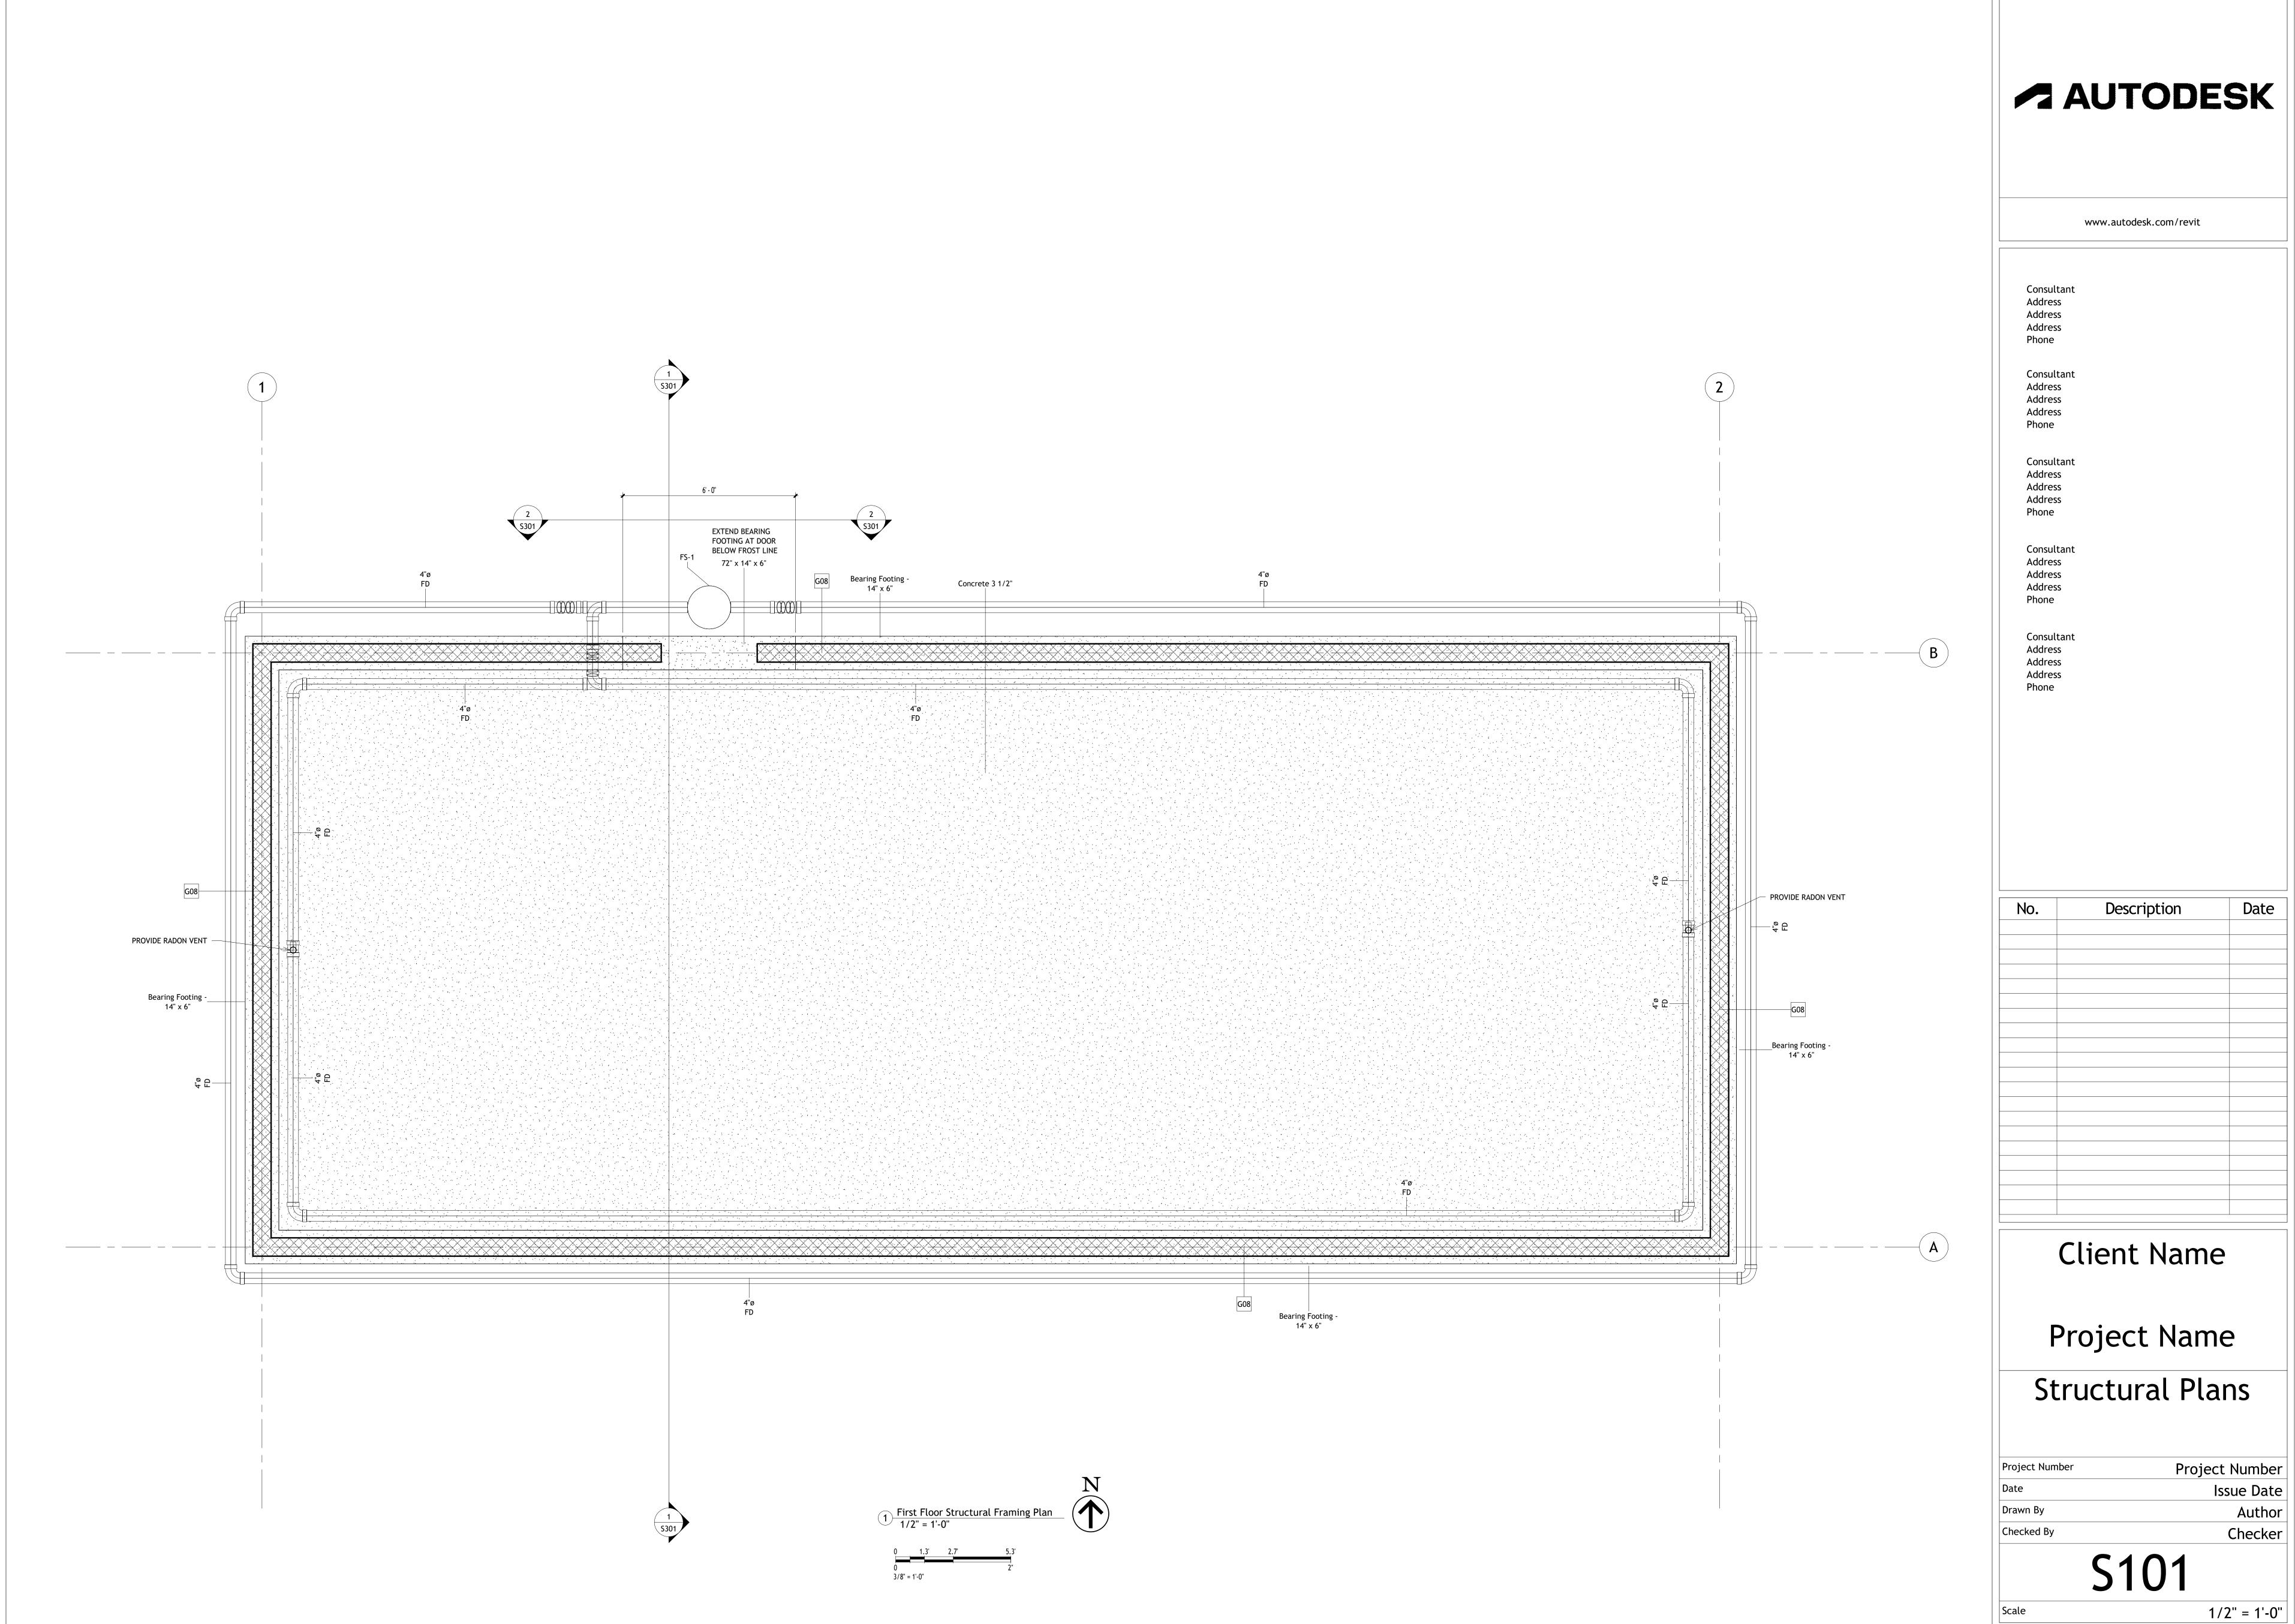



Project Number Issue Date Author Checker

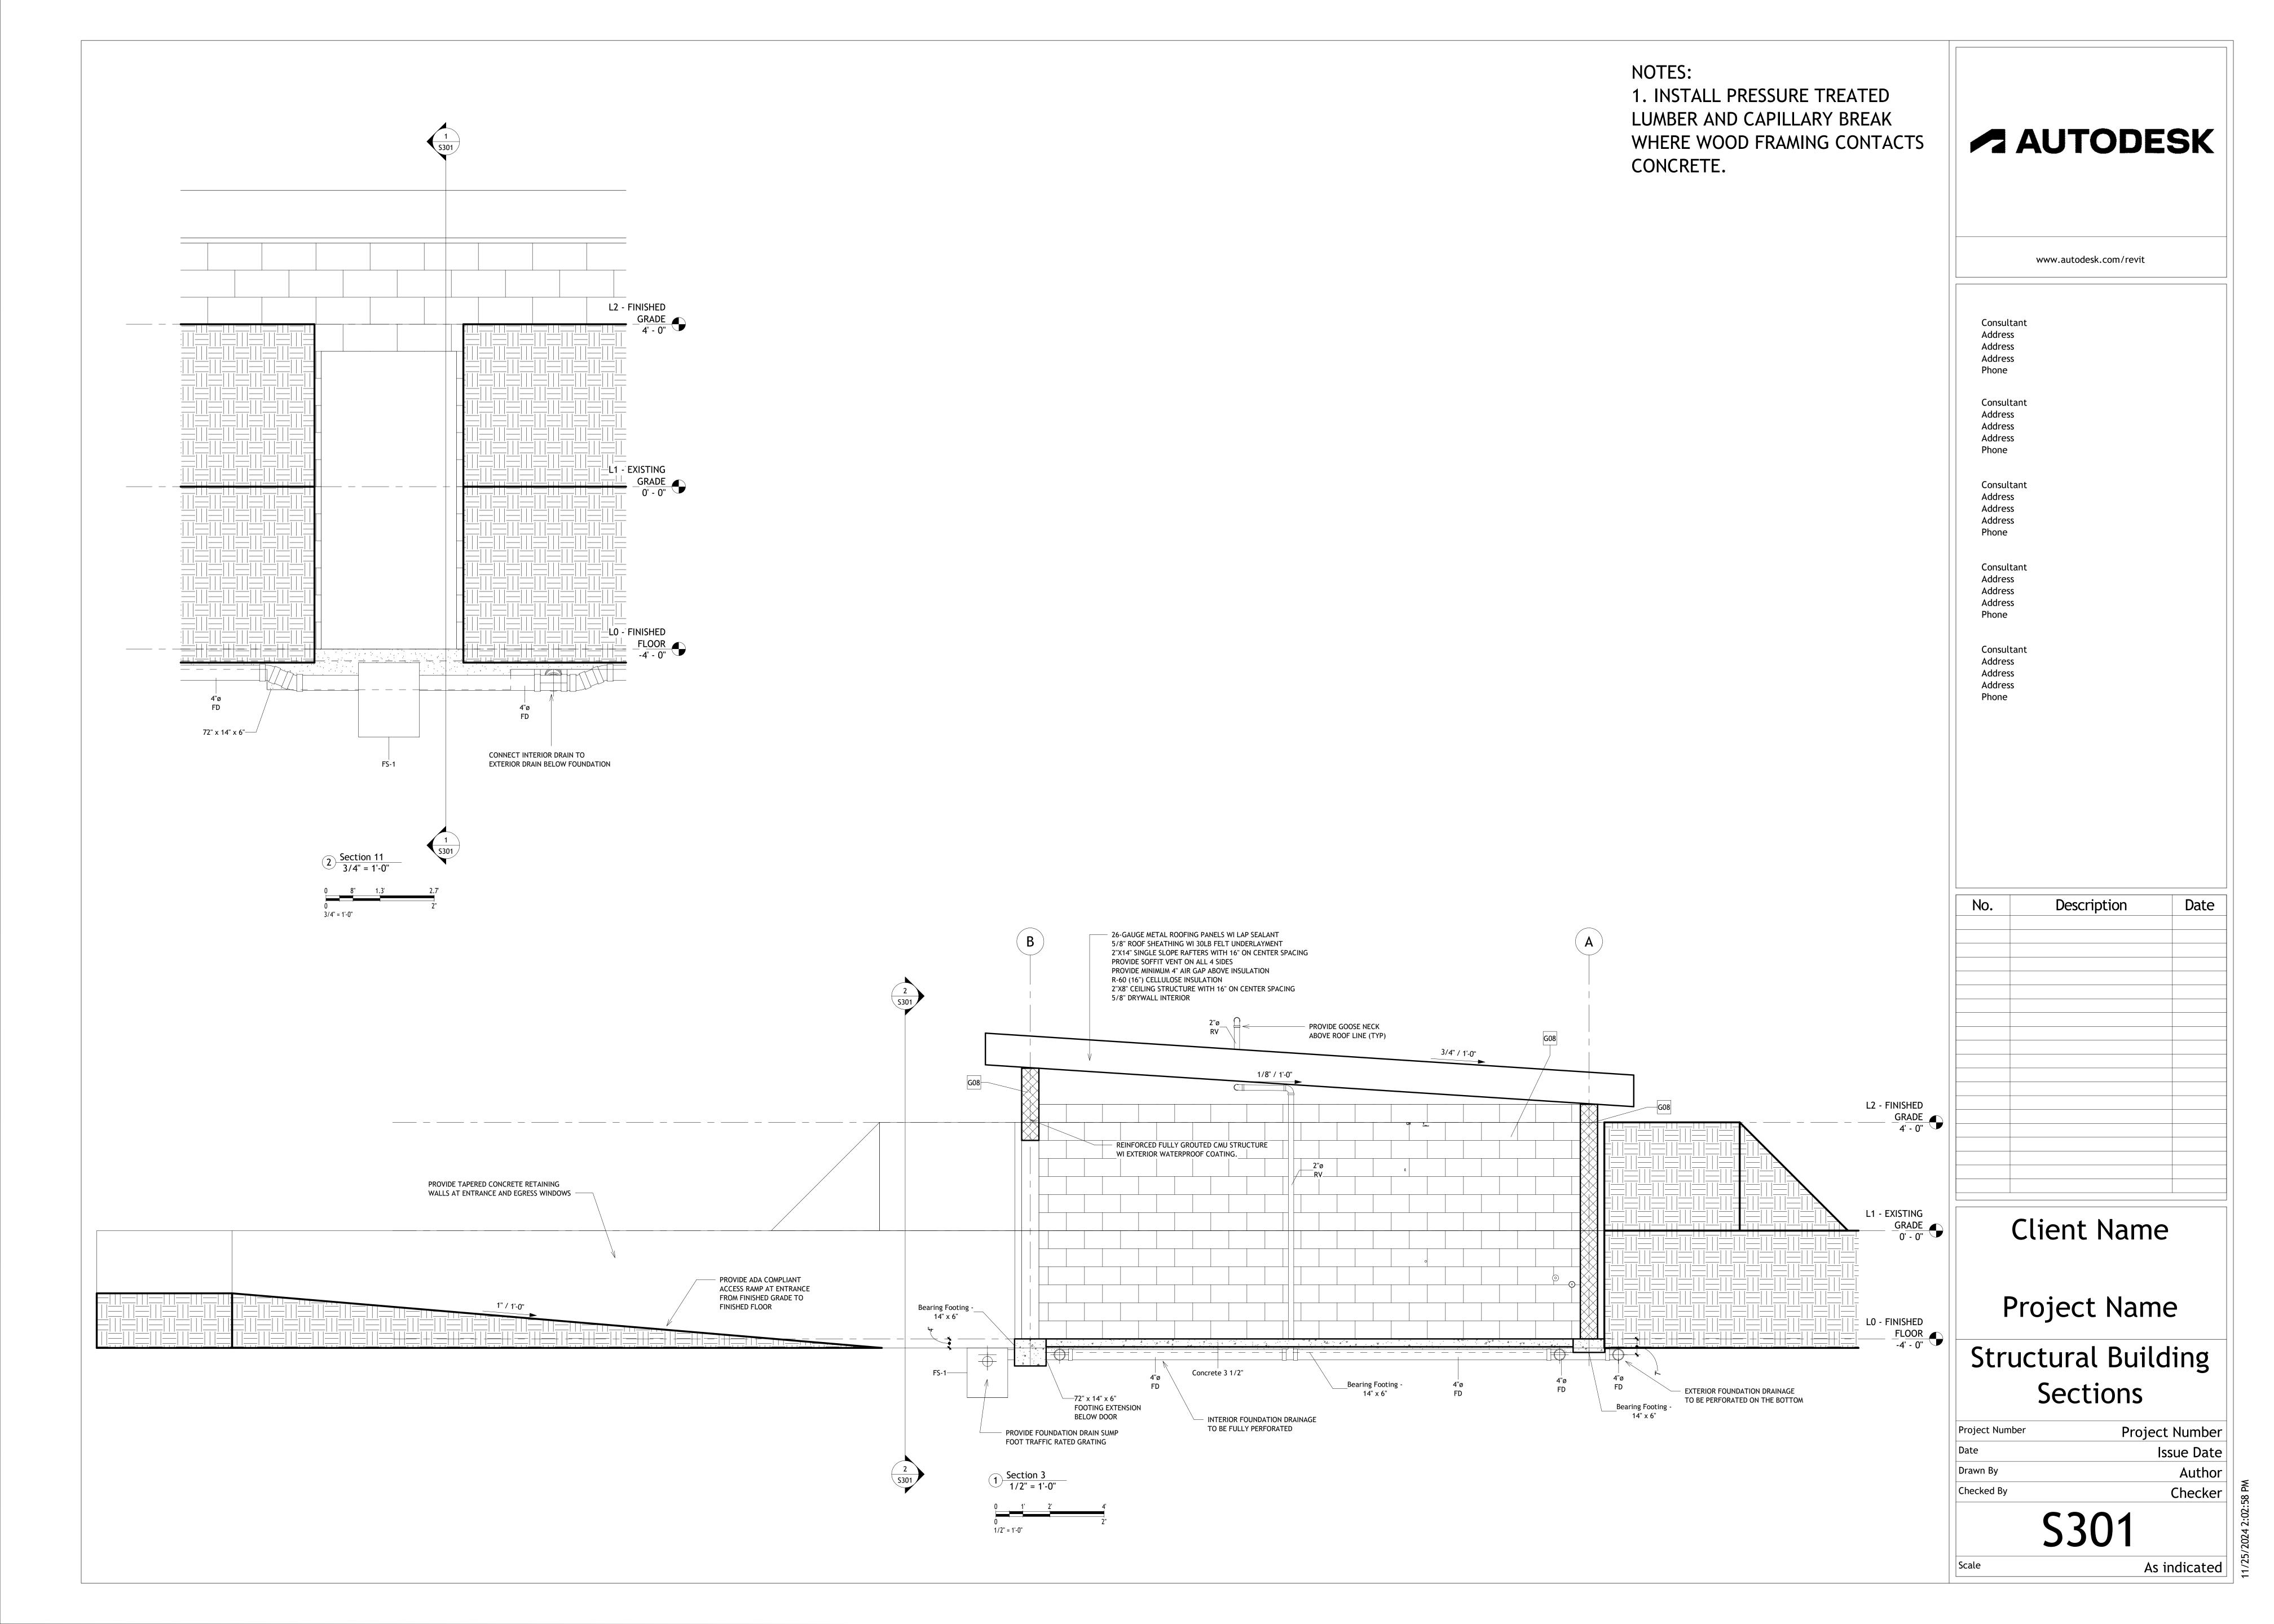


R606.11 Anchorage.

Masonry walls shall be anchored to floor and roof systems in accordance with the details shown in Figure R606.11(1), R606.11(2) or R606.11(3). Footings shall be permitted to be considered as points of lateral support.

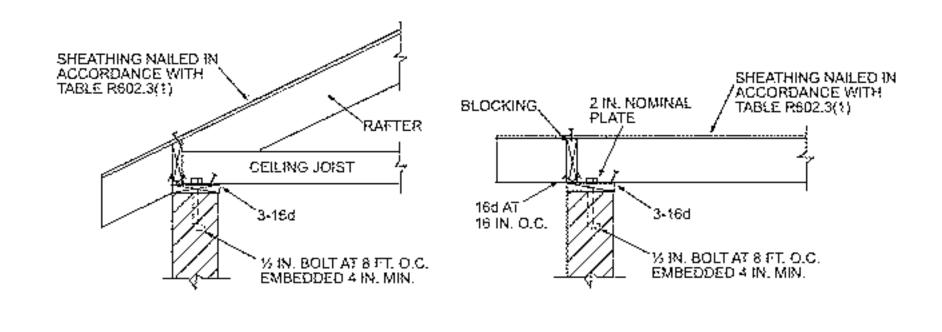

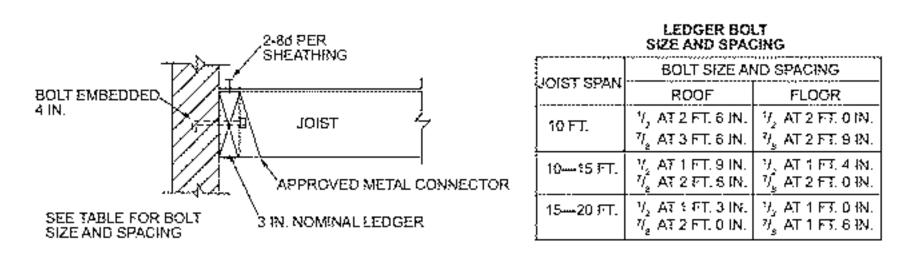

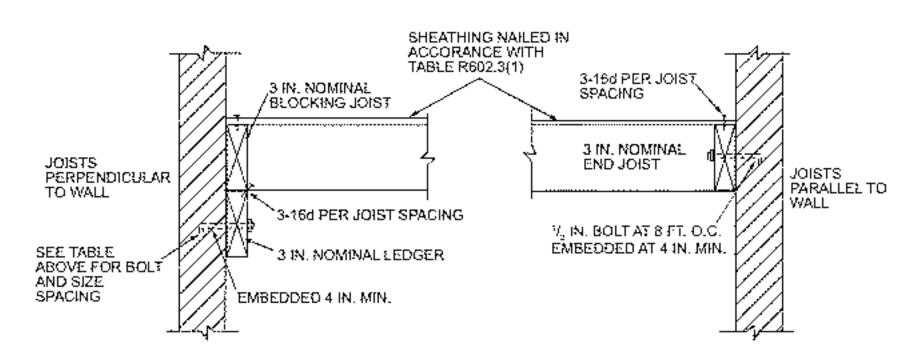


For SI: 1 inch = 25.4 mm, 1 foot = 304.8 mm, 1 pound per square foot = 0.0479 kPa.

Note: Where bolts are located in hollow masonry, the cells in the courses receiving the bolt shall be grouted solid.

FIGURE R606.11(1)

ANCHORAGE REQUIREMENTS FOR MASONRY WALLS LOCATED IN SEISMIC DESIGN CATEGORY A, B OR C AND
WHERE WIND LOADS ARE LESS THAN 30 PSF

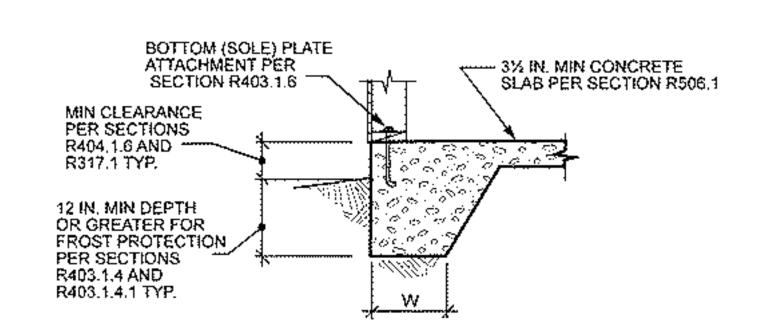

2 Monolithic Slab-on-Ground with Turned-Down Footing
12" = 1'-0"



www.autodesk.com/revit

	Consultant		
	Address		
	Address		
	Address		
	Phone		
	Consultant		
	Address		
	Address		
	Address		
	Phone		
	Consultant		
	Address		
	Address		
	Address		
	Phone		
	Consultant		
	Address		
	Address		
	Address		
	Phone		
	Consultant		
	Address		
	Address		
	Address		
	Phone		
- 1	 The state of the s		

No.	Description	Date

Client Name

Project Name


Strucutral Details

Project Number	Project Number
Date	Issue Date
Drawn By	Author
Checked By	Checker
CI	

S501


Scale

12" = 1'-0"

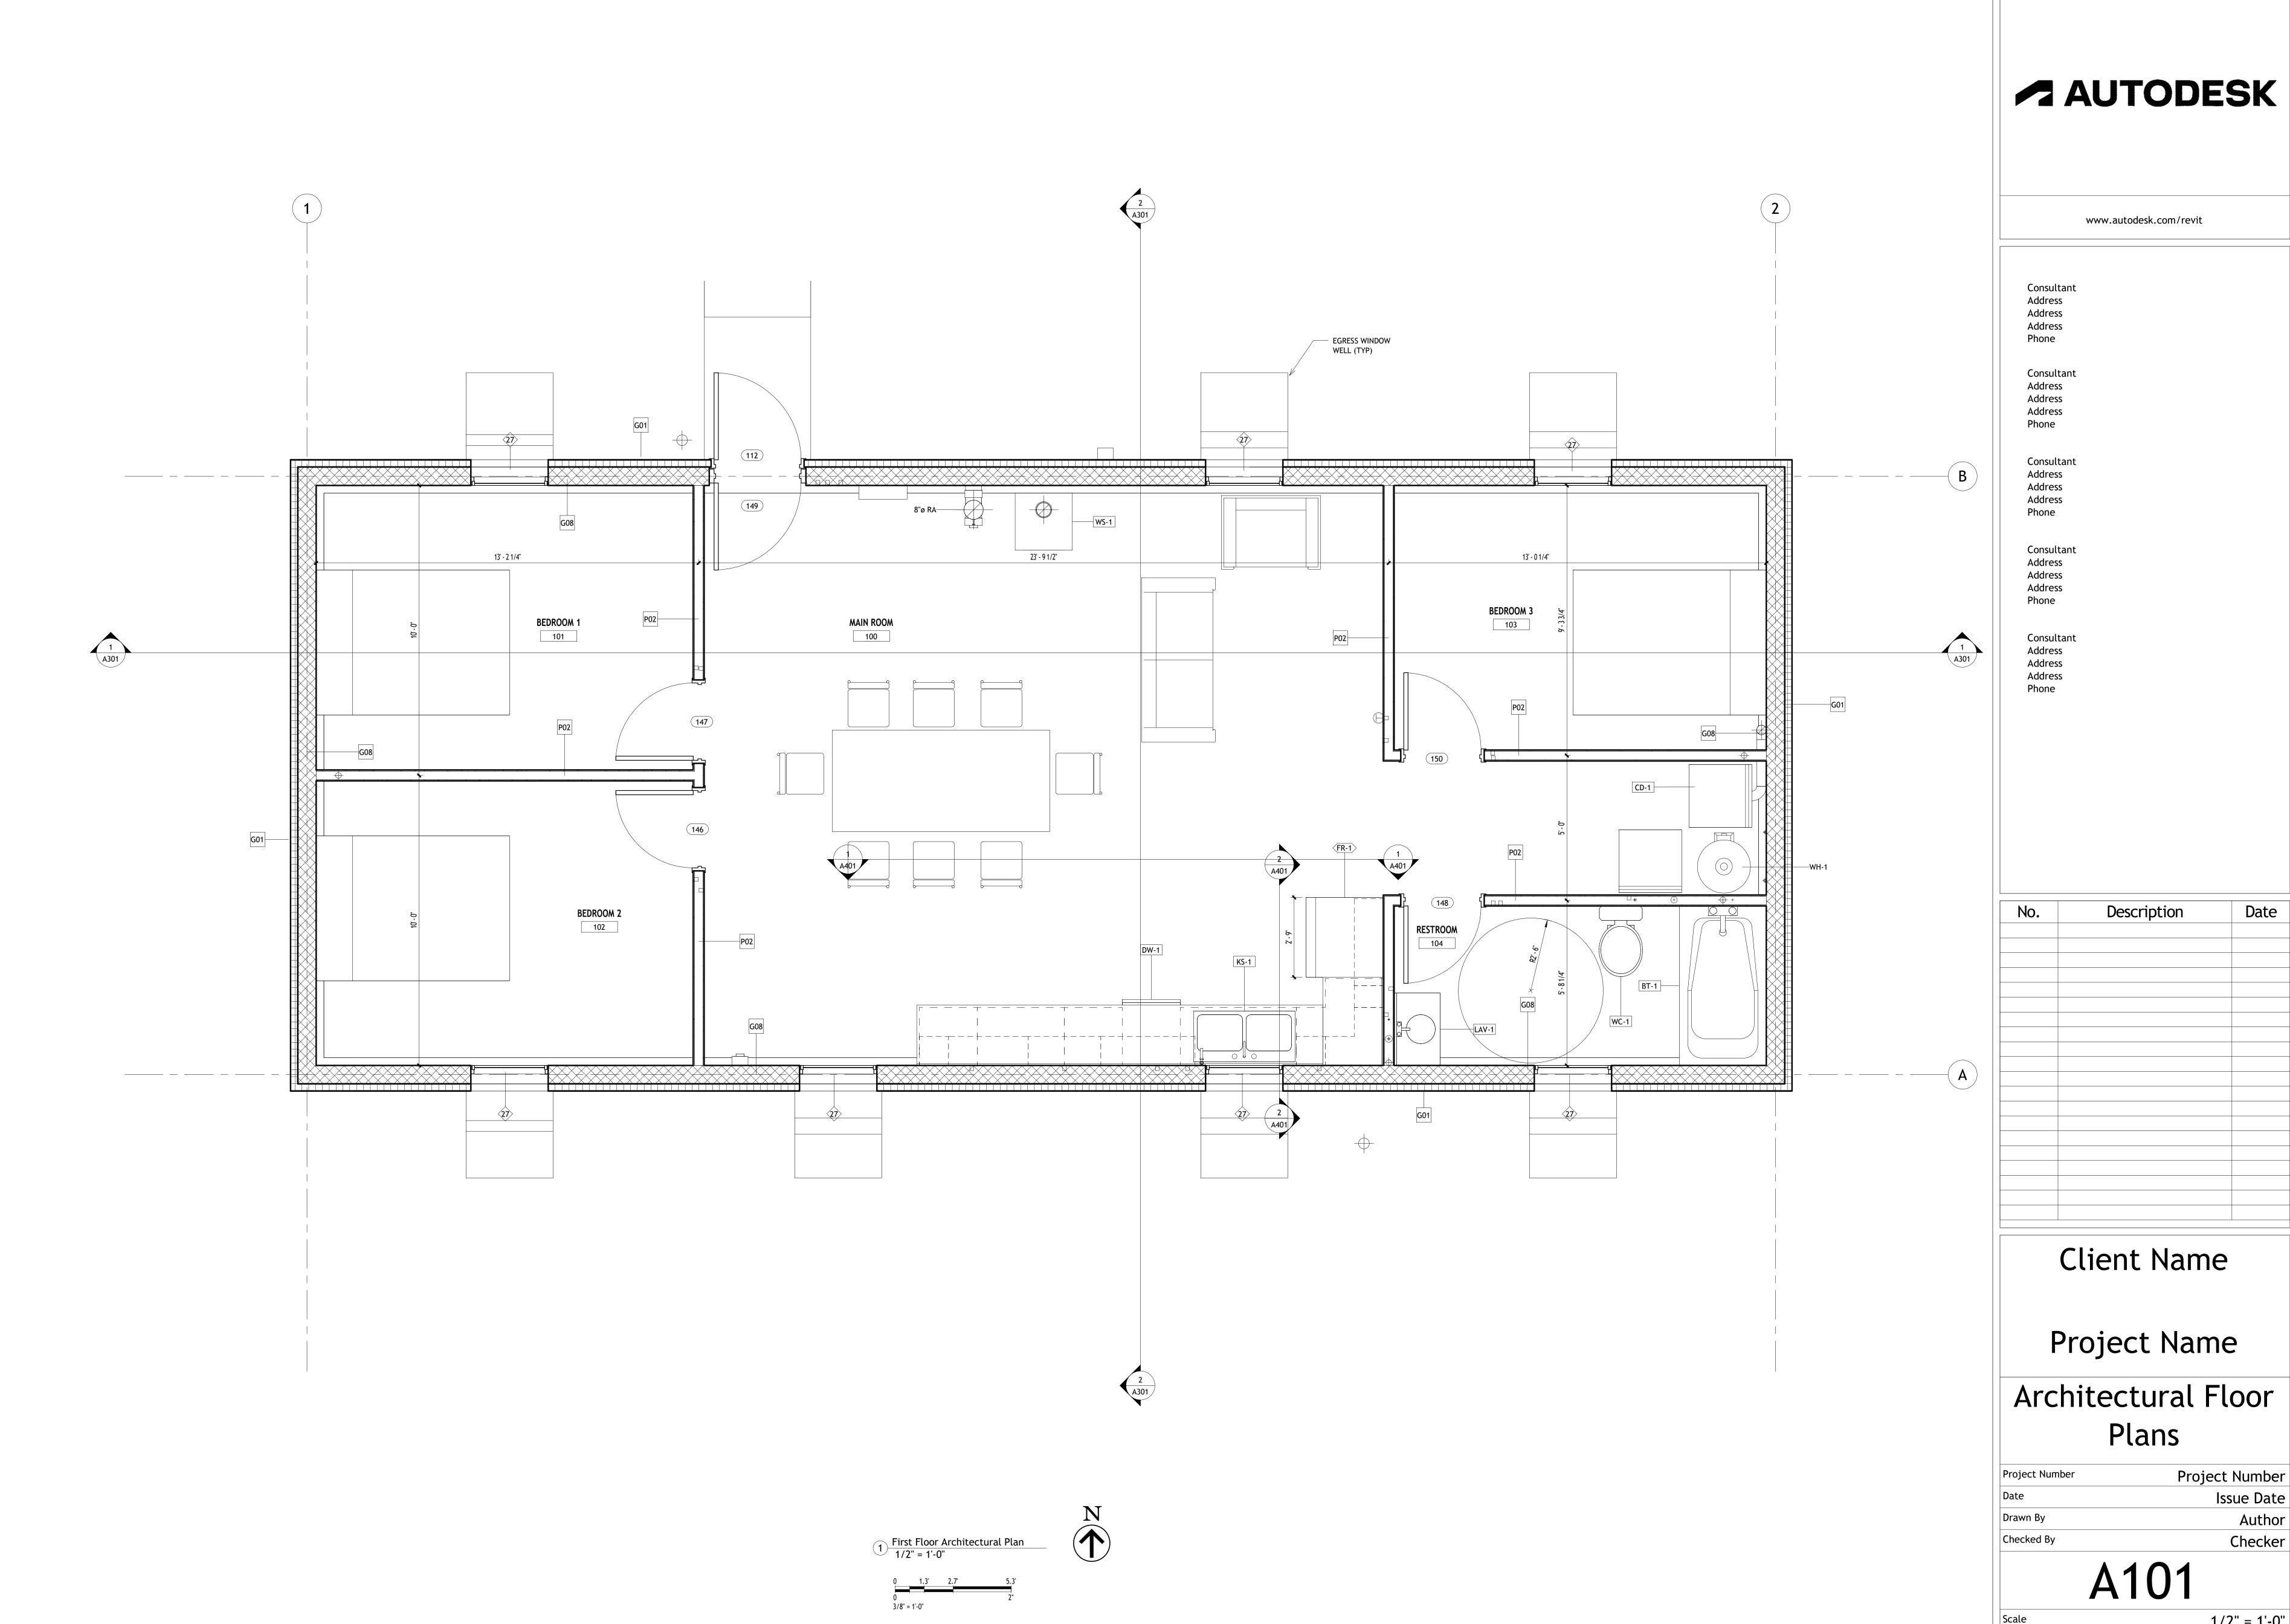

Project Number Issue Date Author Checker

1/2" = 1'-0"

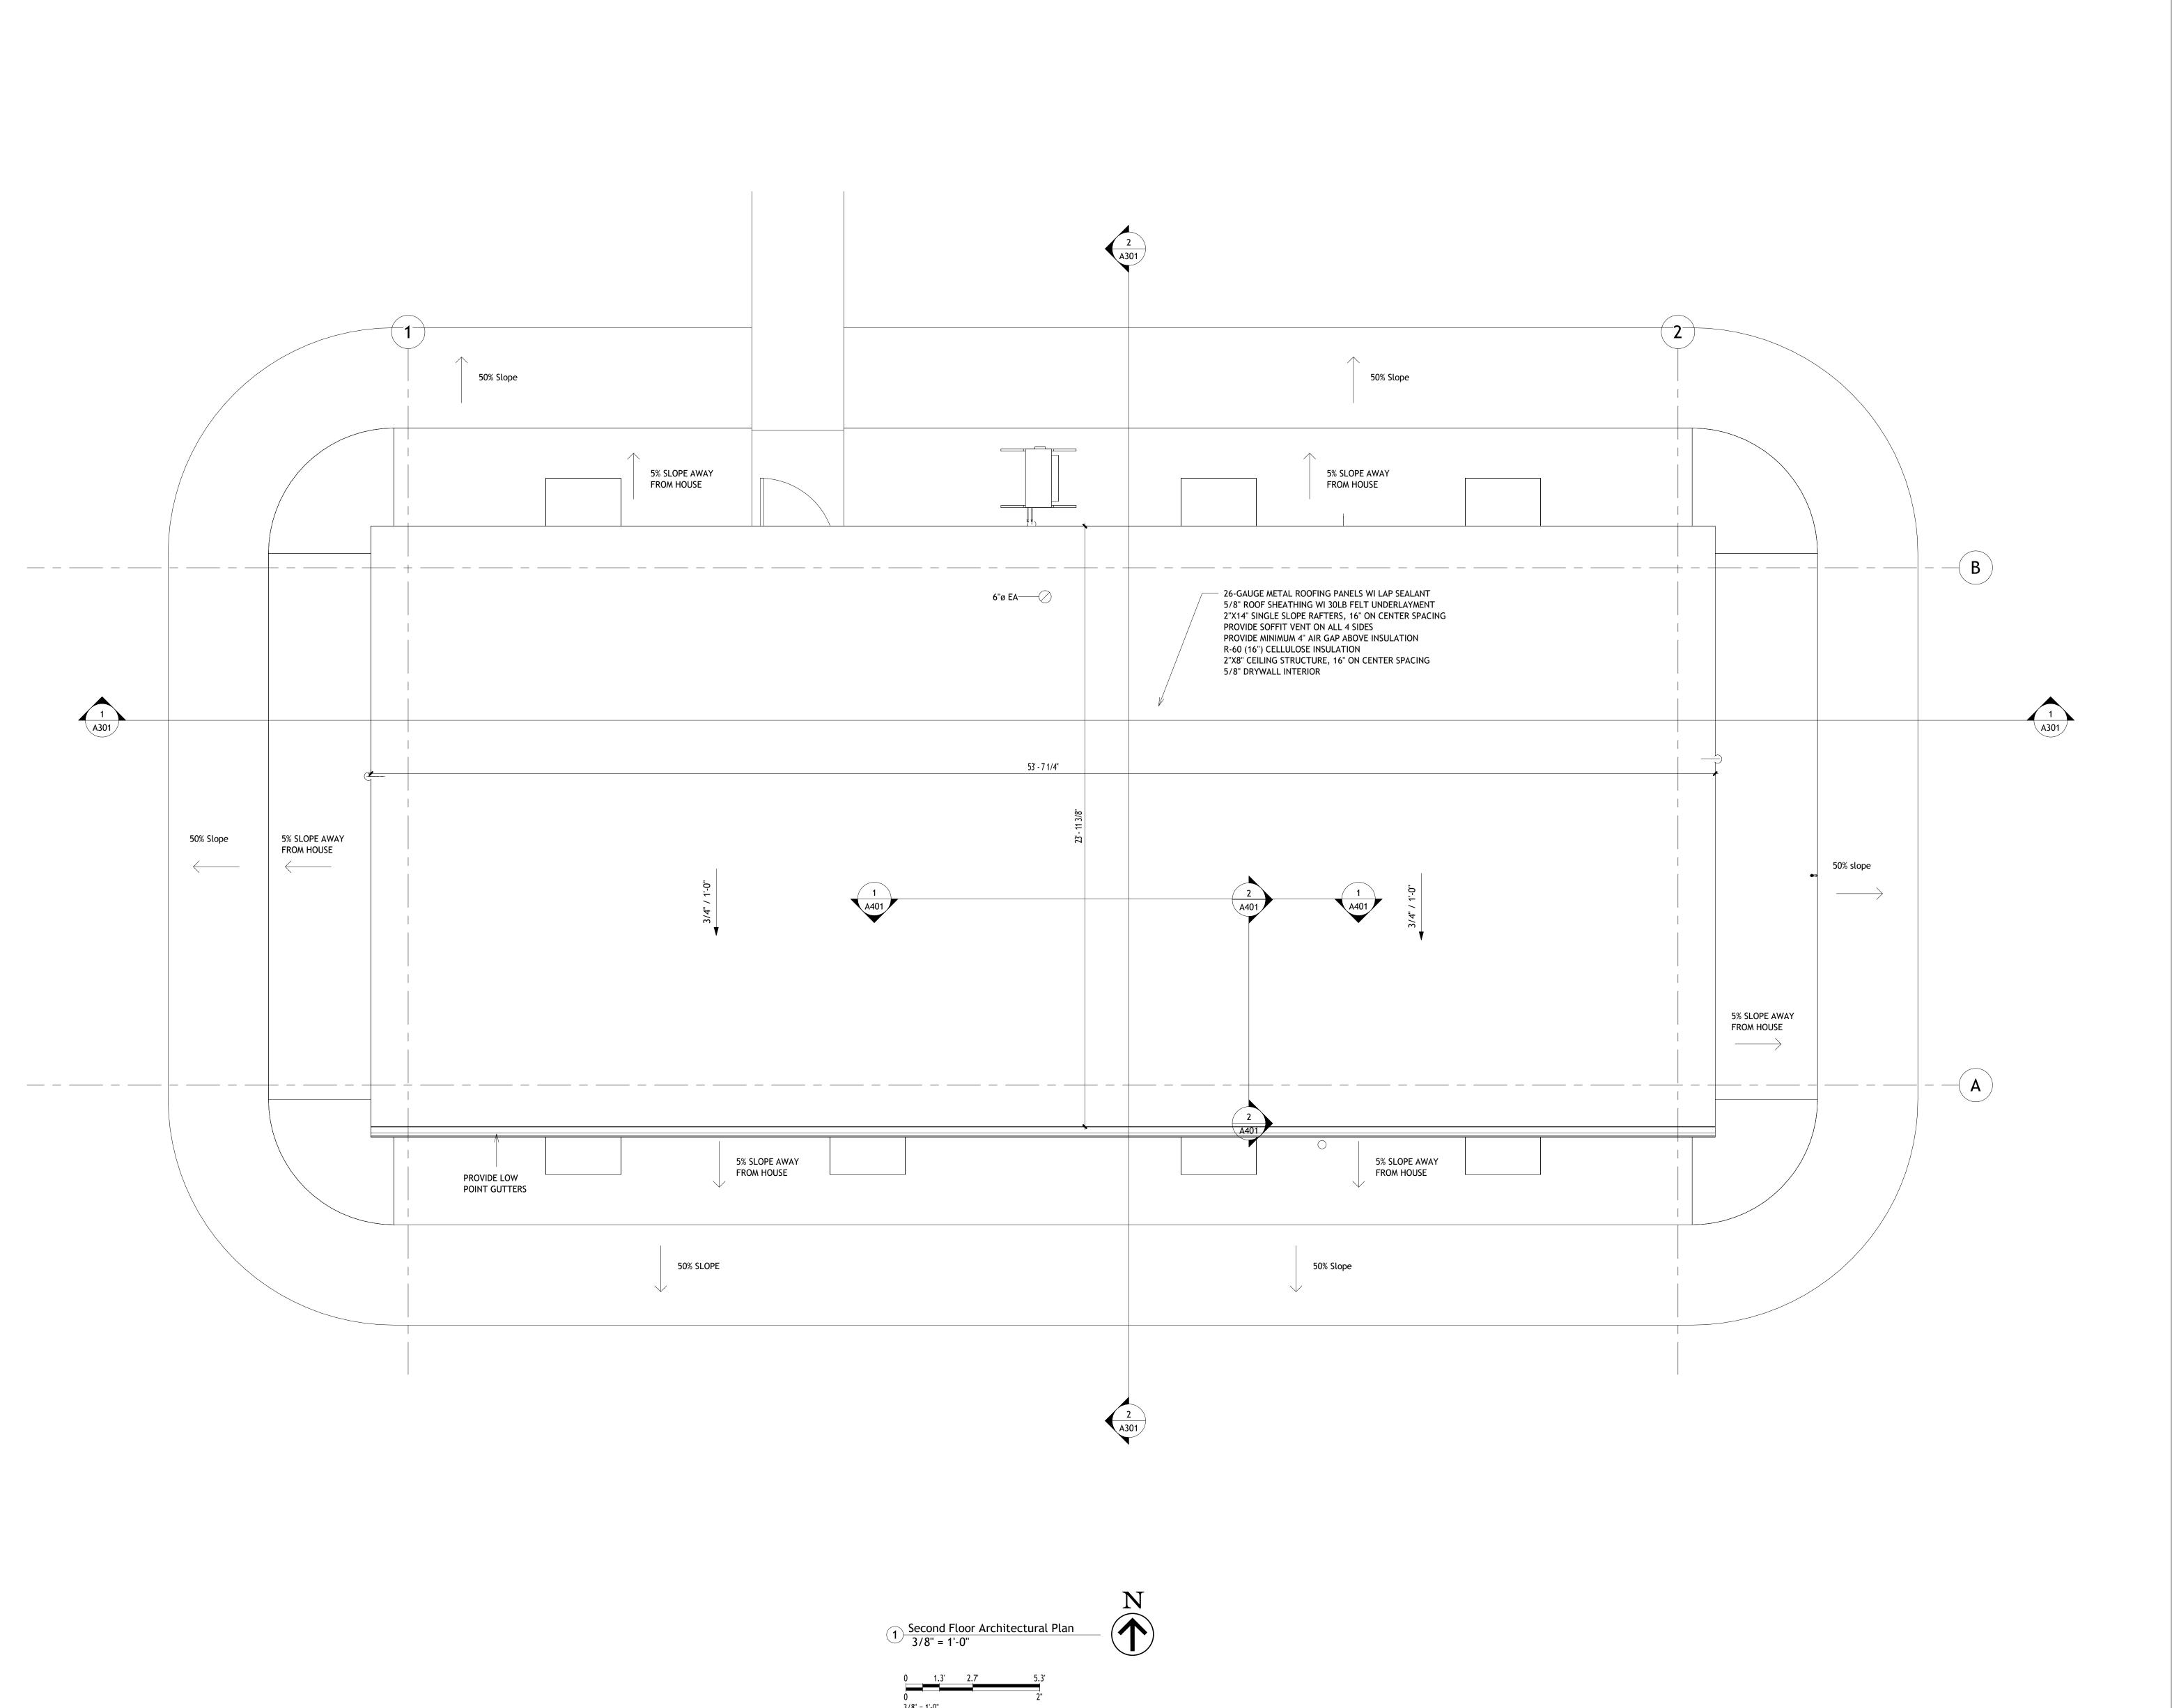



Consultant Address Address Consultant Address Address Phone Consultant Address Address Consultant Address Address Address Phone Address Address Phone

No.	Description	Date

Client Name


Project Name

Architectural Floor Plans

ject Number
Issue Date
Author
Checker

A1023/8" = 1'-0"

11/25/2024 2:02:58 PM

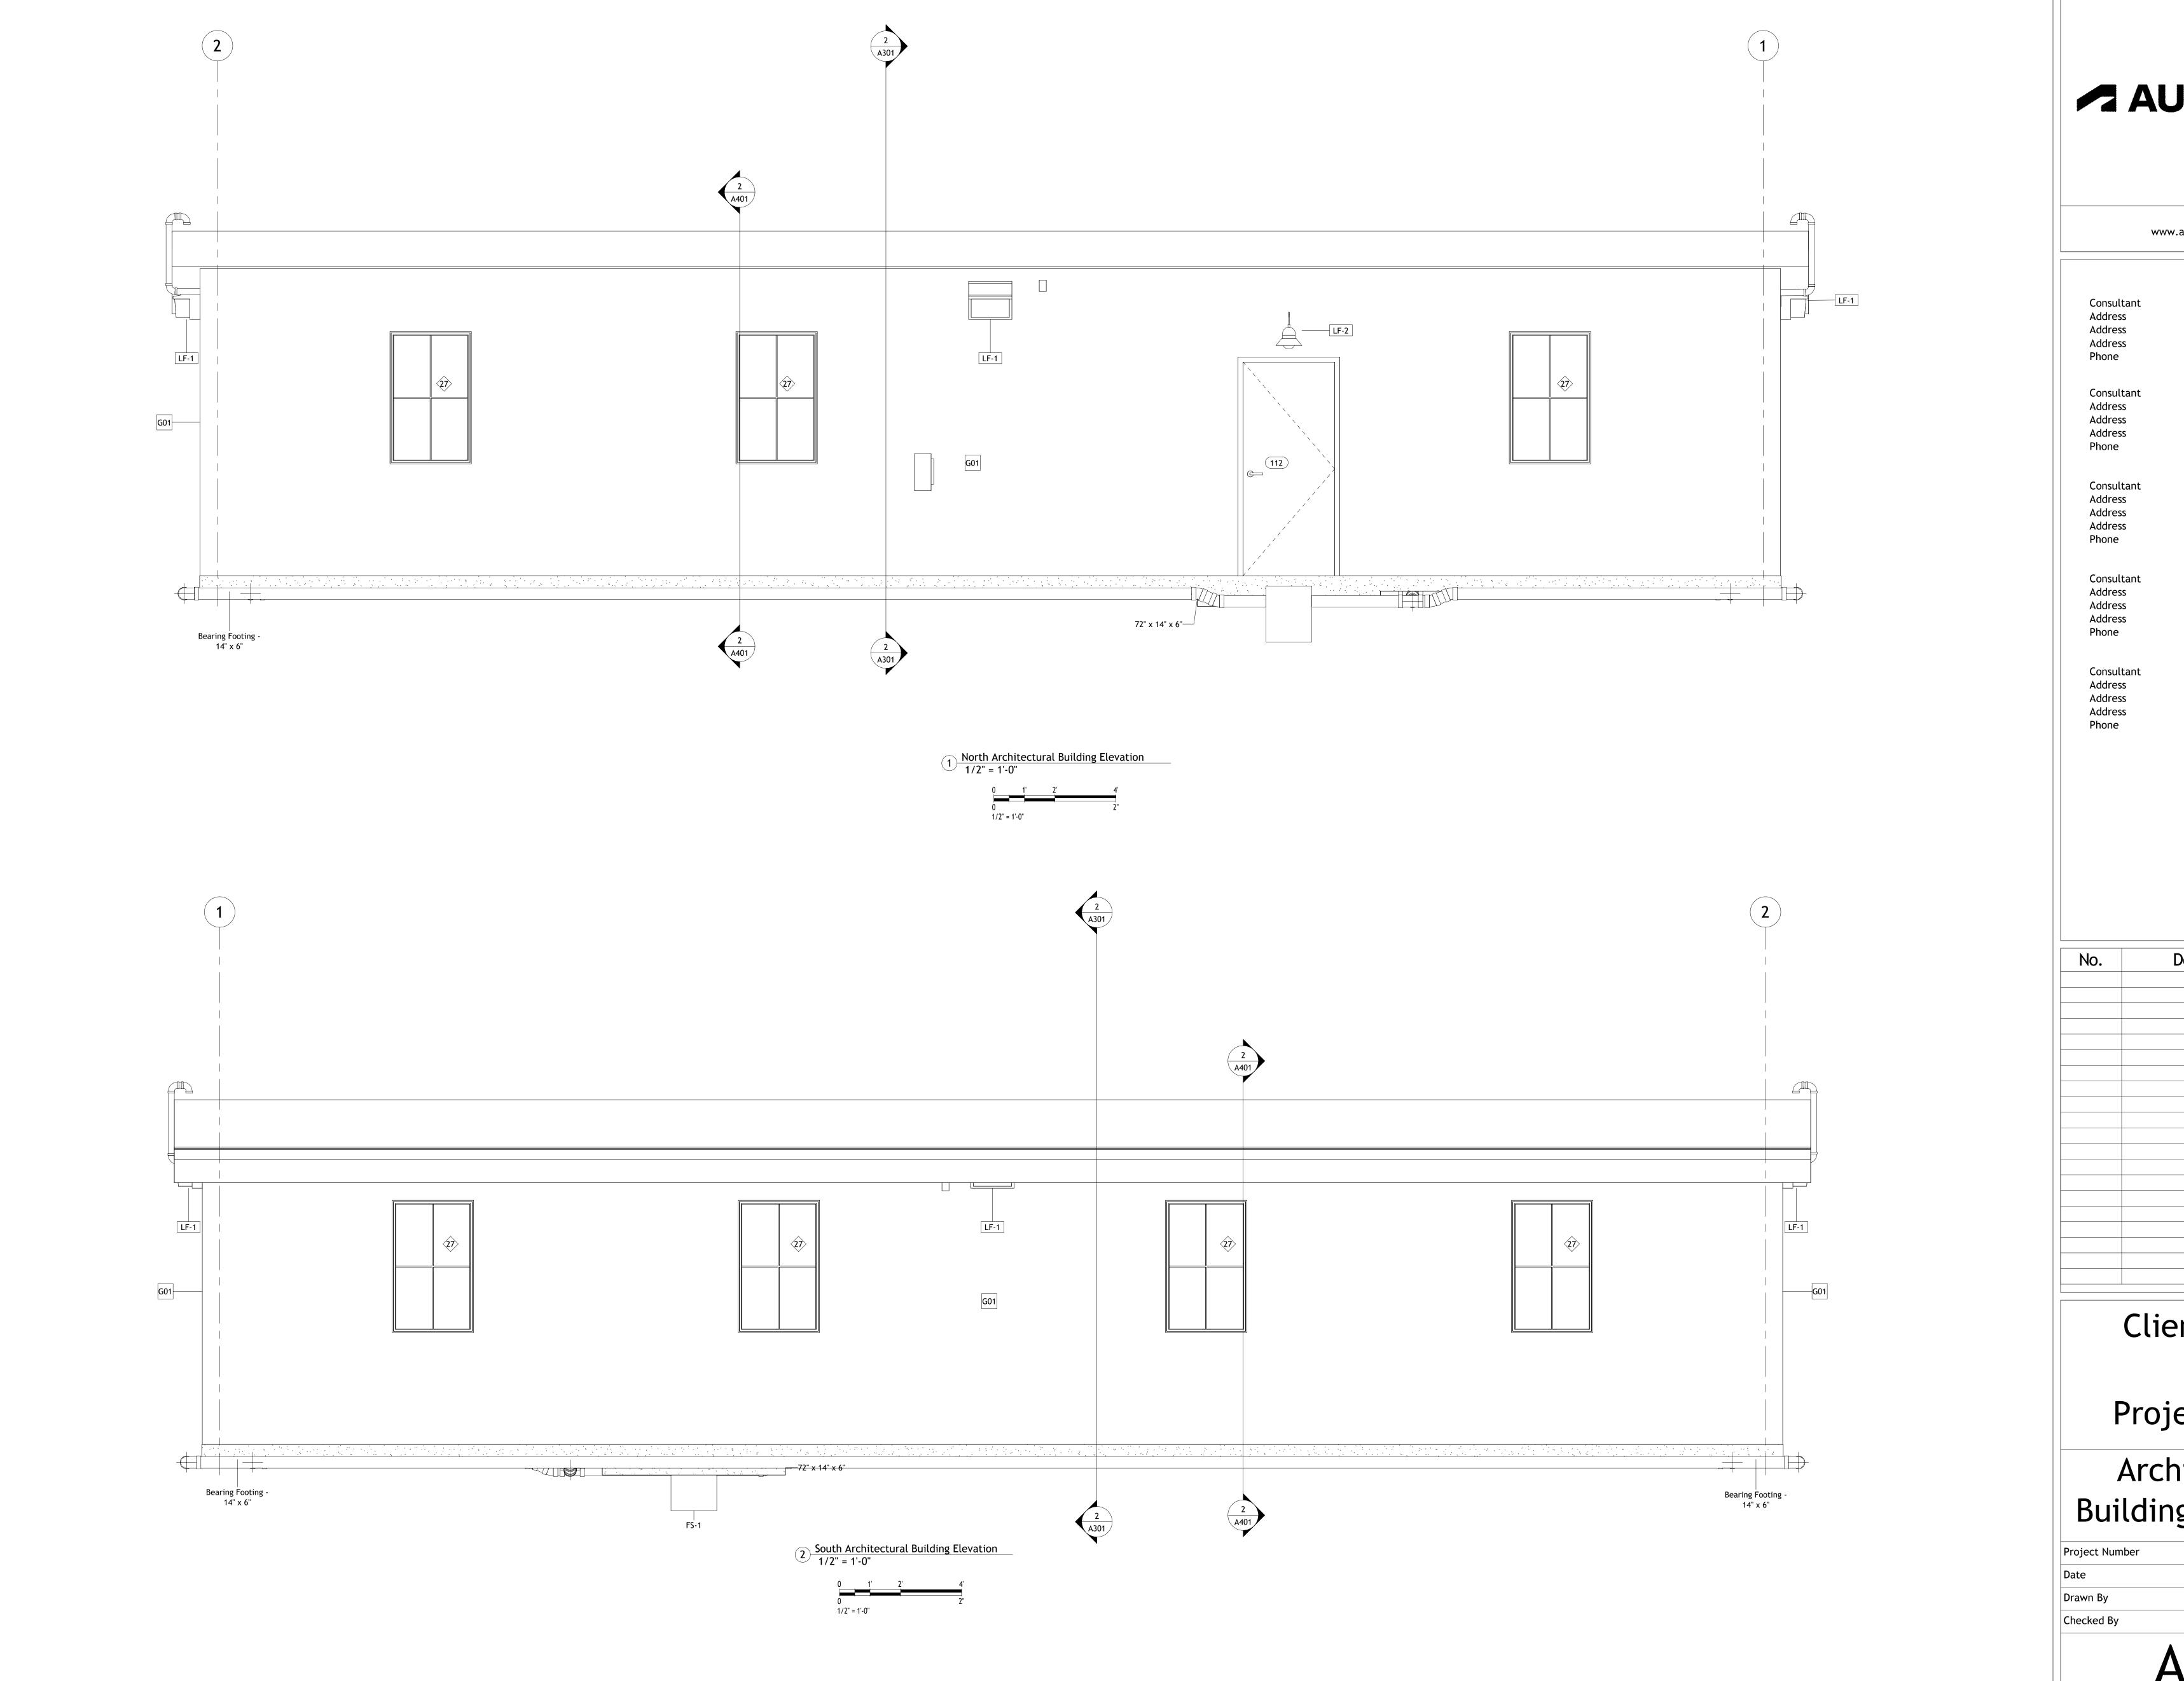



lo. Description Date

Client Name

Project Name

Architectural Building Elevations


Project Number


Date
Drawn By
Checked By

Project Number
Issue Date
Author
Checked By

A201

1/2" = 1'-0"

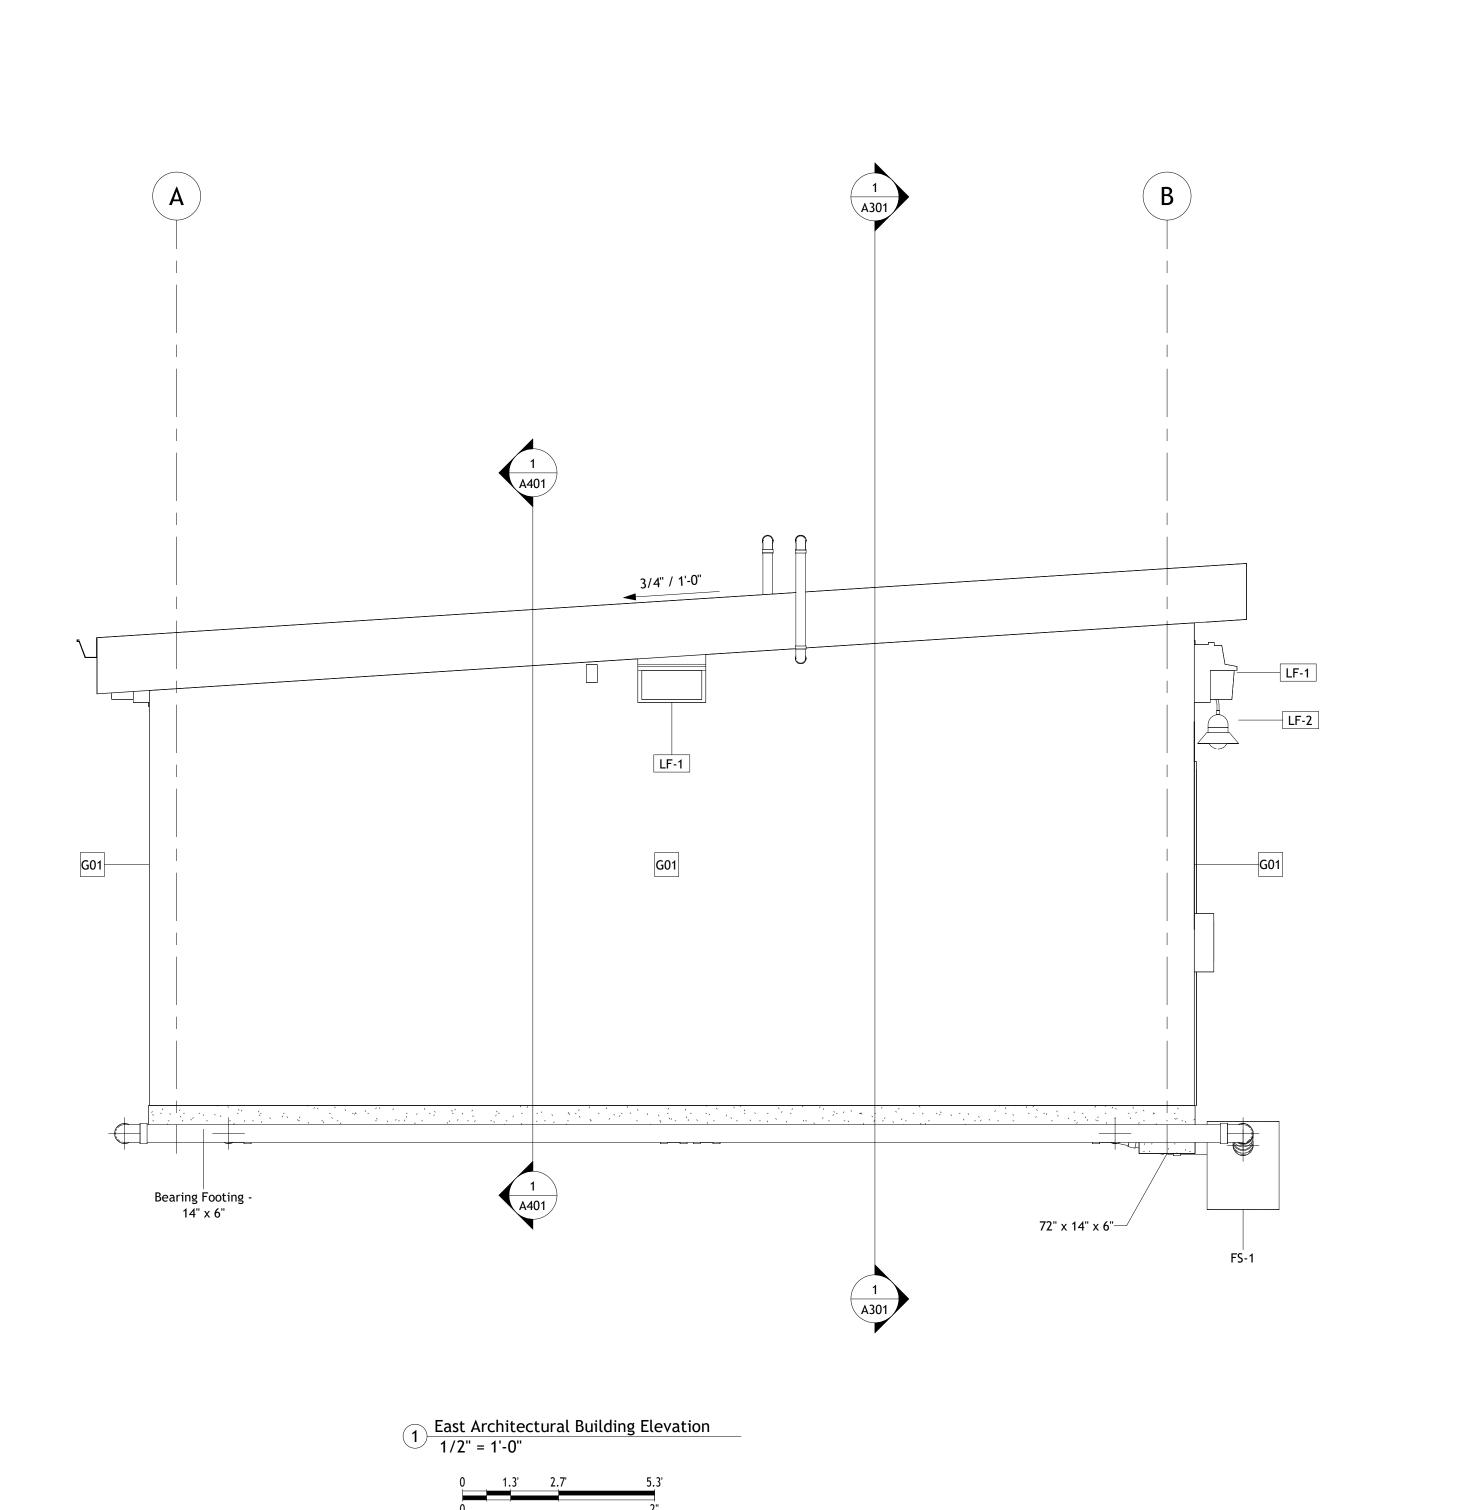

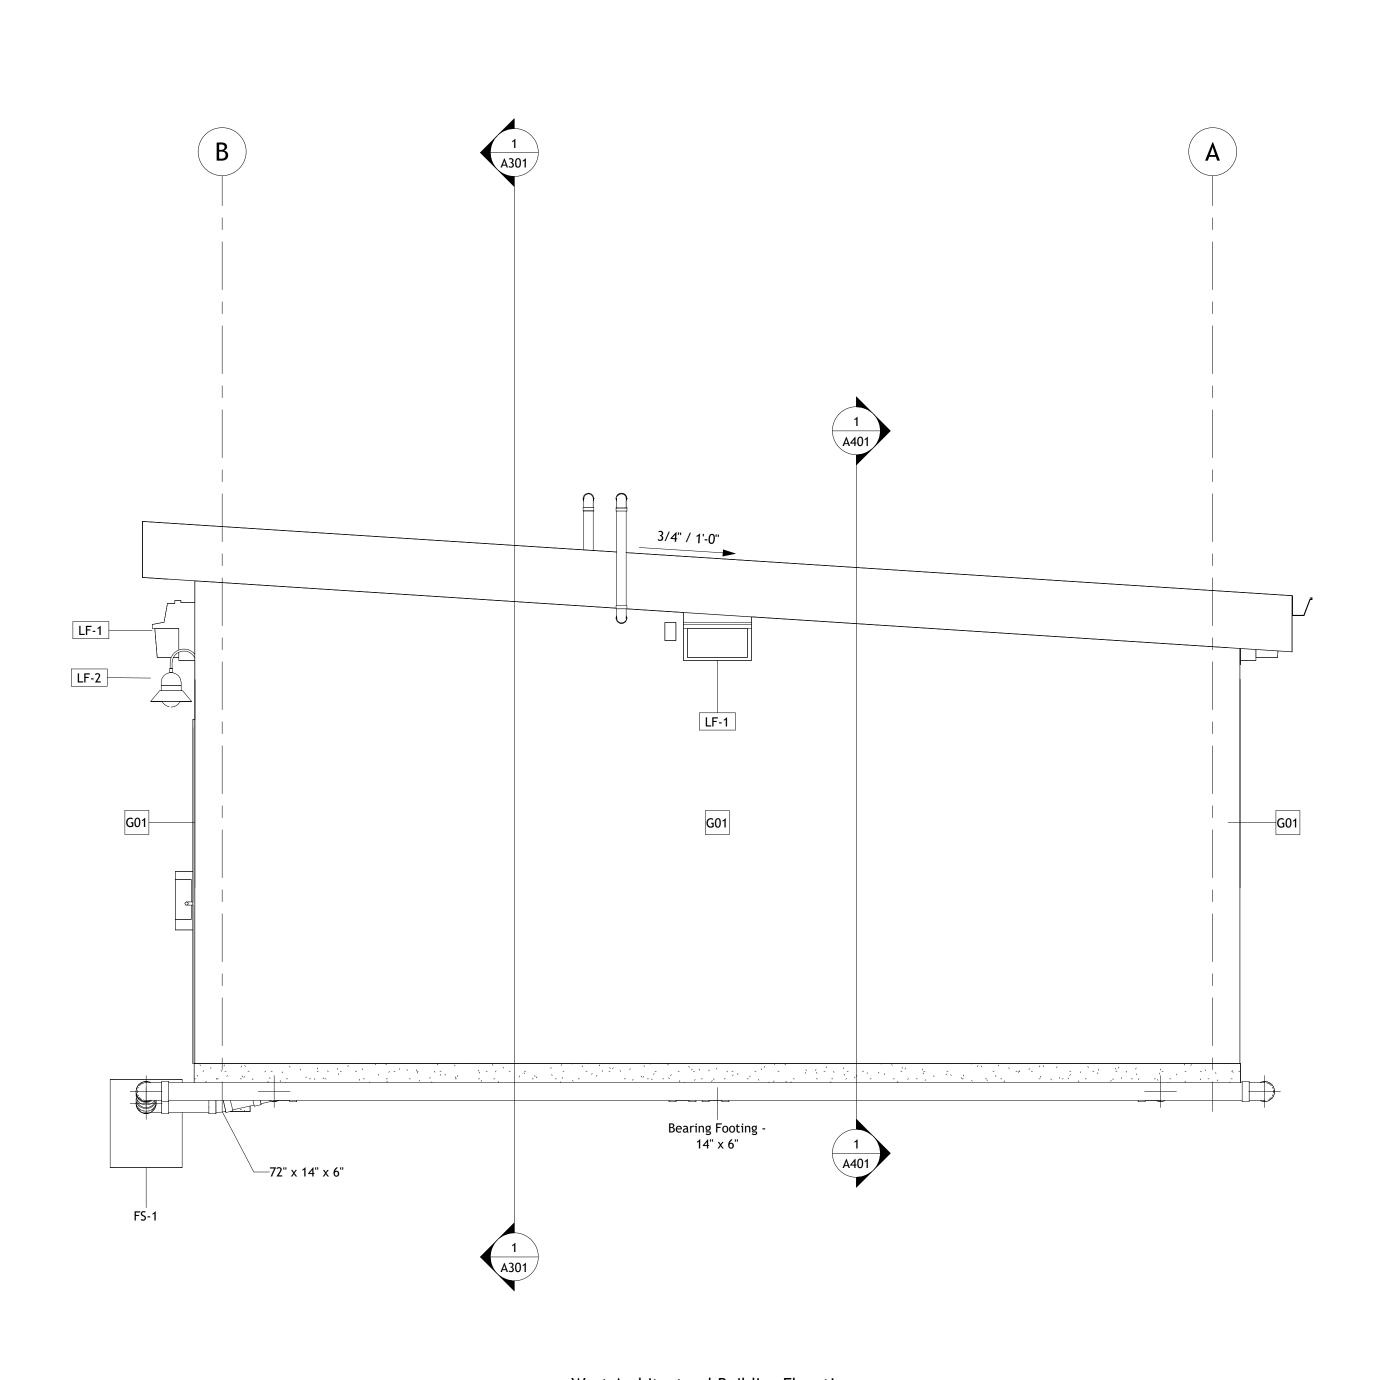



Consu Addre Addre Addre Phone	ess ess ess		
Consu Addre Addre Addre Phone	ess ess		
Consu Addre Addre Addre Phone	ess ess		
Consu Addre Addre Addre Phone	ess ess ess		
Consu Addre Addre Addre Phone	ess ess ess		

No.	Description	Date

Client Name

Project Name


Architectural Building Elevations

Project Number	Project Number
Date	Issue Date
Drawn By	Author
Checked By	Checker

A202

Scale


1/2" = 1'-0"

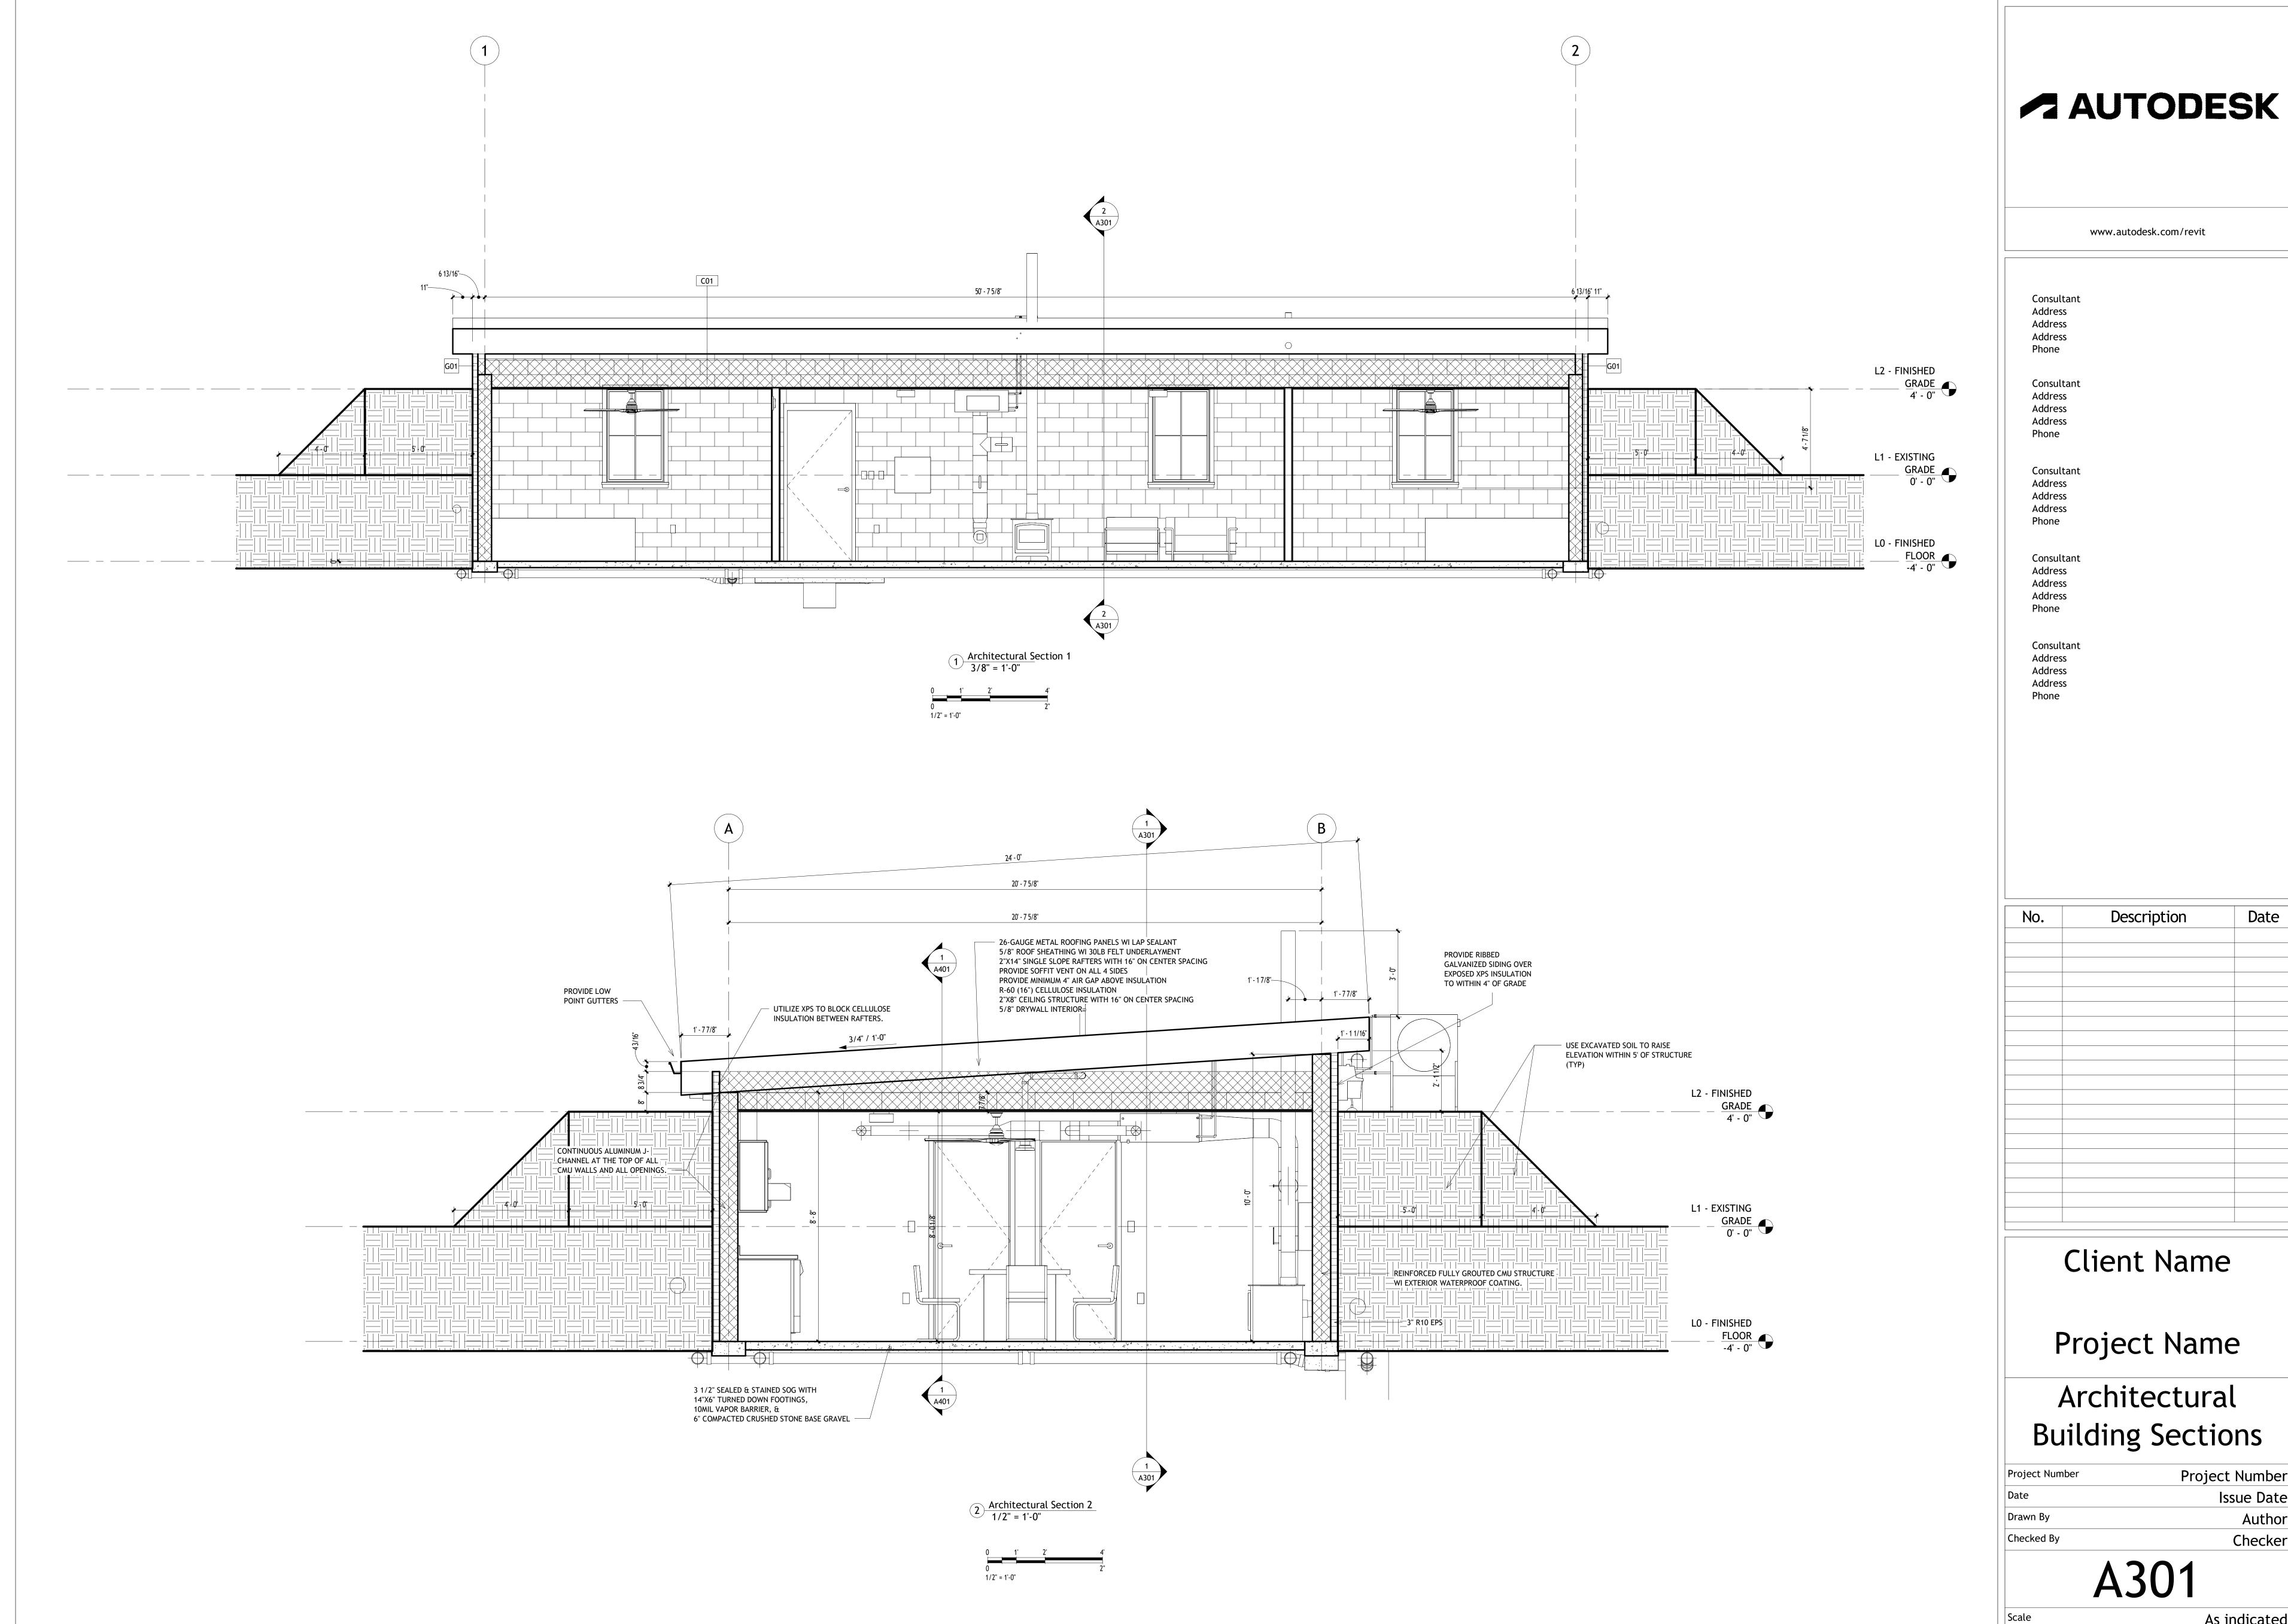

No.	Description	Date

Checker
Author
Issue Date
Project Number

As indicated

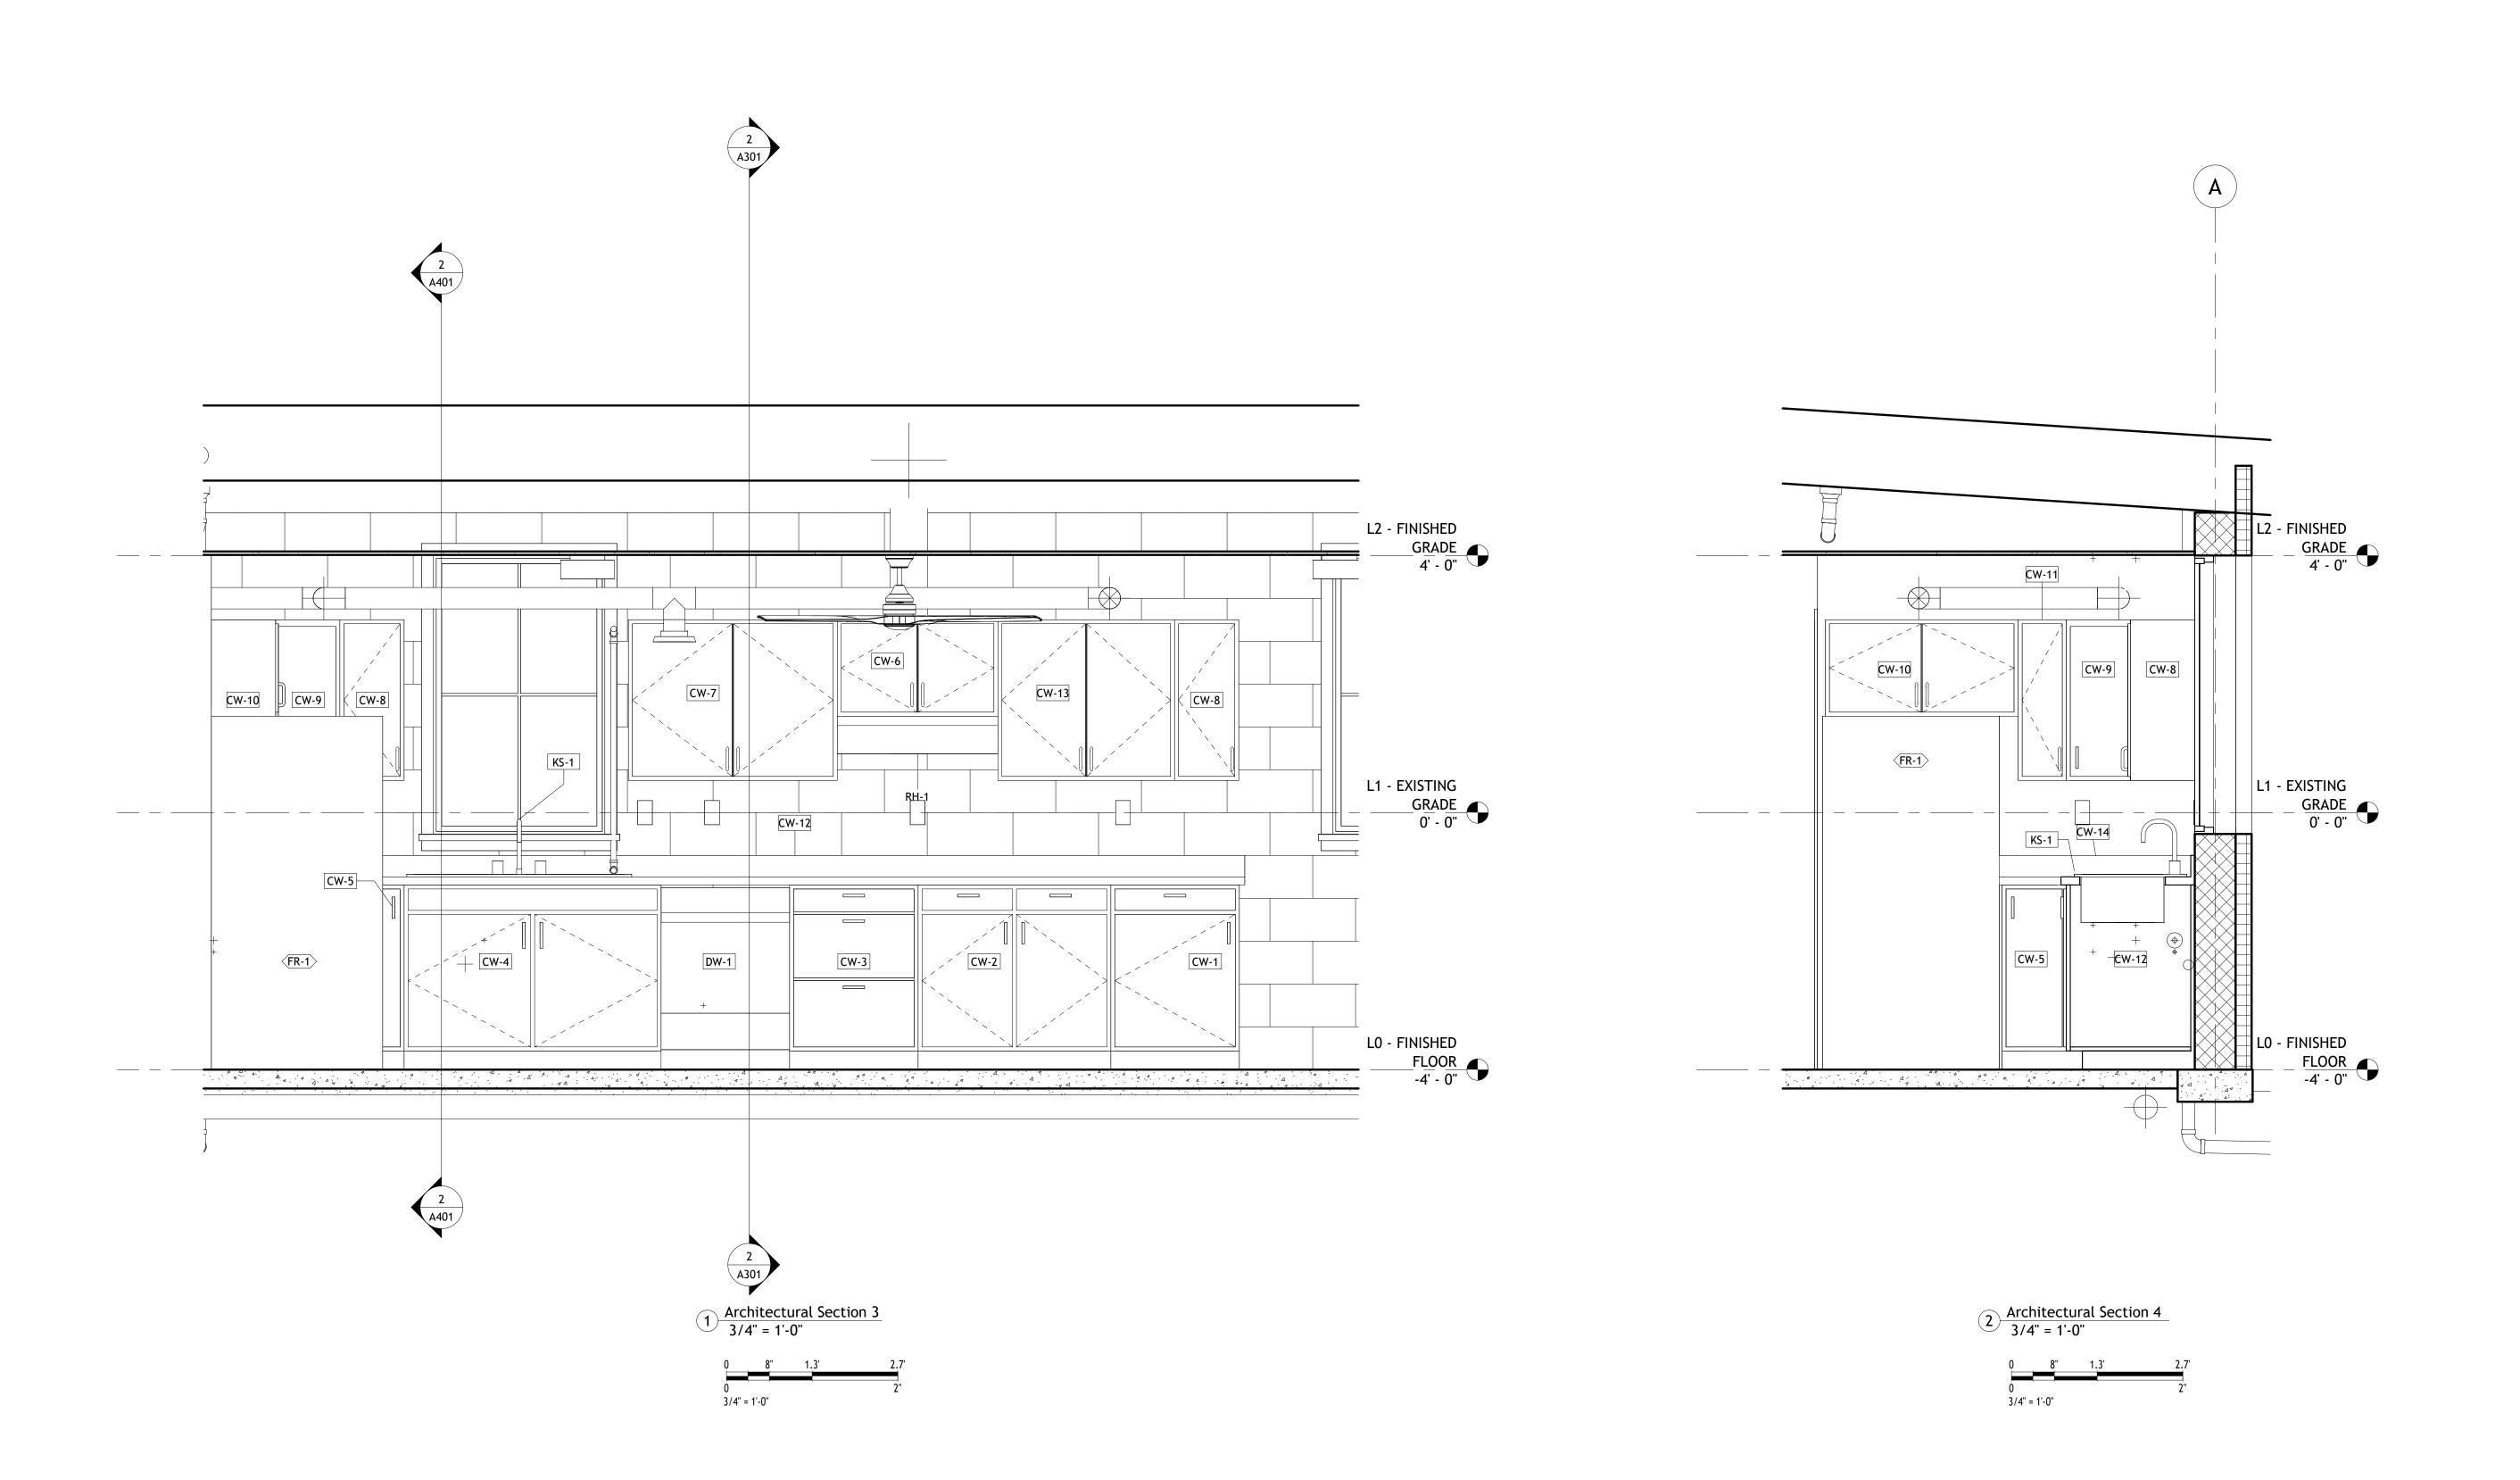



Consultant		
Address		
Address		
Address		
Phone		
THORE		
Consultant		
Address		
Address		
Address		
Phone		
riione		
Consultant		
Address		
Address		
Address		
Phone		
Consultant		
Address		
Address		
Address		
Phone		
Consultant		
Address		
Address		
Address		
Phone		
THORIC		

No.	Description	Date

Client Name


Project Name


Architectural **Enlarged Views**

Issue Date
issue Date
Author
Checker

A401

3/4" = 1'-0"

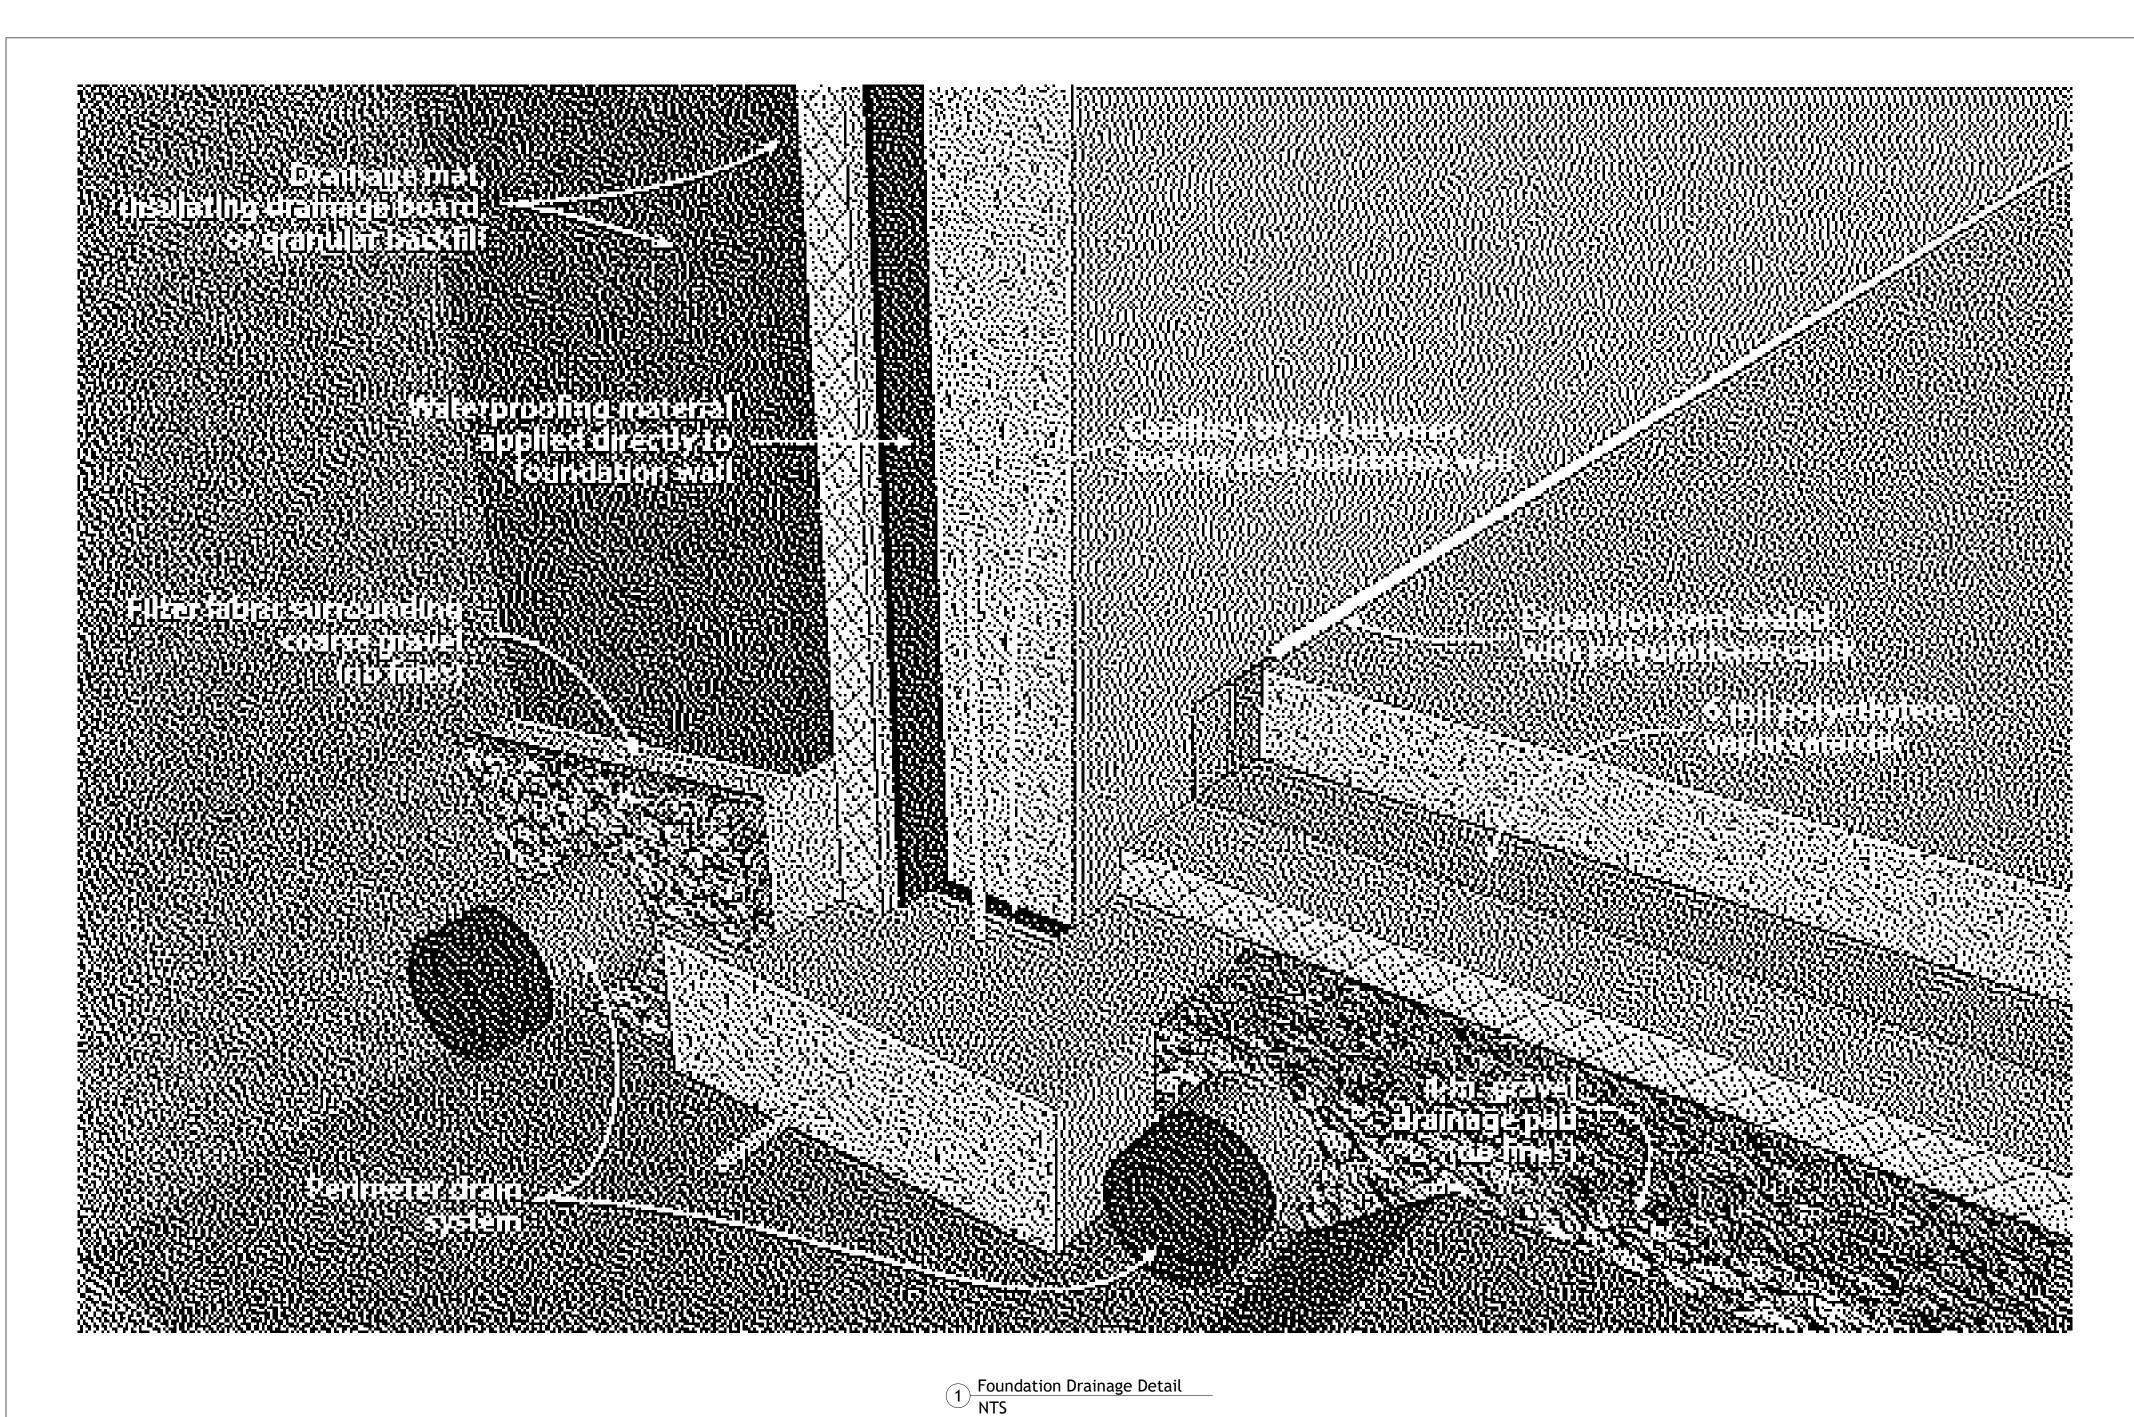

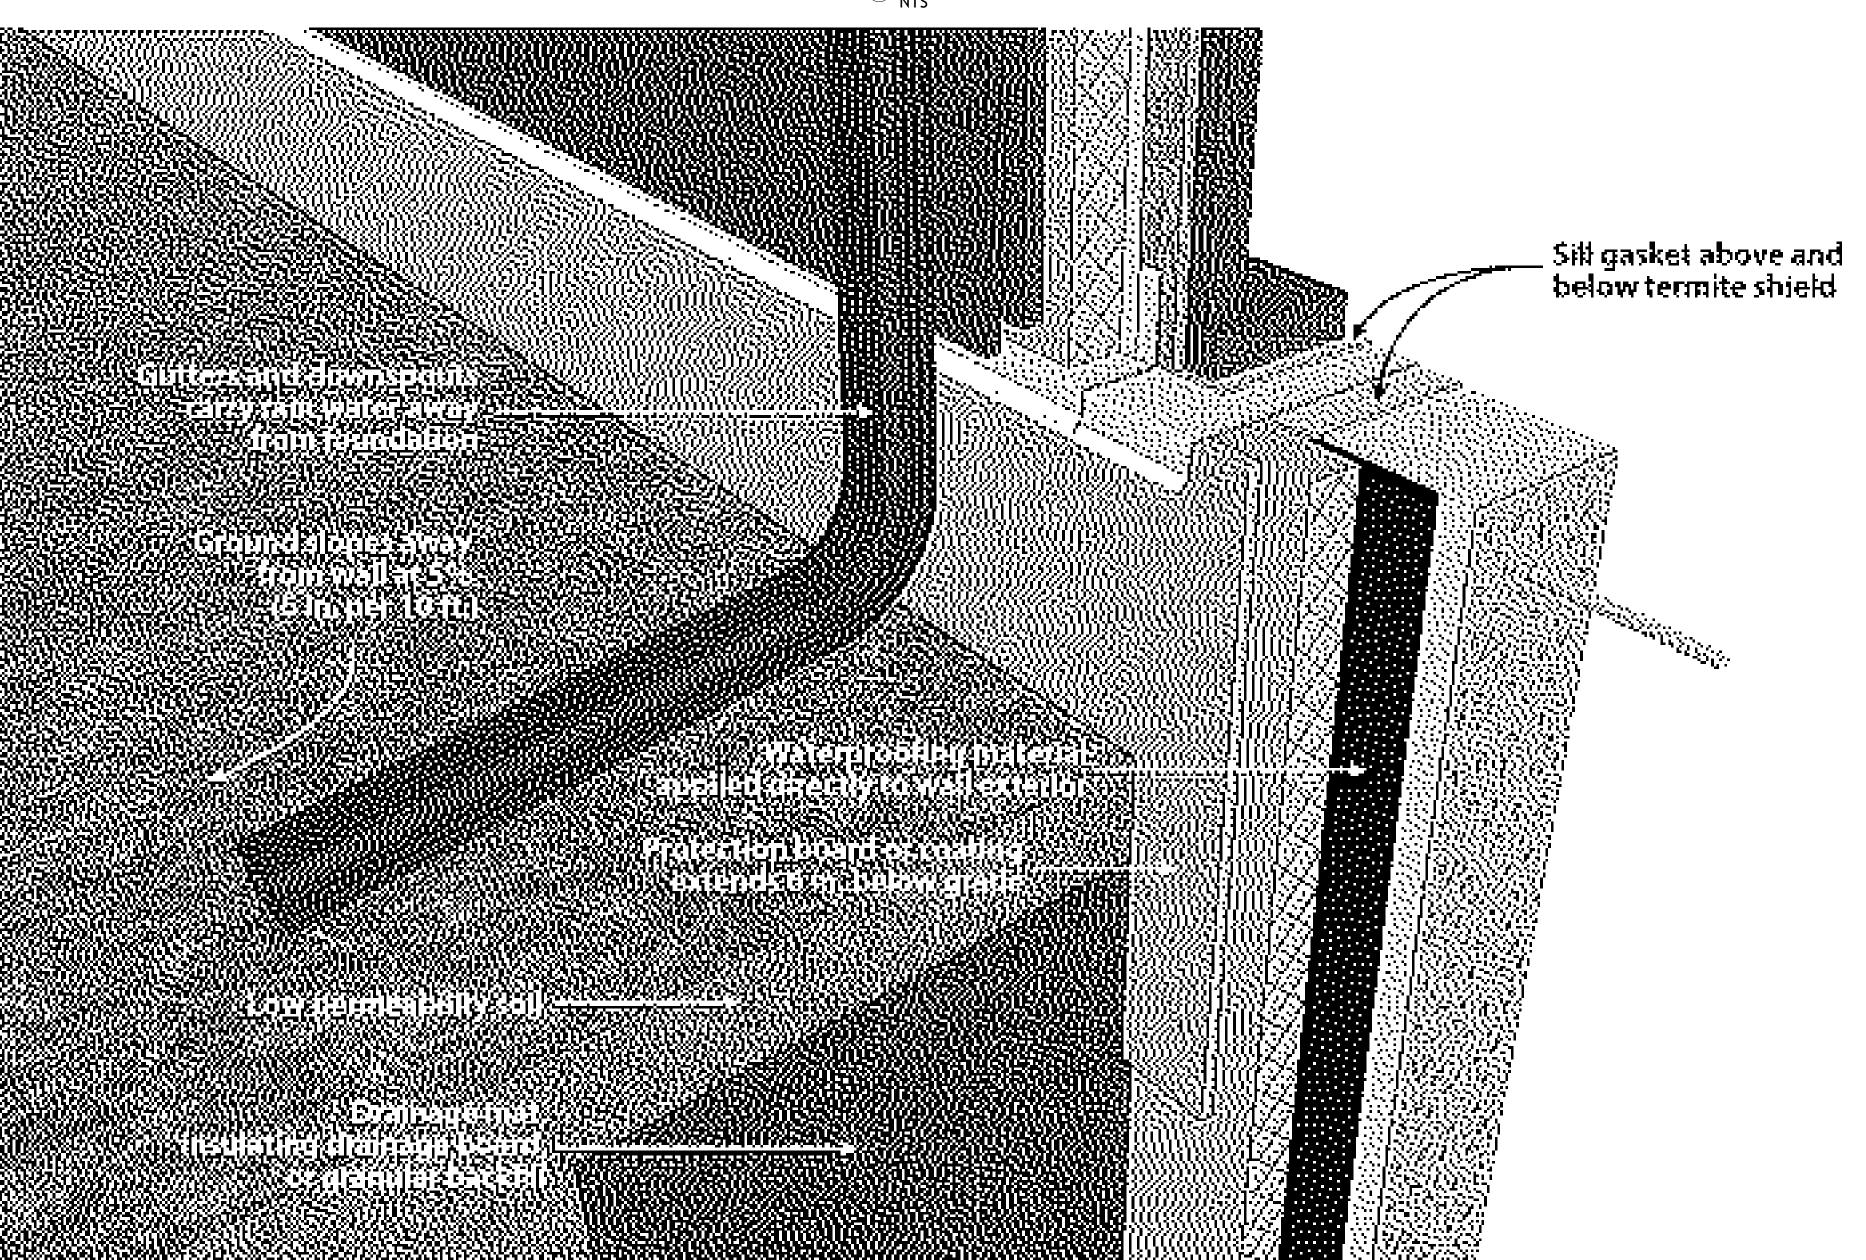

2 Underground Wall Drainage Detail NTS



www.autodesk.com/revit

Consultant Address Address Address Phone
Consultant Address Address Address Phone

No.	Description	Date
	1	

Client Name

Project Name

Architectural Details

Project Number
Issue Date
Author
Checker

A501

Family Description Area Volume

FILL EXCAVATED FILL DIRT 1637 SF 4396.18 CF
ORIGINAL GRADE EXISTING SOIL 5376 SF 22825.76 CF

Ceiling Schedule

Type Mark Description Area Type Comments

C01 Gypsum Wall Board (GWB) Finish 1000 SF 5/8" GWB

Floor Schedule

Description Area Volume Comments

Equipment Schedule

Concrete Floor, 3 1/2" thick, Interior Function

Type Mark Description Manufacturer Model Comments

963 SF

280.90 CF

WS-1 WOOD STOVE STOVE TO INCLUDE COOK TOP

142-1	WOOD STOVE				31046 10 1146	LODE COOK TOP	
			Windo	w Sched	ule		
	9	Size				Head	
Type Mark	Width	Height	Туре	Material	Finish	Height	Comments
		,	'	•		'	
27	2' - 8"	4' - 4"	SINGLE HUNG	PVC	FACTORY	8' - 0"	
27	2' - 8"	4' - 4"	SINGLE HUNG	PVC	FACTORY	8' - 0"	
27	2' - 8"	4' - 4"	SINGLE HUNG	PVC	FACTORY	8' - 0"	
27	2' - 8"	4' - 4"	SINGLE HUNG	PVC	FACTORY	8' - 0"	
27	2' - 8"	4' - 4"	SINGLE HUNG	PVC	FACTORY	8' - 0"	
27	2' - 8"	4' - 4"	SINGLE HUNG	PVC	FACTORY	8' - 0"	
27	2' - 8"	4' - 4"	SINGLE HUNG	PVC	FACTORY	8' - 0"	

Roof Schedule

Description Area Volume Comments

Generic Roof (Material By Category), 14" thick 1287 SF 1500.92 CF

	F	oundation Schedul	e			
Family and Type	Width	Foundation Thickness	Length	Area	Volume	Comments
Wall Foundation: Bearing Footing - 14" x 6"	1' - 2"	0' - 6"	20' - 0"	25 SF	12.72 CF	
Wall Foundation: Bearing Footing - 14" x 6"	1' - 2"	0' - 6"	51' - 3 1/4"	59 SF	29.54 CF	
Wall Foundation: Bearing Footing - 14" x 6"	1' - 2"	0' - 6"	50' - 7 5/8"	59 SF	29.54 CF	
Wall Foundation: Bearing Footing - 14" x 6"	1' - 2"	0' - 6"	20' - 7 5/8"	23 SF	11.36 CF	
Footing-Rectangular: 72" x 14" x 6"	1' - 2"	0' - 6"	6' - 0"	7 SF	3.50 CF	
Grand total: 5	1	1	1	173 SF	86.65 CF	1

			W	Vall Schedule			
Type Mark	Family and Type	Area	Length	Width	Unconnected Height	Volume	Type Comments
G01	Basic Wall: Generic - 3" EIFS	4/2 CE	F4! (4 / 4"	0' - 3"	100' - 0"	44F (7.CF	2" P40 FPC
		463 SF	51' - 6 1/4"	0' - 3"		115.67 CF	3" R10 EPS 3" R10 EPS
G01	Basic Wall: Generic - 3" EIFS	201 SF	21' - 6 1/4"		100' - 0"	50.27 CF	
G01	Basic Wall: Generic - 3" EIFS	438 SF	51' - 6 1/4"	0' - 3"	9' - 4 3/4"	109.46 CF	3" R10 EPS
G01	Basic Wall: Generic - 3" EIFS	199 SF	21' - 6 1/4"	0' - 3"	100' - 0"	49.73 CF	3" R10 EPS
Basic Wall: Gen		1301 SF	146' - 1"			325.13 CF	
G01	Basic Wall: Generic - 4"	14 SF	20' - 3 13/16"	0' - 4"	20' - 0"	4.57 CF	
G01	Basic Wall: Generic - 4"	14 SF	20' - 3 13/16"	0' - 4"	20' - 0"	4.57 CF	
Basic Wall: Gen	eric - 4": 2	27 SF	40' - 7 5/8"			9.13 CF	
G08	Basic Wall: Generic - 8" Masonry	454 SF	50' - 7 5/8"	0' - 7 5/8"	10' - 0"	288.22 CF	8" FULLY GROUTED REINFORCED CMU
G08	Basic Wall: Generic - 8" Masonry	179 SF	20' - 7 5/8"	0' - 7 5/8"	8' - 8"	113.64 CF	8" FULLY GROUTED REINFORCED CMU
G08	Basic Wall: Generic - 8" Masonry	393 SF	50' - 7 5/8"	0' - 7 5/8"	8' - 8"	249.48 CF	8" FULLY GROUTED REINFORCED CMU
G08	Basic Wall: Generic - 8" Masonry	173 SF	20' - 7 5/8"	0' - 7 5/8"	8' - 8"	110.14 CF	8" FULLY GROUTED REINFORCED CMU
Basic Wall: Gen	eric - 8" Masonry: 4	1198 SF	142' - 6 1/2"		'	761.48 CF	
P02	Basic Wall: Interior - 4 1/2" Partition	119 SF	20' - 7 5/8"	0' - 4 1/2"	8' - 0"	44.76 CF	STUD WALL WI DRYWALL & SOUND BATT INSULATION
P02	Basic Wall: Interior - 4 1/2" Partition	104 SF	13' - 6 1/16"	0' - 4 1/2"	8' - 0"	39.05 CF	STUD WALL WI DRYWALL & SOUND BATT INSULATION
P02	Basic Wall: Interior - 4 1/2" Partition	73 SF	9' - 7 9/16"	0' - 4 1/2"	8' - 0"	27.41 CF	STUD WALL WI DRYWALL & SOUND BATT INSULATION
P02	Basic Wall: Interior - 4 1/2" Partition	85 SF	13' - 4 1/16"	0' - 4 1/2"	8' - 0"	32.02 CF	STUD WALL WI DRYWALL & SOUND BATT INSULATION
P02	Basic Wall: Interior - 4 1/2" Partition	85 SF	13' - 4 1/16"	0' - 4 1/2"	8' - 0"	32.02 CF	STUD WALL WI DRYWALL & SOUND BATT INSULATION
P02	Basic Wall: Interior - 4 1/2" Partition	44 SF	6' - 0 1/16"	0' - 4 1/2"	8' - 0"	16.52 CF	STUD WALL WI DRYWALL & SOUND BATT INSULATION
Basic Wall: Inte	rior - 4 1/2" Partition: 6	511 SF	76' - 5 7/16"	'	<u>'</u>	191.78 CF	
Grand total: 16		3038 SF	405' - 8 9/16"			1287.51 CF	

Room Finish Schedule								
Room Number	Room Name	Floor Finish	Base Finish	Wall Finish	Ceiling Finish	Ceiling Height	Comments	
101	BEDROOM 1	SEALED CONCRETE	WHITE PAINT	WHITE PAINT	WHITE PAINT	8' - 0"		
100	MAIN ROOM	SEALED CONCRETE	WHITE PAINT	WHITE PAINT	WHITE PAINT	8' - 0"		
103	BEDROOM 3	SEALED CONCRETE	WHITE PAINT	WHITE PAINT	WHITE PAINT	8' - 0"		
104	RESTROOM	SEALED CONCRETE	WHITE PAINT	WHITE PAINT	WHITE PAINT	8' - 0"		
102	BEDROOM 2	SEALED CONCRETE	WHITE PAINT	WHITE PAINT	WHITE PAINT	8' - 0"		

						Door So	chedule				
			Door					Frame		Hardware	
		Size								From	
Mark	Width	Height	Thickness	Material	Finish	Under Cut	Material	Туре	Finish	Room: Number	Comments
112	3' - 0"	7' - 0"	0' - 1 3/4"	METAL	FACTORY	N	WOOD	EXTERIOR	FACTORY	100	EXTERIOR HOLLOW METAL FRAME DOOR
						IN					
146	2' - 8"	7' - 0''	0' - 1 3/4"	WOOD	FACTORY	Υ	WOOD	INTERIOR	FACTORY	100	STANDARD INTERIOR DOOR
147	2' - 8"	7' - 0"	0' - 1 3/4"	WOOD	FACTORY	Υ	WOOD	INTERIOR	FACTORY	101	STANDARD INTERIOR DOOR
148	2' - 8"	7' - 0"	0' - 1 3/4"	WOOD	FACTORY	Υ	WOOD	INTERIOR	FACTORY	100	STANDARD INTERIOR DOOR
149	3' - 0"	7' - 0"	0' - 1 3/4"	ALUMINUM	FACTORY	N	ALUMINUM	EXTERIOR	FACTORY		STORM DOOR
150	2' - 8"	7' - 0"	0' - 1 3/4"	WOOD	FACTORY	Υ	WOOD	EXTERIOR	FACTORY	103	STANDARD INTERIOR DOOR

				Casework Schedule							
Type Mark	Family and Type	Description	Elevation from Level	Level	Manufacturer	Model	Width	Depth	Height	Count	Comments
CW-1	Base Cabinet-Single Door & Drawer: 24"		O' - O''	LO - FINISHED FLOOR			2' - 0"	2' - 0"	2' - 10 1/2"	1	
CW-2	Base Cabinet-Double Door & 2 Drawer: 36"		0' - 0"	LO - FINISHED FLOOR			3' - 0"	2' - 0"	2' - 10 1/2"	1	
CW-3	Base Cabinet-3 Drawers: 24"		0' - 0"	LO - FINISHED FLOOR			2' - 0"	2' - 0"	2' - 10 1/2"	1	
CW-4	Base Cabinet-Double Door Sink Unit: 48"		0' - 0"	LO - FINISHED FLOOR			4' - 0"	2' - 0"	2' - 10 1/2"	1	
CW-5	Base Cabinet-Corner Unit-Square: 36"		0' - 0"	LO - FINISHED FLOOR			3' - 0"	2' - 0"	2' - 10 1/2"	1	
CW-6	Upper Cabinet-Double Door-Short-Wall: 30"	!	5' - 6"	LO - FINISHED FLOOR			2' - 6"	1' - 0"	1' - 6"	1	
CW-7	Upper Cabinet-Double Door-Wall: 39"	4	4' - 6"	LO - FINISHED FLOOR			3' - 3"	1' - 0"	2' - 6"	1	
CW-8	Upper Cabinet-Single Door-Wall: 12"	4	4' - 6"	LO - FINISHED FLOOR			1' - 0"	1' - 0"	2' - 6"	2	
CW-9	Upper Cabinet-Corner Unit Square-Wall: 12" Depth	4	4' - 6"	LO - FINISHED FLOOR				1' - 0"	2' - 6"	1	
CW-10	Upper Cabinet-Double Door-Short-Wall: 36"	!	5' - 6"	LO - FINISHED FLOOR			3' - 0"	1' - 0"	1' - 6"	1	
CW-11	Upper Cabinet-Single Door-Wall: 9"	4	4' - 6"	LO - FINISHED FLOOR			0' - 9"	1' - 0"	2' - 6"	1	
CW-12	Counter Top w Sink: 24" Depth		0' - 0"	LO - FINISHED FLOOR				2' - 1"	3' - 0"	1	14'-0"
CW-13	Upper Cabinet-Double Door-Wall: 33"	4	4' - 6"	LO - FINISHED FLOOR			2' - 9"	1' - 0"	2' - 6"	1	
CW-14	Counter Top: 24" Depth	(0' - 0"	LO - FINISHED FLOOR				2' - 1"	3' - 0"	1	3'-1"



www.autodesk.com/revit

Consultant
Address
Address
Address
Phone

Consultant
Address
Address
Address
Phone

Consultant
Address

Address Phone

Consultant Address Address

No. Description Date

Client Name

Project Name

Architectural Schedules

Project Number


Date
Drawn By
Checked By

Project Number
Issue Date
Author
Checked By

4601

Scale

NOTES: 1. PLUMBING TO BE EXPOSED WHERE FEASIBLE.

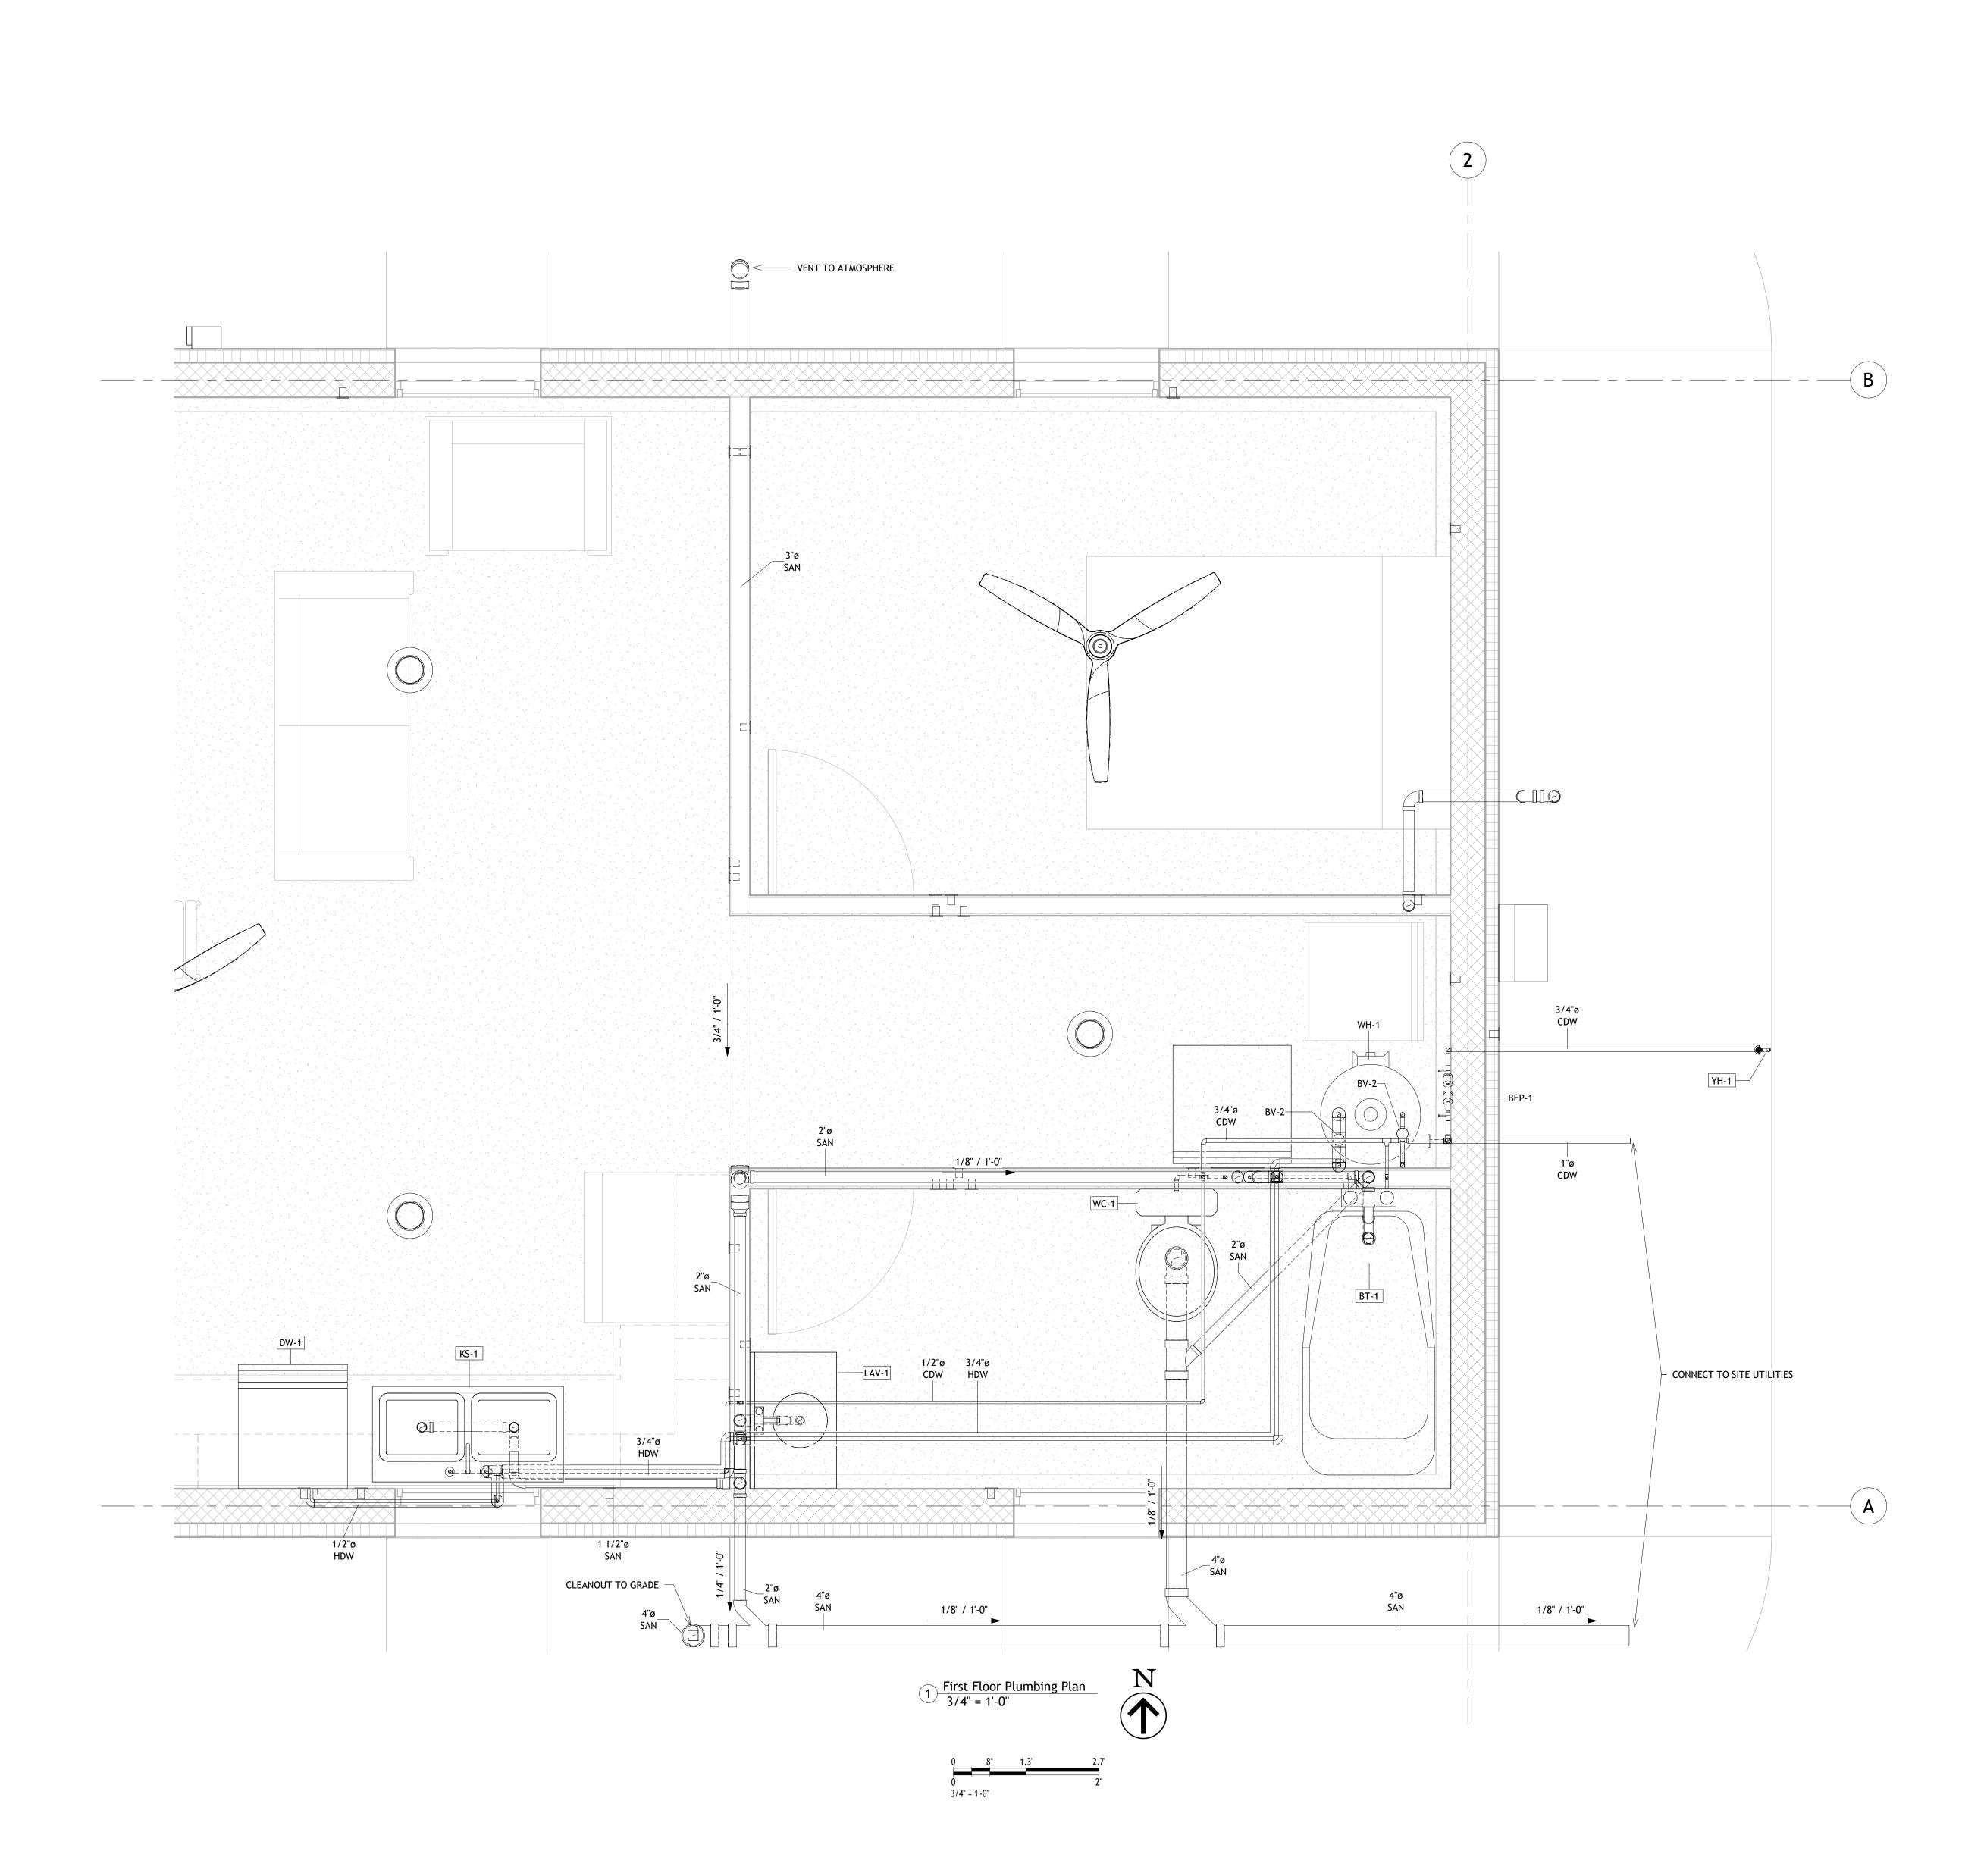



www.autodesk.com/revit

s s			
s s			
	tant s s s tant s s tant s s tant s s s tant s s s	tant s s s tant s s s tant s s s s	s s s s s s s s s s s s s s s s s s s

No.	Description	Date

Client Name


Project Name

Plumbing Plans

Project Number Project Number Issue Date Author Checker

P101

3/4" = 1'-0"

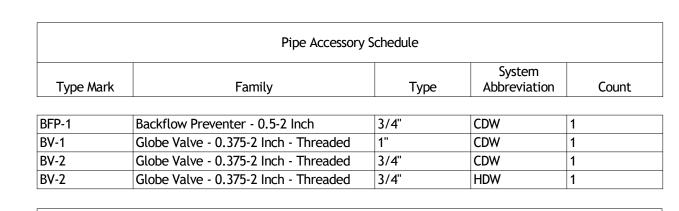

Plumbing Fixture Schedule						
Type Mark	Family and Type	Manufacturer	Model			
BT-1	Bath Tub - Maestro: 66"x36" - Private					
DW-1	Dishwasher: 26"x24"					
KS-1	Sink - Kitchen - Double: 42"x21" - Private					
LAV-1	Lavatory - Vanity: 30"x18" - Private					
WB-1	Plumbing_Fixture-Oatey-Quadtro_WMOB: Copper Sweat Connector	Oatey Company	38530			
WC-1	Water Closet - Flush Tank: Private - 1.6 gpf					
YH-1	Hydrant_5910_JRSmith: Depth Of Bury (4 Ft)	Jay R. Smith Mfg. Co.	5910			

		Pipe Insulation	Schedule			
System Abbreviation	Pipe Size	Family	Туре	Insulation Thickness	Count	Length
HDW	1/2"ø	Pipe Insulation	Foam	1"	13	14' - 9 7/32"
HDW	1/2"ø-1/2"ø	Pipe Insulation	Foam	1"	7	0' - 0"
HDW	1/2"ø-1/2"ø-1/2"ø	Pipe Insulation	Foam	1"	2	0' - 0"
HDW	3/4"ø	Pipe Insulation	Foam	1"	13	29' - 4 3/16"
HDW	3/4"ø-1/2"ø	Pipe Insulation	Foam	1"	3	0' - 0"
HDW	3/4"ø-3/4"ø	Pipe Insulation	Foam	1"	10	0' - 0"
HDW	3/4"ø-3/4"ø-3/4"ø	Pipe Insulation	Foam	1"	2	0' - 0"
Grand total: 50		,	1		-	44' - 1 13/32"

Pipe Fitting Schedule							
System Abbreviation	Family	Size	Count				
CDW	Elbow - Generic	1"ø-1"ø	2				
CDW	Tee - Generic	1"ø-1"ø-1"ø	1				
CDW	Transition - Generic	1"ø-3/4"ø	2				
CDW	Elbow - Generic	1/2"ø-1/2"ø	9				
CDW	Tee - Generic	1/2"ø-1/2"ø-1/2"ø	2				
CDW	Transition - Generic	3/4"ø-1/2"ø	5				
CDW	Elbow - Generic	3/4"ø-3/4"ø	9				
CDW	Tee - Generic	3/4"ø-3/4"ø-3/4"ø	3				
FD	Bend - PVC - Sch 40 - DWV	4"ø-4"ø	13				
FD	Tee Reducing Sanitary - PVC - Sch 40 - DWV	4"ø-4"ø-2"ø	2				
FD	Tee Sanitary - PVC - Sch 40 - DWV	4"ø-4"ø-4"ø	2				
HDW	Elbow - Generic	1/2"ø-1/2"ø	7				
HDW	Tee - Generic	1/2"ø-1/2"ø-1/2"ø	2				
HDW	Transition - Generic	3/4"ø-1/2"ø	3				
HDW	Elbow - Generic	3/4"ø-3/4"ø	9				
HDW	Tee - Generic	3/4"ø-3/4"ø-3/4"ø	2				
LIQ	Elbow - Welded - Generic	1/2"ø-1/2"ø	5				
LIQ.	Reducer - PVC - Sch 40 - DWV	5/8"ø-1/2"ø	1				
RA	Bend - PVC - Sch 40 - DWV	4"ø-4"ø	5				
RA	Plug - PVC - Sch 40 - DWV	6"ø	2				
RA	Reducer - PVC - Sch 40 - DWV	6"ø-4"ø	1				
RA	Bend - PVC - Sch 40 - DWV	6"ø-6"ø	3				
RA	Tee Sanitary - PVC - Sch 40 - DWV	6"ø-6"ø-6"ø	1				
RA	Wye Combination with 8th Bend - PVC - Sch 40 - DWV	6"ø-6"ø-6"ø	1				
RV	Bend - PVC - Sch 40 - DWV	2"ø-2"ø	10				
SAN	Bend - PVC - Sch 40 - DWV	1 1/2"ø-1 1/2"ø	2				
SAN	Trap P - PVC - Sch 40 - DWV	1 1/2 ø-1 1/2 ø	1				
SAN	Tee Sanitary - PVC - Sch 40 - DWV	1 1/2"ø-1 1/2"ø-1 1/2"ø	1				
SAN	Trap P - PVC - Sch 40 - DWV	1 1/4"ø-1 1/4"ø	1				
SAN	Reducer - PVC - Sch 40 - DWV	2"ø-1 1/2"ø	2				
SAN	Bend - PVC - Sch 40 - DWV	2"ø-2"ø	7				
SAN	Trap P - PVC - Sch 40 - DWV	2"ø-2"ø	2				
SAN	Tee Sanitary - PVC - Sch 40 - DWV	2"ø-2"ø-2"ø	4				
SAN	Reducer - PVC - Sch 40 - DWV	3"ø-2"ø	2				
	Bend - PVC - Sch 40 - DWV	3 ø-2 ø 3"ø-3"ø					
SAN SAN			1				
	Tee Sanitary - PVC - Sch 40 - DWV	3"ø-3"ø-3"ø	1				
SAN	Bend - PVC - Sch 40 - DWV	3/4"ø-3/4"ø	3				
SAN	Plug - PVC - Sch 40 - DWV	4"ø	1				
SAN	Reducer - PVC - Sch 40 - DWV	4"ø-3"ø	1				
SAN	Bend - PVC - Sch 40 - DWV	4"ø-4"ø	2				
SAN	Wye 45 Deg Reducing - PVC - Sch 40 - DWV	4"ø-4"ø-2"ø	1				
SAN	Wye Combination with 8th Bend - PVC - Sch 40 - DWV	4"ø-4"ø-2"ø	1				
SAN	Wye Combination with 8th Bend - PVC - Sch 40 - DWV	4"ø-4"ø-4"ø	1				
/AP	Elbow - Generic	1/2"ø-1/2"ø	7				
VAP	Reducer - PVC - Sch 40 - DWV	5/8"ø-1/2"ø	1				


Plumbing Equipment Schedule						
Mark	Description	Volt	Phase	Frequency	Comments	
WM-1	Residential Washing Machine	120	1	60		
FS-1	18"Dia x 22"D Foundation Sump Pit	120			Include Foot Traffic Rated Grating	
WH-1	50 Gallon Heat Pump Water Heater	120	1	60		

System			Insulation					
Abbreviation	Size	Description	Thickness	Insulation Type	Length	System Type		
CDW	1"ø	PEX	0"		10' - 5 1/32"	Domestic Cold Water		
			0"					
CDW	1/2"ø	PEX			33' - 11 13/16"	Domestic Cold Water		
CDW	3/4"ø	PEX	0"		23' - 3 13/16"	Domestic Cold Water		
FD	4"ø	Corrugated Slotted HDPE	0"		273' - 11 5/32"	Foundation Drainage		
HDW	1/2"ø	PEX	1"	Foam	14' - 9 7/32"	Domestic Hot Water		
HDW	3/4"ø	PEX	1"	Foam	29' - 4 3/16"	Domestic Hot Water		
LIQ	1/2"ø	Copper Tubing	0"		10' - 3 1/2"	Refrigerant Liquid		
RA	4"ø	SCH 10 PVC DWV	0"		57' - 4 1/16"	Return Air		
RA	6"ø	SCH 10 PVC DWV	0"		87' - 3 5/8"	Return Air		
RV	2"ø	SCH 10 PVC DWV	0"		29' - 9 29/32"	Radon Vent		
SAN	1 1/2"ø	SCH 40 PVC DWV	0"		5' - 9 1/16"	Sanitary		
SAN	1 1/4"ø	SCH 40 PVC DWV	0"		0' - 10 11/32"	Sanitary		
SAN	2"ø	SCH 40 PVC DWV	0"		44' - 9 3/8"	Sanitary		
SAN	3"ø	SCH 40 PVC DWV	0"		16' - 8 7/8"	Sanitary		
SAN	3/4"ø	SCH 40 PVC DWV	0"		23' - 3 25/32"	Sanitary		
SAN	4"ø	SCH 40 PVC DWV	0"		28' - 10 15/32"	Sanitary		
VAP	1/2"ø	Copper Tubing	0"		11' - 9 3/8"	Refrigerant Vapor		

WC-1

	Piping System Scheo	dule
Abbreviation	Description	System Classification
CDW	Cold Domestic Water	Domestic Cold Water
FD	Foundation Drainage	Other
HDW	Hot Domestic Water	Domestic Hot Water
LIQ	Liquid Refrigerant	Other
RA	Return Air	Other
RV	Return Air	Other
RV	Return Air	Other
SAN	Sanitary Sewer	Sanitary
SAN	Sanitary Sewer	Sanitary
VAP	Vapor Refrigerant	Other

1/2"ø____/ CDW

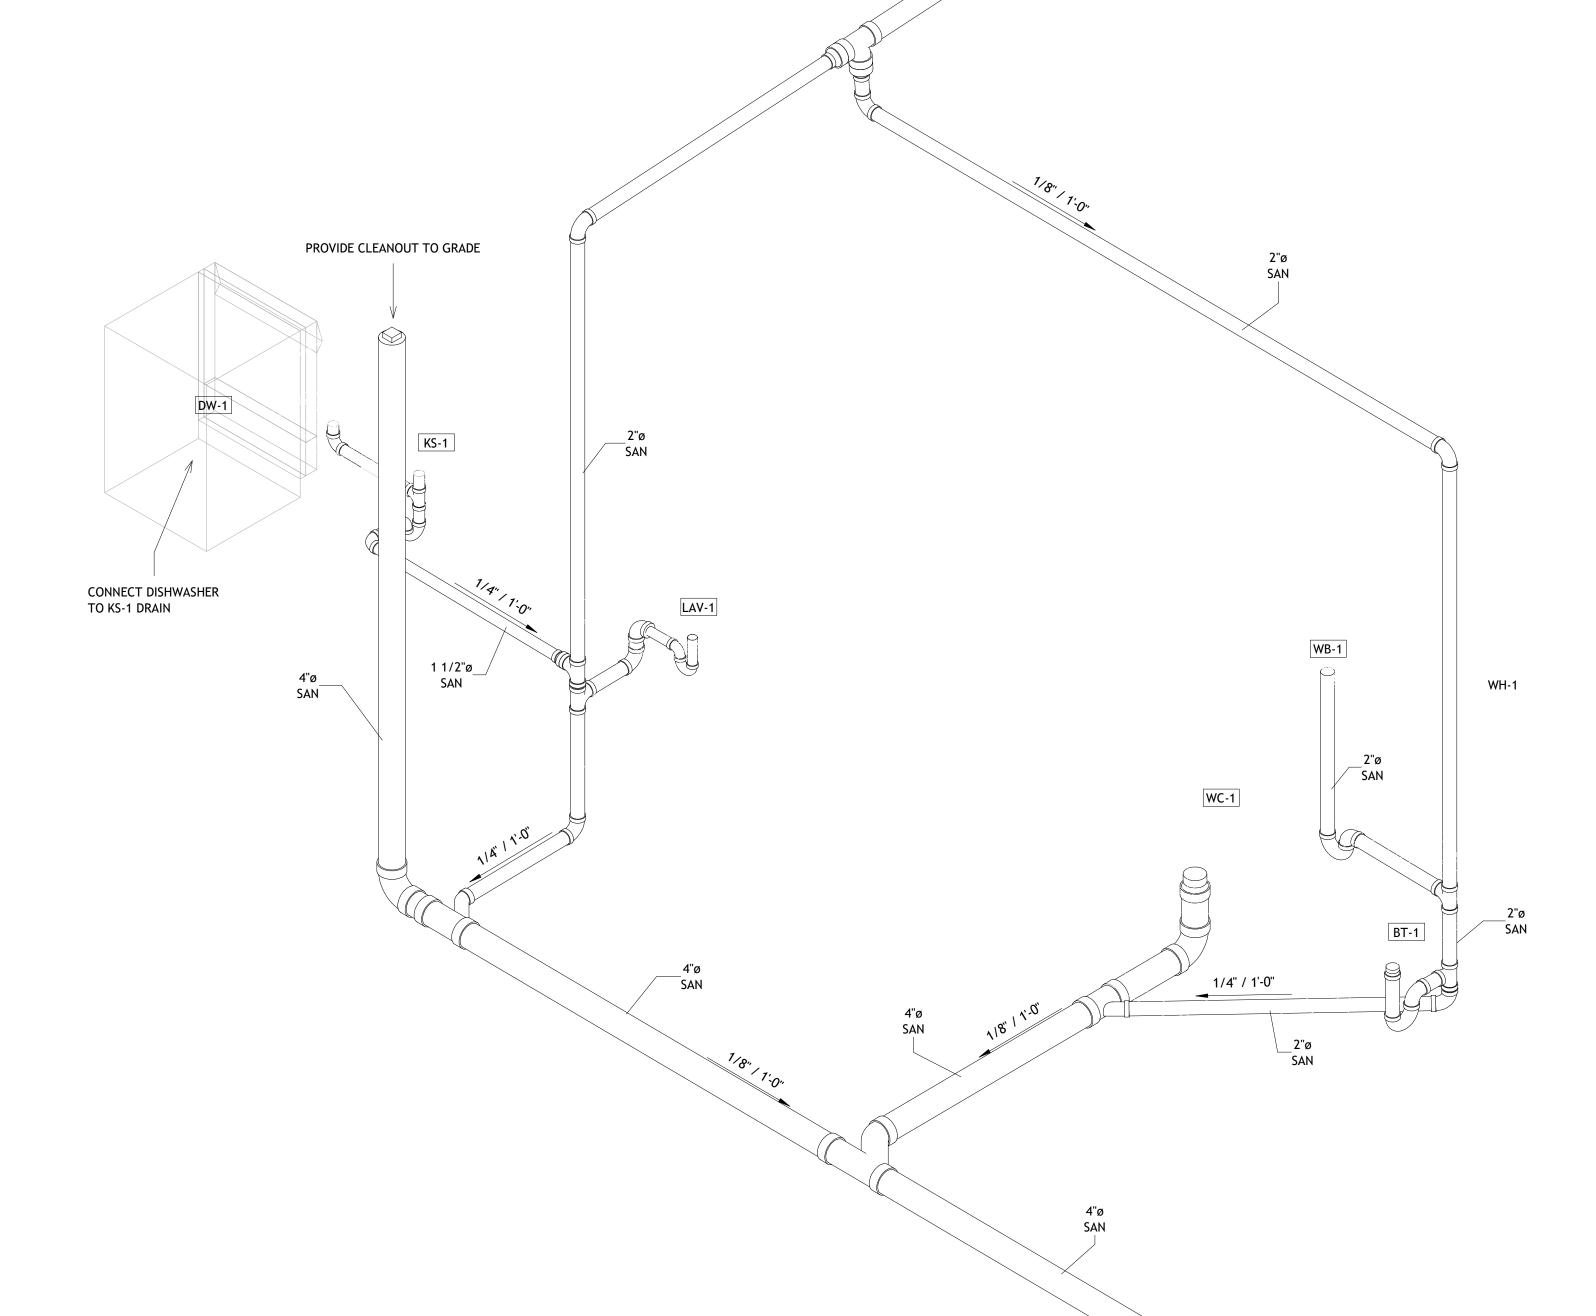



ATMOSPHERE -

www.autodesk.com/revit

Consultant Address Address Address Phone		
Consultant Address Address Address Phone		

No.	Description	Date

Client Name


Project Name


Plumbing Schedules


Project Number Date Drawn By Checked By Project Number Issue Date Author Checked By		(01
Date Issue Date	Checked By	Checker
	Drawn By	Author
Project Number Project Number	Date	Issue Date
	Project Number	Project Number

P601

11/25/2024 2:03:03 PM

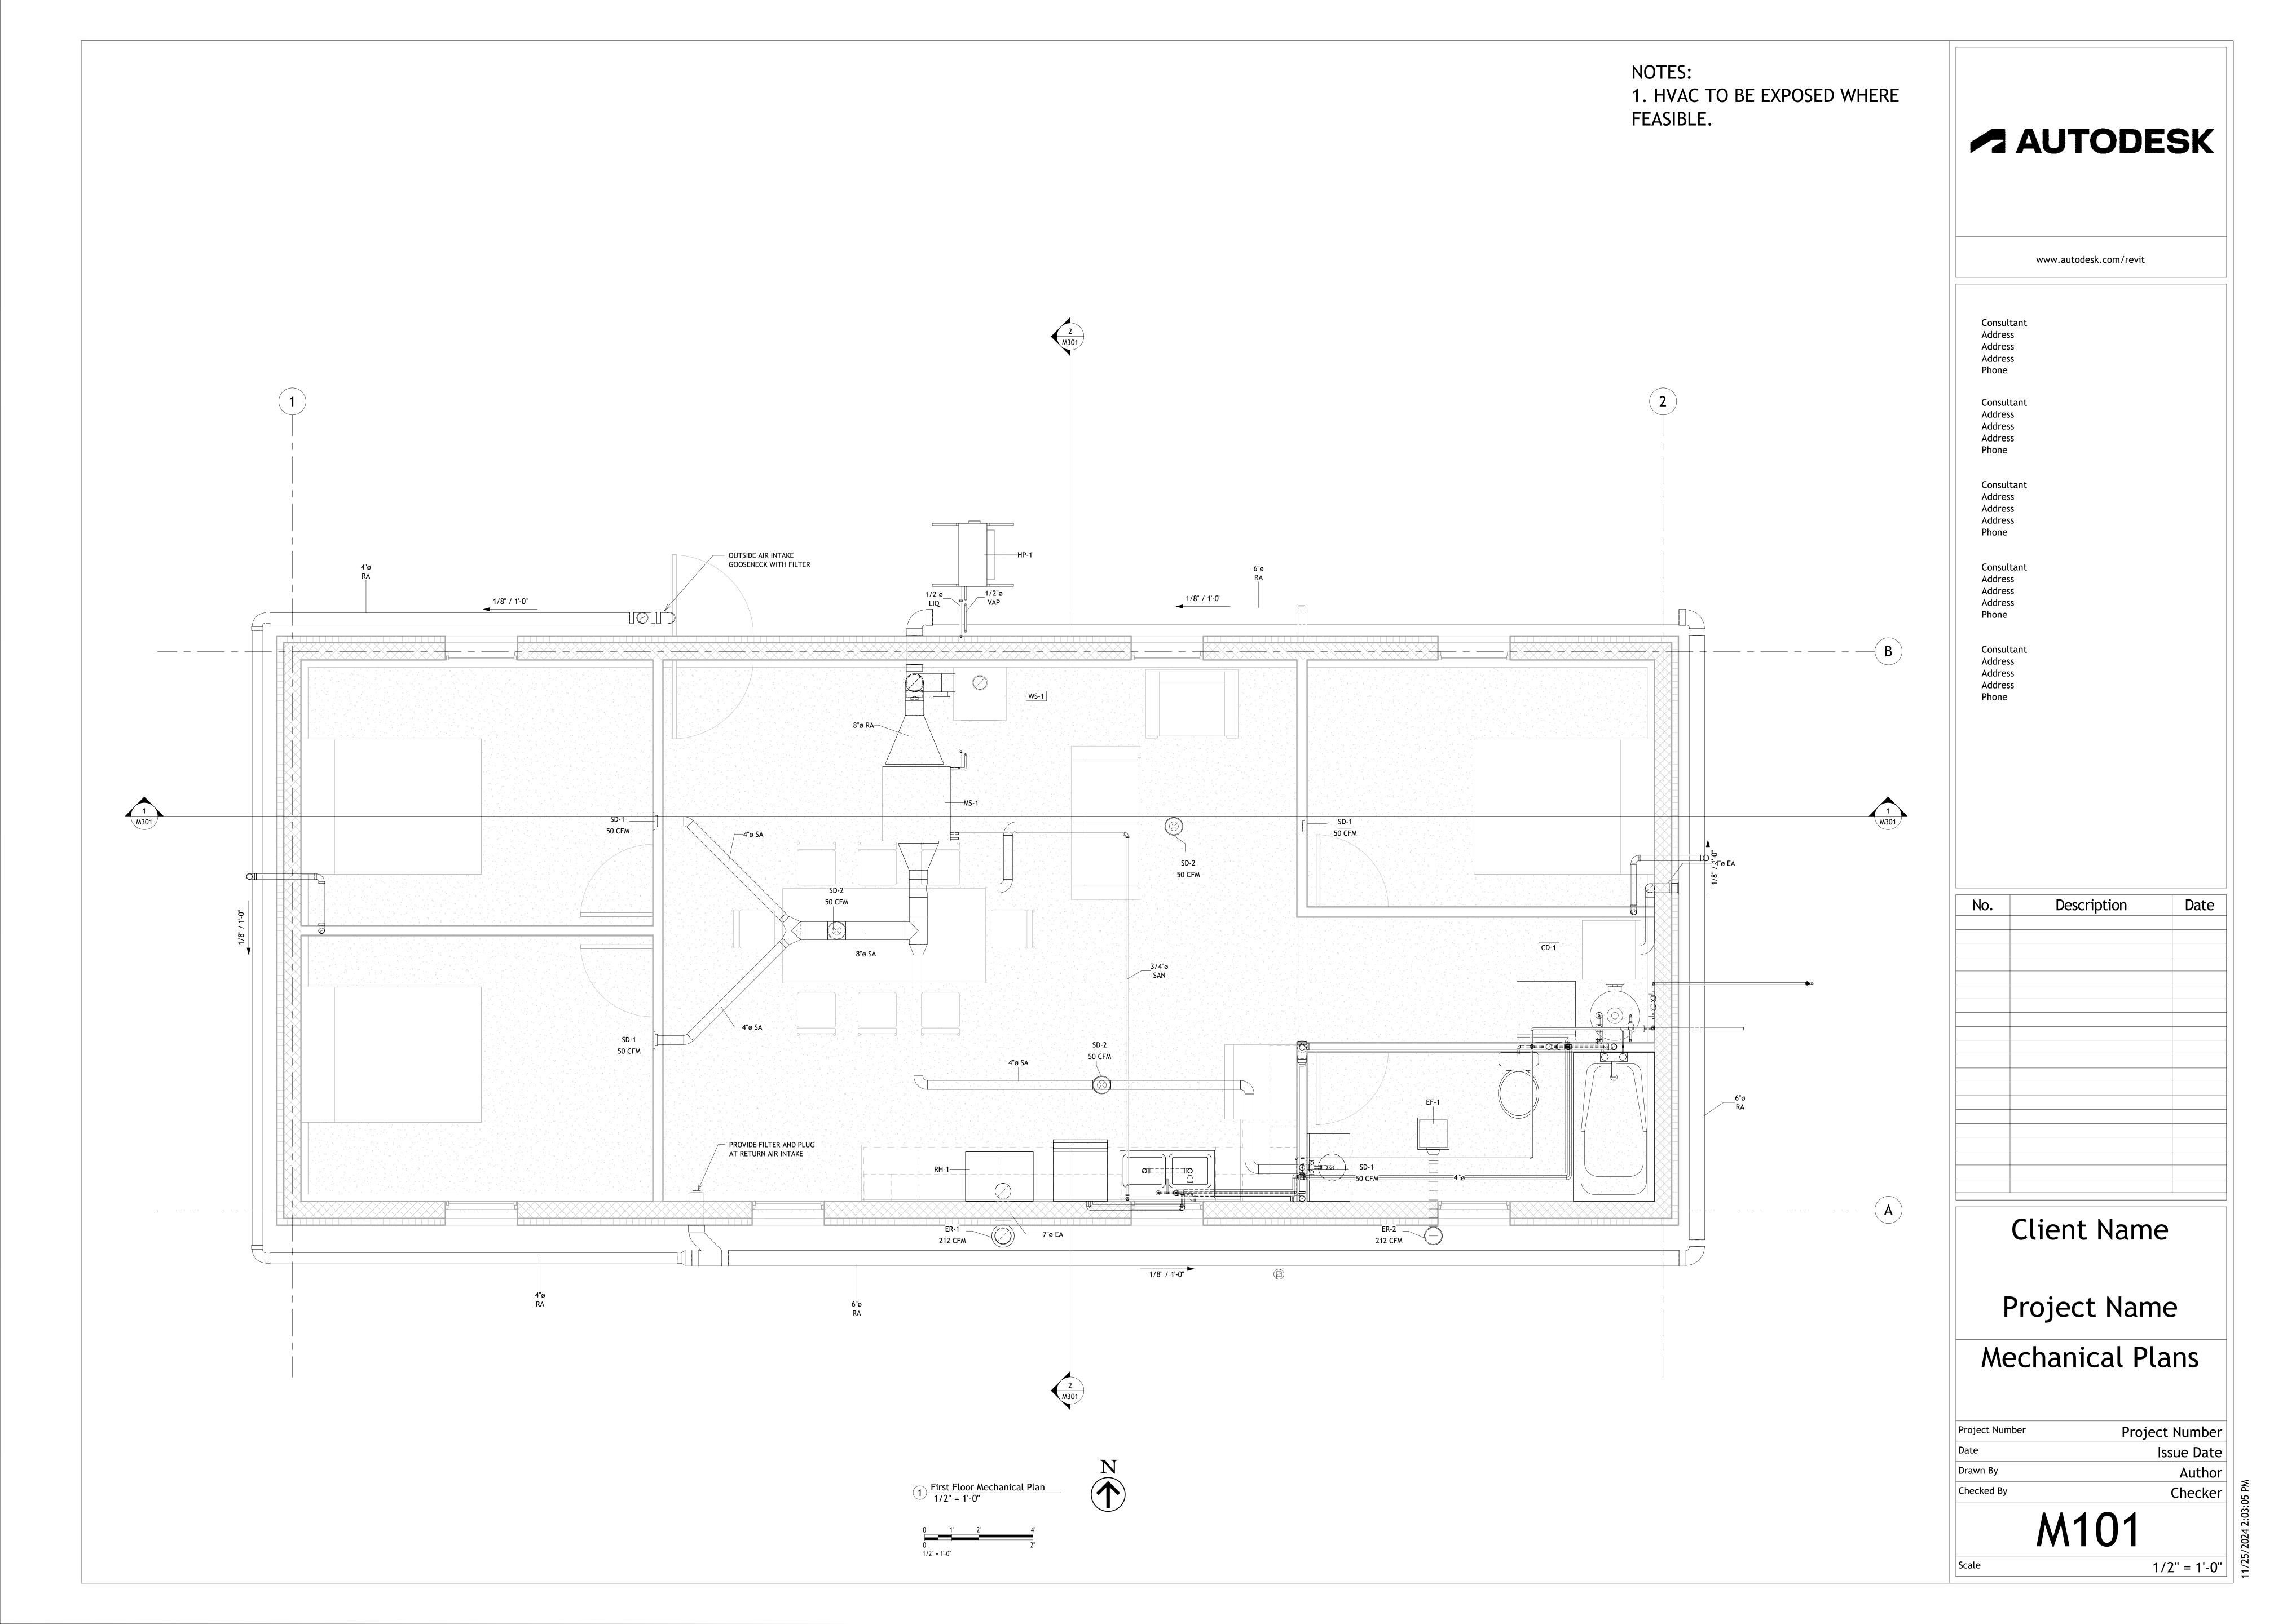

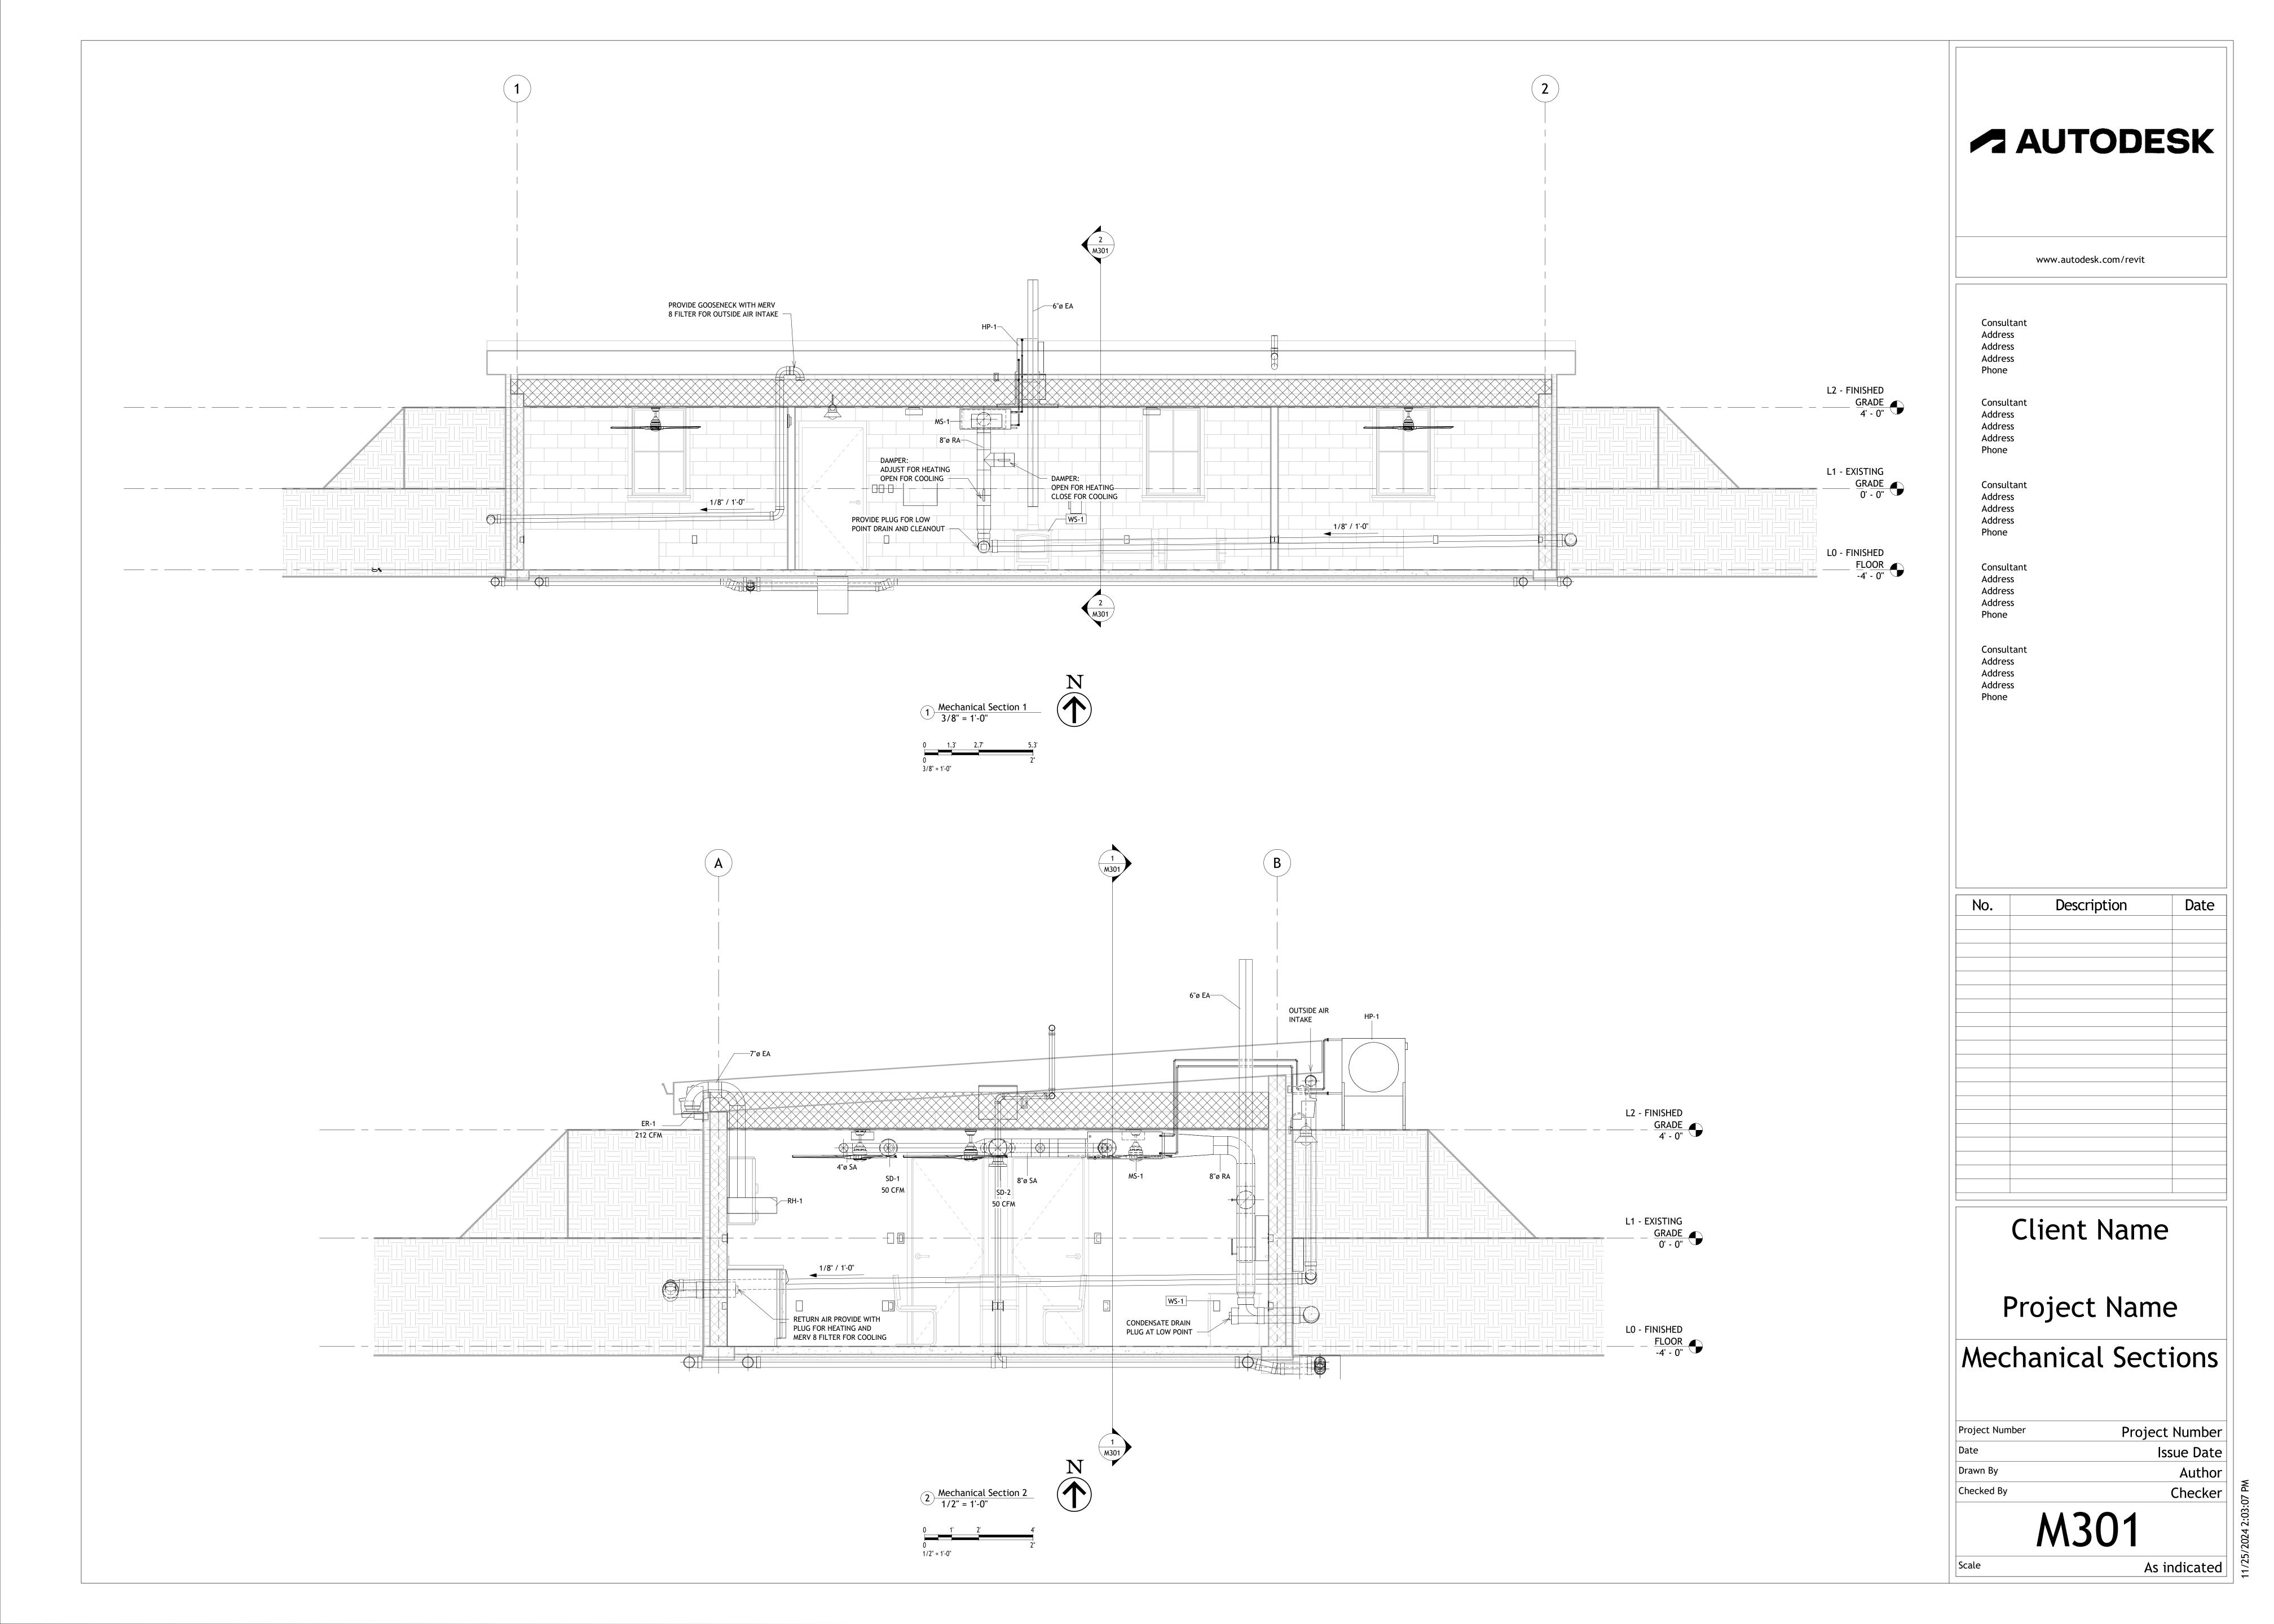

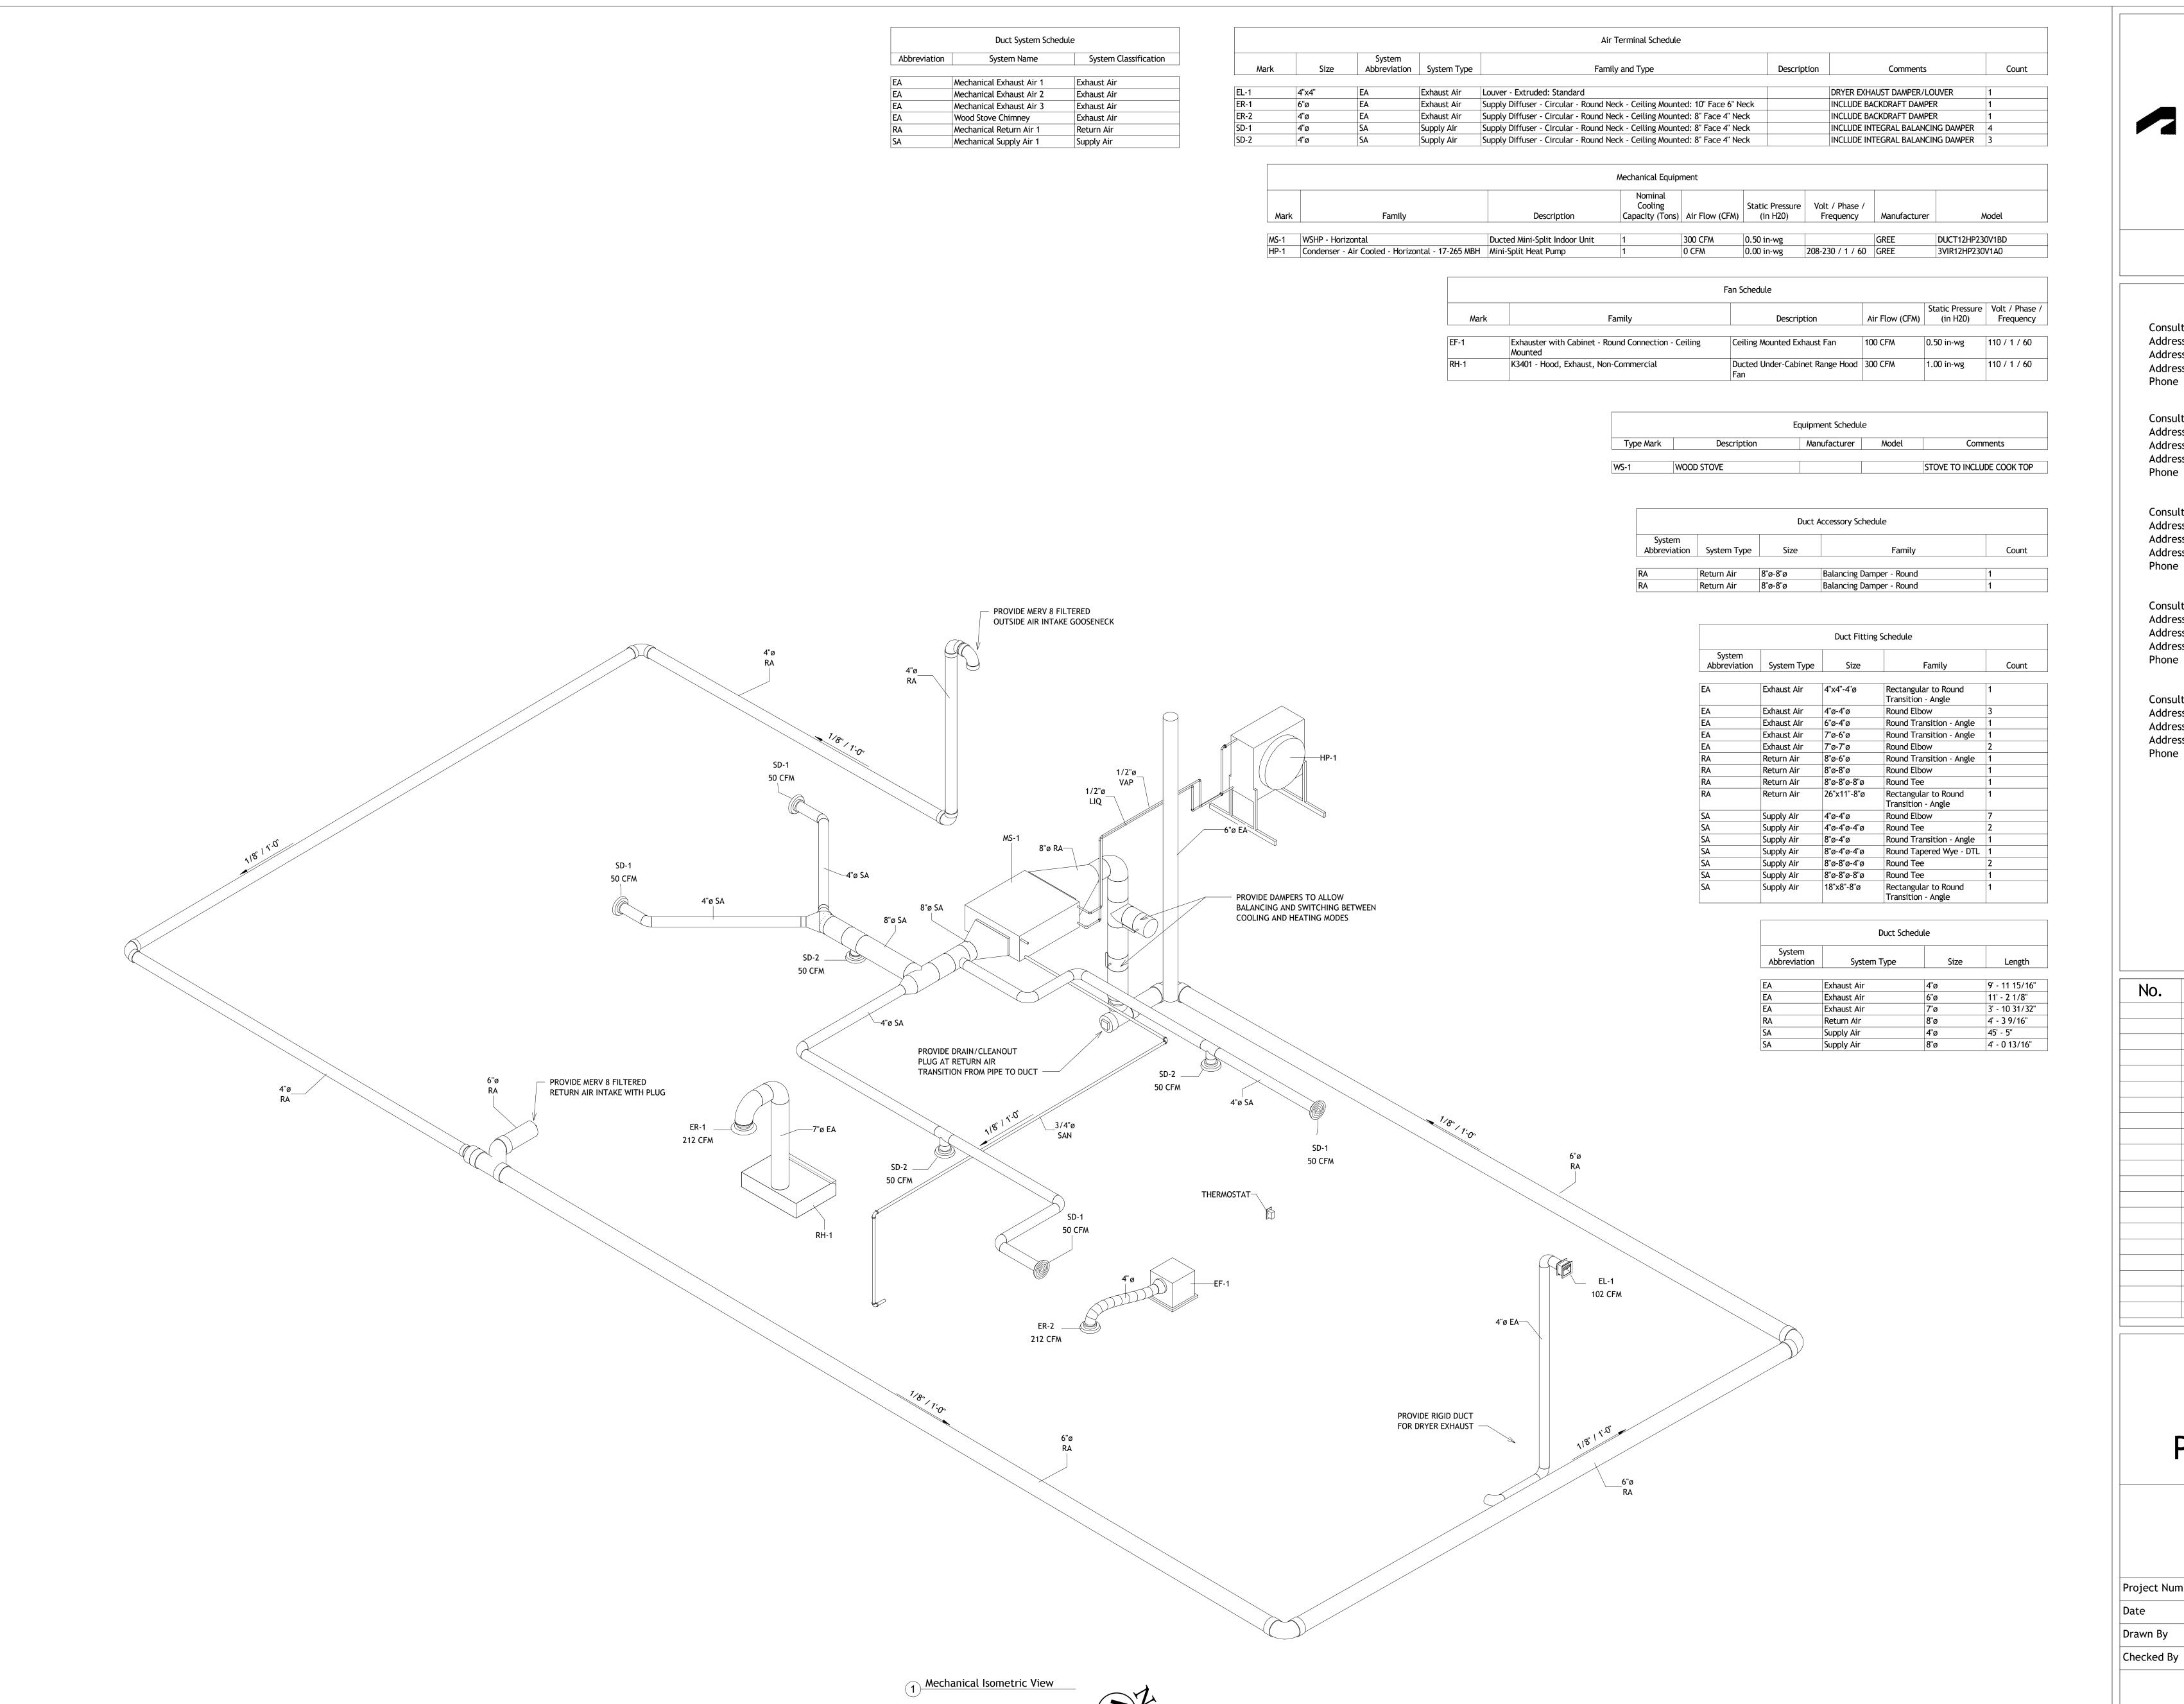



Consultant Address Address Address

Consultant

Address Address Address

Consultant

Address Address Address

> Consultant Address

Address Address

Consultant Address Address Address

No.	Description	Date


Client Name

Project Name

Mechanical Schedules

Project Number	Project Number
Date	Issue Date
Drawn By	Author
Checked By	Checker

M601

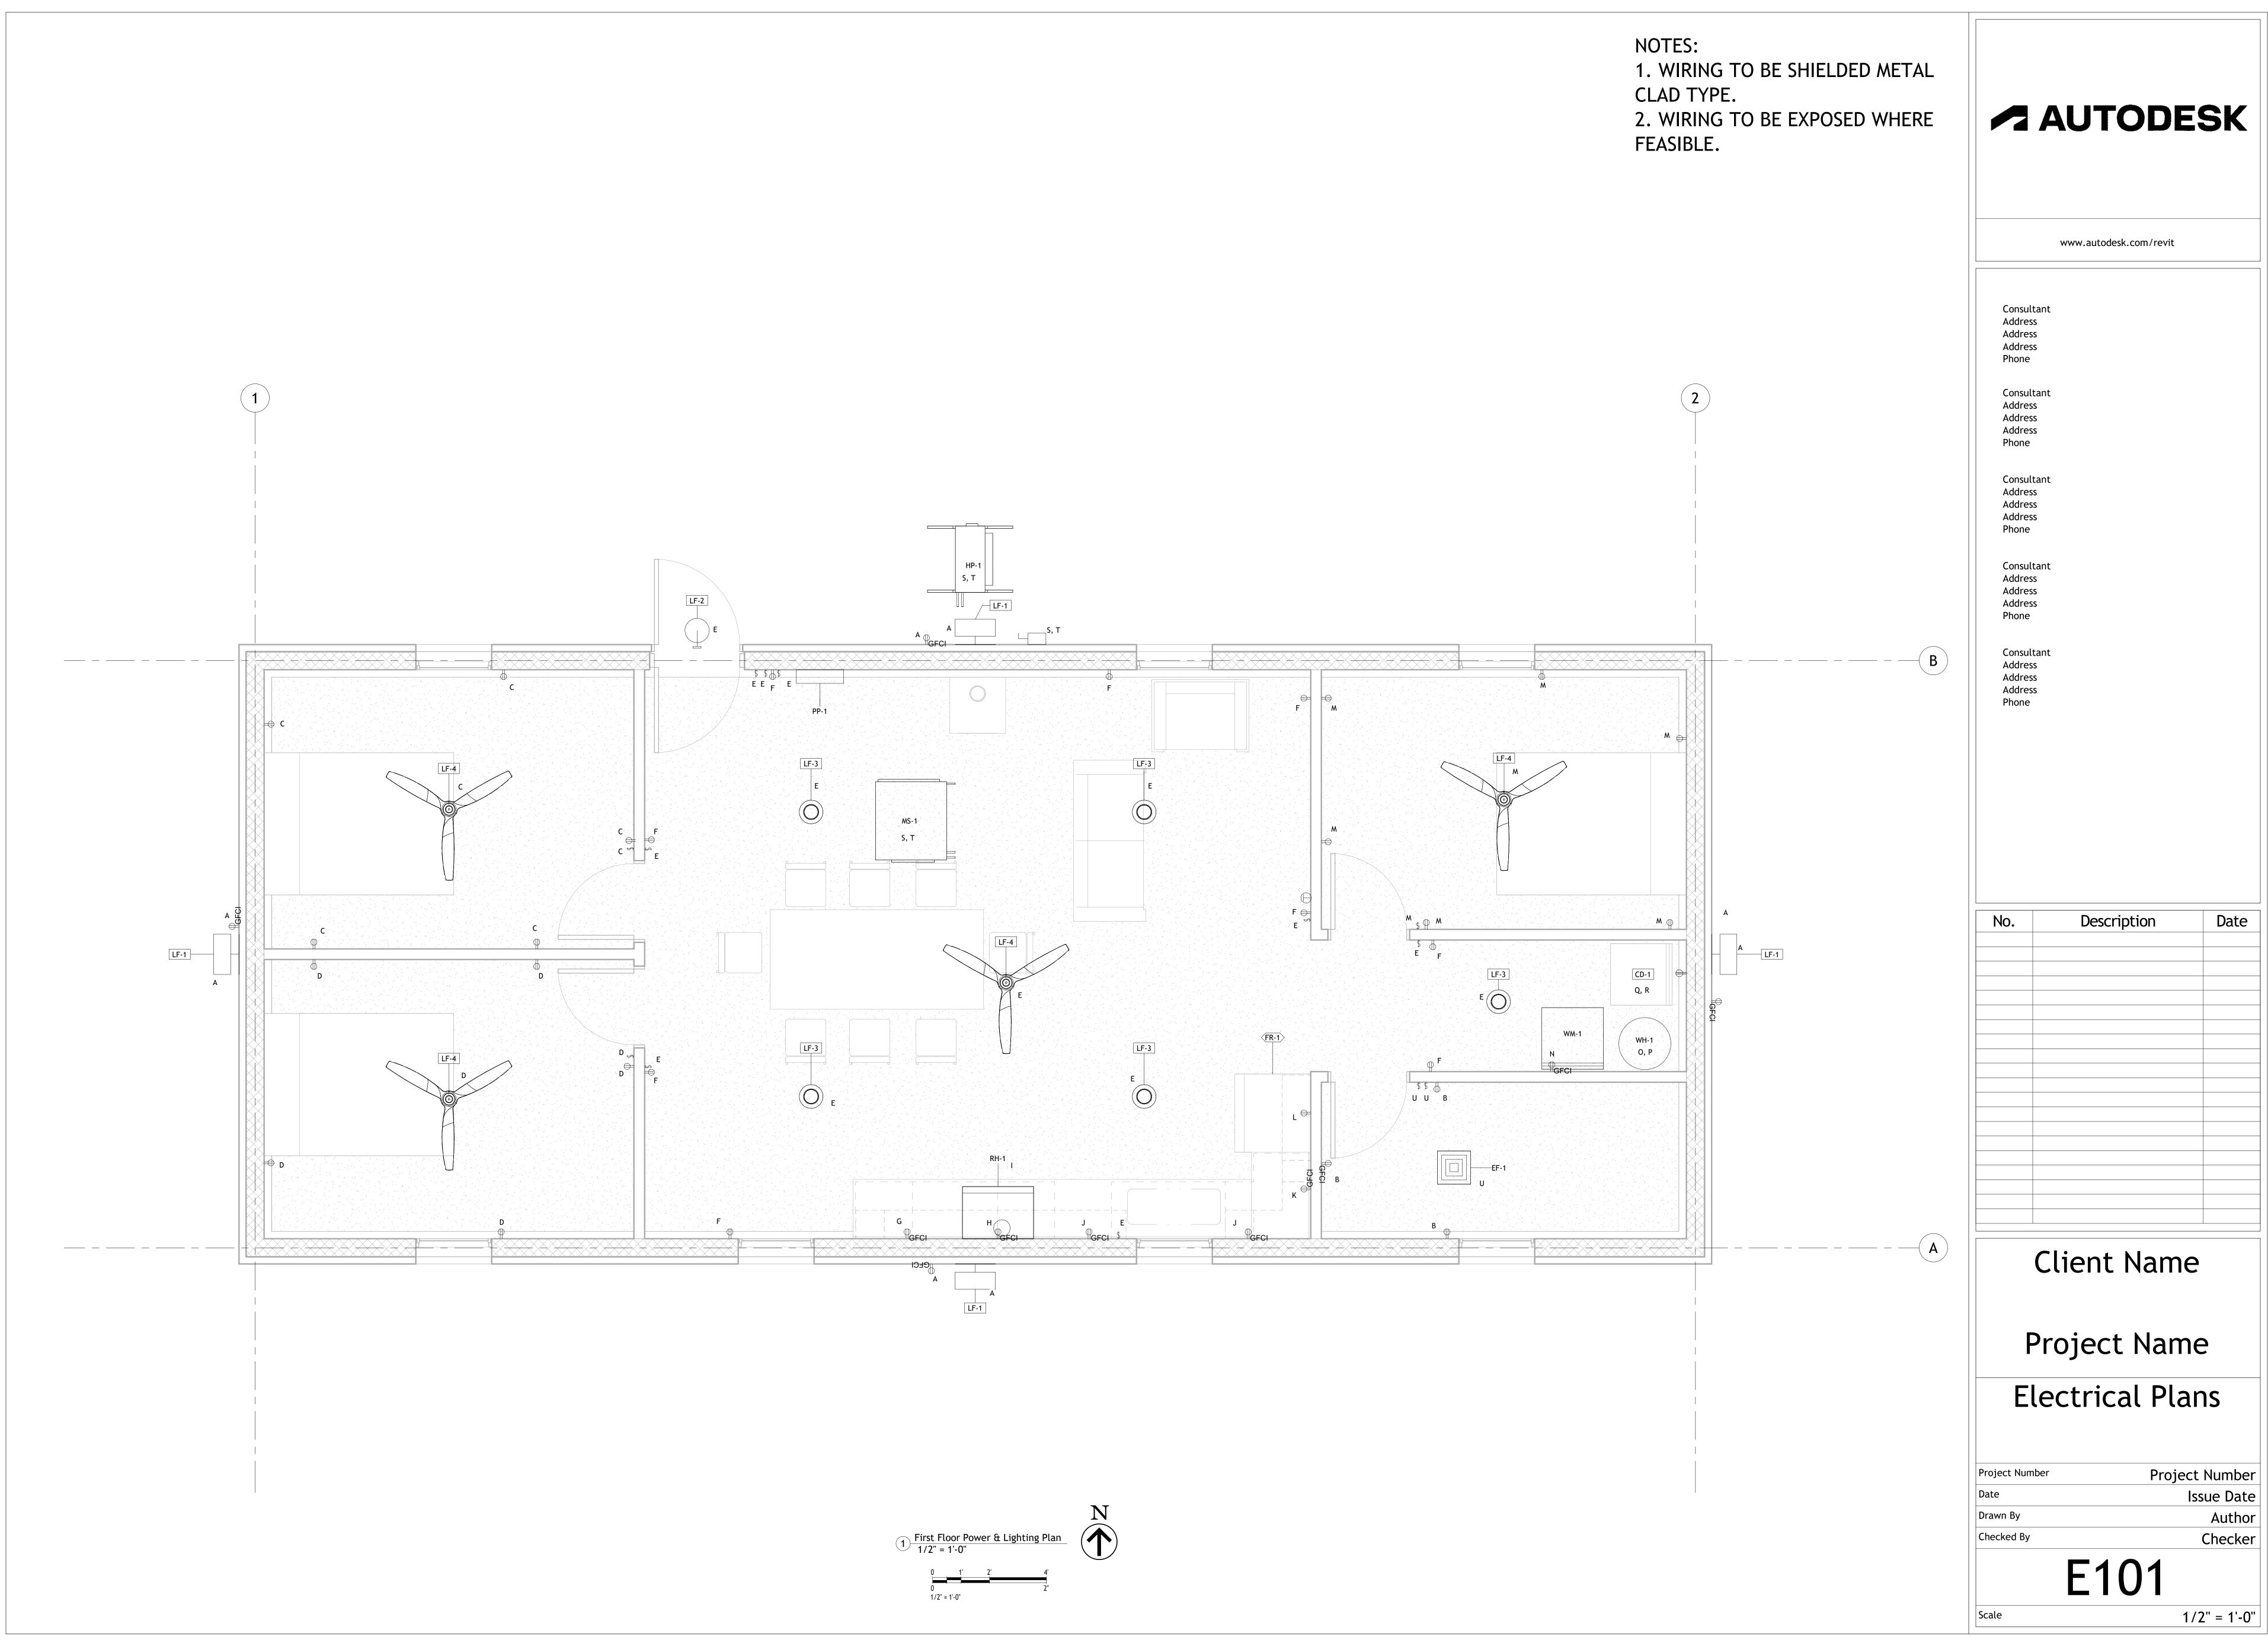

110.	Description	Date

Issue Date Author Checker

PP-1													LOCATION:	MAIN	ROOM
														+	
		•												+	
100A														YES	
TINNED COPPER													ISOLATED GROUND BUS:	NO	
-													NEUTRAL BUS:		100%
	NO	LOAD DESCRIPTION	МОСР	VOLTS	MCA	VA-A	VA-B	MCA	VOLTS	МОСР	LOAD DESCRIPTION	NO			
	1	А	20	120	5	600	1200	10	120	20	В	1			
	2	С	20	120	5	600	600	5	120	20	D	2			
	. 3	E	20	120	5	600	600	5	120	20	F	3			
	4	G	20	120	10	1200	1200	10	120	20	Н	4			
	5	l	20	120	5	600	1200	10	120	20	J	5			
	6	К	20	120	10	1200	600	5	120	20	L	6			
	7	M	20	120	5	600	600	5	120	20	N	7			
	8	0	1	1	21	5040	5040	21	240			8			
			<u> </u>		21			21				9			
			17	240											
				3	5					}		 			
				-				_			<u> </u>	-			
							0			}					
					_		0	<u> </u>		 		-			
	15	SPARE	0	0	0	0	0	0	0	0	SPARE	15			
						2025	2022								
					440		20880								
		TOTAL LOAD AMPS			112			112		 -					
	SURFACE NEMA1 MCCB 100A	SURFACE NEMA1 MCCB 100A TINNED COPPER NO 1 2 3 4 5 6 7 8 9 10 11 12 13 14	SURFACE NEMA1 MCCB 100A TINNED COPPER -	SURFACE NEMA1 MCCB 100A TINNED COPPER - NO LOAD DESCRIPTION MOCP 1 A 2 C 20 3 E 20 4 G 20 5 I 20 6 K 20 7 M 20 8 O 30 9 Q 30 10 S 15 11 U 20 12 SPARE 0 13 SPARE 0 15 SPARE 0 TOTAL LOAD VA	SURFACE NEMA1 MCCB	SURFACE NEMA1 - <td< td=""><td>SURFACE NEMA1 - - - - - - - - - - - - - - - - - <</td><td>SURFACE NEMA1 </td><td>SURFACE NEMA1 </td><td>SURFACE NEMA1 MCCB 100A TINNED COPPER - NO LOAD DESCRIPTION MOCP VOLTS MCA VA-A VA-B MCA VOLTS 1 A 20 120 5 600 600 5 120 2 C 20 120 5 600 600 5 120 3 E 20 120 5 600 600 5 120 4 G 20 120 10 1200 10 120 5 I 20 120 10 1200 10 120 10 6 K 20 120 10 1200 10 120 10 6 K 20 120 10 1200 600 5 120 10 6 K 20 120 10 1200 600 5 120 10 6 K 20 120 10 1200 600 5 120 10 7 M 20 120 10 1200 600 5 120 10 8 O 30 240 21 5040 5040 21 240 10 S 15 240 20 4800 4800 20 240 11 U 20 12 5 600 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0</td><td>SURFACE NEMA1 MCCB 100A TINNED COPPER - NO LOAD DESCRIPTION MOCP VOLTS MCA VA-A VA-B MCA VOLTS MOCP 1 A 20 120 5 600 600 5 120 20 3 E 20 120 5 600 600 5 120 20 4 G 20 120 10 1200 10 1200 10 120 20 5 I 20 120 5 600 600 5 120 20 6 K 20 120 10 1200 10 1200 10 120 20 6 K 20 120 10 1200 600 5 120 20 7 M 20 120 5 600 600 5 120 20 6 K 20 120 10 1200 600 5 120 20 7 M 20 120 5 600 600 5 120 20 8 O 30 240 21 5040 5040 21 240 30 9 Q 30 240 21 5040 5040 21 240 30 10 S 15 240 20 4800 4800 20 240 15 11 U 20 120 5 600 0 0 0 0 0 0 0 0 10 12 SPARE 0 0 0 0 0 0 0 0 0 0 0 0 0 0 10 14 SPARE 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 10 15 SPARE 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0</td><td> SURFACE NEMA1</td><td> SURFACE NEMA1</td><td> SURFACE NEMA1</td><td> SURFACE </td></td<>	SURFACE NEMA1 - - - - - - - - - - - - - - - - - <	SURFACE NEMA1	SURFACE NEMA1	SURFACE NEMA1 MCCB 100A TINNED COPPER - NO LOAD DESCRIPTION MOCP VOLTS MCA VA-A VA-B MCA VOLTS 1 A 20 120 5 600 600 5 120 2 C 20 120 5 600 600 5 120 3 E 20 120 5 600 600 5 120 4 G 20 120 10 1200 10 120 5 I 20 120 10 1200 10 120 10 6 K 20 120 10 1200 10 120 10 6 K 20 120 10 1200 600 5 120 10 6 K 20 120 10 1200 600 5 120 10 6 K 20 120 10 1200 600 5 120 10 7 M 20 120 10 1200 600 5 120 10 8 O 30 240 21 5040 5040 21 240 10 S 15 240 20 4800 4800 20 240 11 U 20 12 5 600 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	SURFACE NEMA1 MCCB 100A TINNED COPPER - NO LOAD DESCRIPTION MOCP VOLTS MCA VA-A VA-B MCA VOLTS MOCP 1 A 20 120 5 600 600 5 120 20 3 E 20 120 5 600 600 5 120 20 4 G 20 120 10 1200 10 1200 10 120 20 5 I 20 120 5 600 600 5 120 20 6 K 20 120 10 1200 10 1200 10 120 20 6 K 20 120 10 1200 600 5 120 20 7 M 20 120 5 600 600 5 120 20 6 K 20 120 10 1200 600 5 120 20 7 M 20 120 5 600 600 5 120 20 8 O 30 240 21 5040 5040 21 240 30 9 Q 30 240 21 5040 5040 21 240 30 10 S 15 240 20 4800 4800 20 240 15 11 U 20 120 5 600 0 0 0 0 0 0 0 0 10 12 SPARE 0 0 0 0 0 0 0 0 0 0 0 0 0 0 10 14 SPARE 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 10 15 SPARE 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	SURFACE NEMA1	SURFACE NEMA1	SURFACE NEMA1	SURFACE

1 PP-1 PANEL SCHEDULE NTS

Lighting Device Schedule

Family and Type

Count

Lighting Switches: Single Pole

13

Lighting Fixture Schedule					
Type Mark	Family and Type	Count			
LF-1	Wall Pack Light - Exterior: 120V	4			
LF-2	Wall Lamp - Bracket: 100W - 120V	1			
LF-3	Ceiling Light - Flat Round: 60W - 120V	5			
LF-4	33719: 33727 ALO LED White ceiling fan	4			

	Electrical Equipment Schedule					
Type Mark	ark Family and Type					
PP-1	Lighting and Appliance Panelboard - 208V MLO: 100 A					
DS-1	Disconnect Switches: 240V - Non-Fusible 30A					

	Electrical Fixture Schedule		
Type Mark	Family	Туре	Count
GFCI-1	Duplex Receptacle	GFCI	11
DR-1	Duplex Receptacle	Standard	28
TR-1	Receptacle - 220V	Standard	1



www.autodesk.com/revit

Consultant Address Address Address Phone
Consultant Address Address Address Address Phone
Consultant Address Address Address Abdress Phone
Consultant Address Address Address Address Phone
Consultant Address Address Address Phone

No.	Description	Date

Client Name

Project Name

Panel Schedule

	Project Number	Project Number
	Date	Issue Date
	Drawn By	Author
	Checked By	Checker
	T. Control of the con	

E601

Author
Checker

12" = 1'-0"